



Premia[®]

Bean-to-Batch Medium to High Volume Coffee Brewer

with Auto Clean



PROGRAMMING MANUAL

For Technical Service, contact Bunn-O-Matic Corporation at 1-800-286-6070.

Bunn-O-Matic Corporation

Post Office Box 3227, Springfield, Illinois 62708-3227

Phone (217) 529-6601 | Fax (217) 529-6644

BUNN-O-MATIC COMMERCIAL PRODUCT WARRANTY

Warranty statements and information can be found on our website.

Please visit <https://commercial.bunn.com/support/warranty-lookup> for further details.

TIPS:



To **Search/Find** content in this document, use "**Ctrl+F**" (PC)



To **Search/Find** content in this document, use "**Command+F**" (Mac)

CONTENTS


BUNN-O-MATIC COMMERCIAL PRODUCT WARRANTY	2
OPERATING INTERFACE.....	4
Customer Interface.....	4
ADA Interface.....	4
Notice Dashboard	5
PROGRAMMING MENU.....	6
Cleaning.....	6
Daily Cleaning.....	7
Touchscreen	8
training	8
Reservoir Removal	9
Reservoir Cleanliness.....	10
Cleaning notices	11
Notices	12
Reservoirs.....	13
Setup.....	15
Recipes.....	16
Coffee	19
Schedules	20
Products.....	21
Product Calibration	23
Product Setup	27
Beverages Offered.....	28
Bean Hoppers.....	28
Carafe	29
Reservoir Schedule.....	30
Override Reservoir Schedule.....	31
Machine Settings.....	31
Temperature Adjustment.....	31
Reservoirs.....	33
Bean Hopper.....	33
Grounds	34
BUNNlink	34
Audio Alerts	34
Service Information.....	35
Factory Reset.....	35
Service	36
Statistics.....	36
Date and Time.....	37
Languages	37
Reminders.....	38
Cleaning.....	38
Preventive Maintenance.....	39
Water Filters.....	40
Your Brand	41
Dispense Screen	41
Screen Saver	41
Add.....	42
Import.....	43
Export	44
EXPORTING DATA USING USB.....	45

OPERATING INTERFACE

Customer Interface


The first screen to appear is the Customer Interface screen, also known as the Home Screen.

1. After placing a cup under one of three dispense stations, available drinks are dispensed by pushing and holding the onscreen button below the beverage of choice. Unavailable drinks will have a faded appearance until product has been refilled.

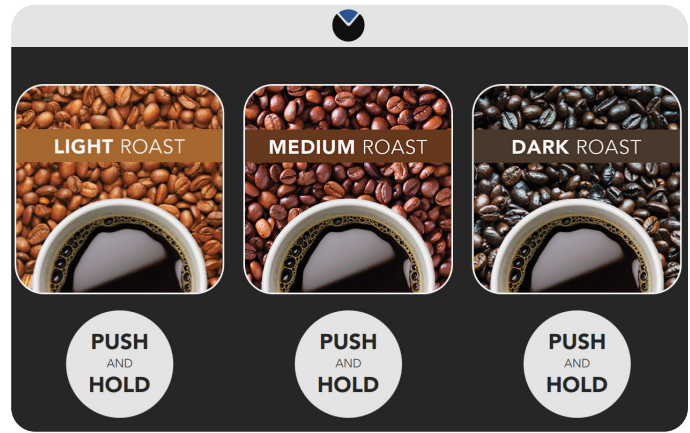

ADA Interface


1. To activate the ADA screen interface, the user must press the Accessibility symbol (wheelchair icon).
2. When activated, the selected item will have a green highlight around the item.
3. Navigate around the screens using the Left and Right arrows on the ADA interface.
 - a. Select a beverage.
 - b. Press and hold the OK button to dispense.
 - c. Pressing the X cancels the selection.

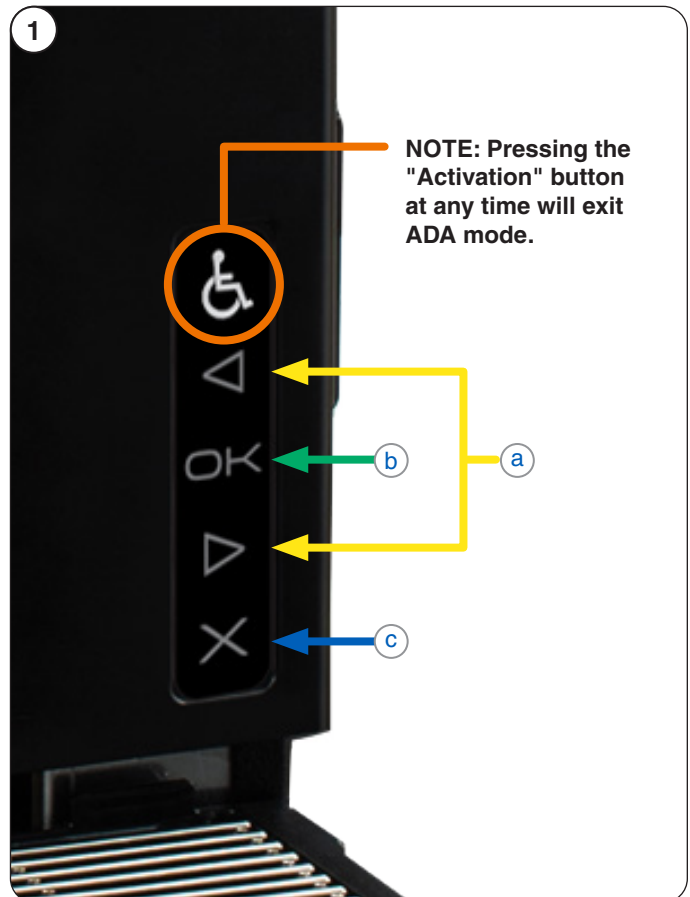

OPERATING INTERFACE

Continued from previous page

NOTE: A description of the button functions is shown when the Accessibility symbol (wheelchair icon) is in use.

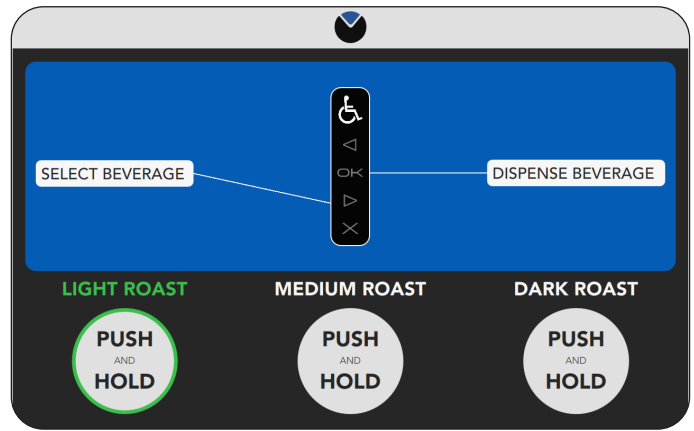



Notice Dashboard

How to Access:


1. **TAP** on the BUNN logo banner and the Information Screen appears on the display.

The Information Screen will display the status of the following:

- **Bean Hoppers:** Displays status of beans in the hopper and will alert when empty.
- **Active Notices:** Displays if there are any active faults that have occurred.
- **Grounds/Waste Bin:** Displays the status of the grounds bin and will alert when full.

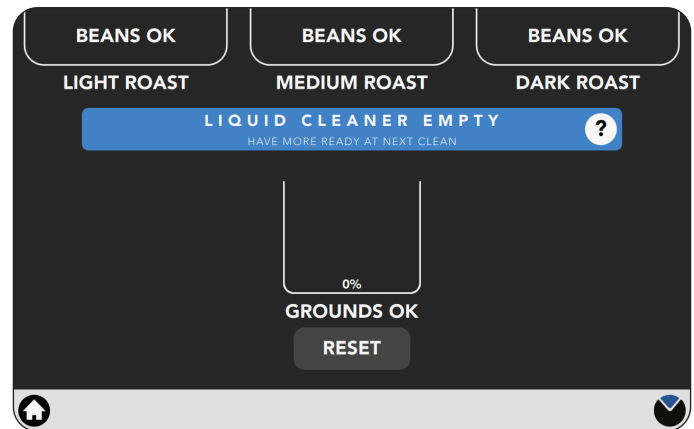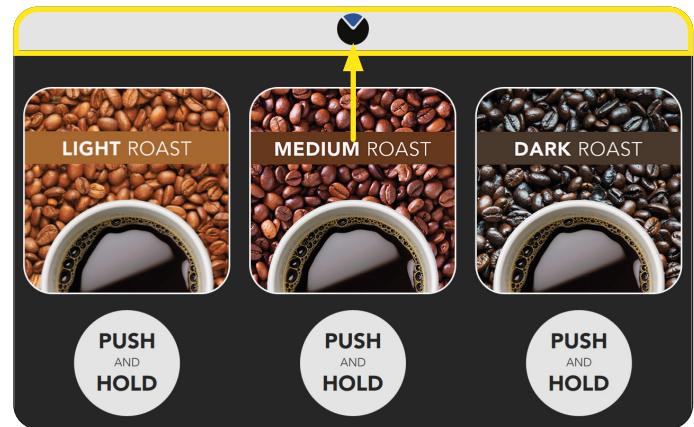

Examples of Information Screen notices

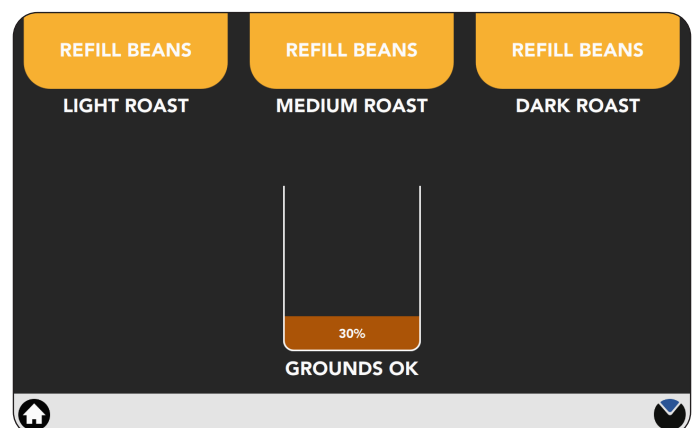



PROGRAMMING MENU

How to Access:

1. **Press and hold** the BUNN logo for a few seconds until the Programming Menu screen appears on the display.


The Programming Menu screen contains a menu of items that can be accessed easily. Use the touchscreen to select a menu item.

- **Cleaning:** This icon will advance to options available for automated cleaning processes.
- **Notices:** The screen will display any faults that have occurred, give probable causes, and a solution to clear the fault.
- **Reservoirs:** The screen will display the fill levels and current status for each removable reservoir.
- **Setup:** This icon will advance to another menu after entering a passcode (6601).
- **Fill Reservoirs:** This icon will resume filling for reservoirs if the process has been paused. This icon will also pause reservoir filling if it is active. Green means reservoir filling is active and red means reservoir filling is paused.

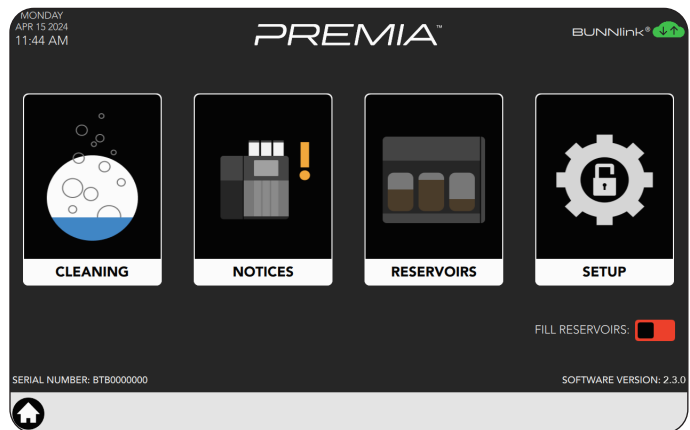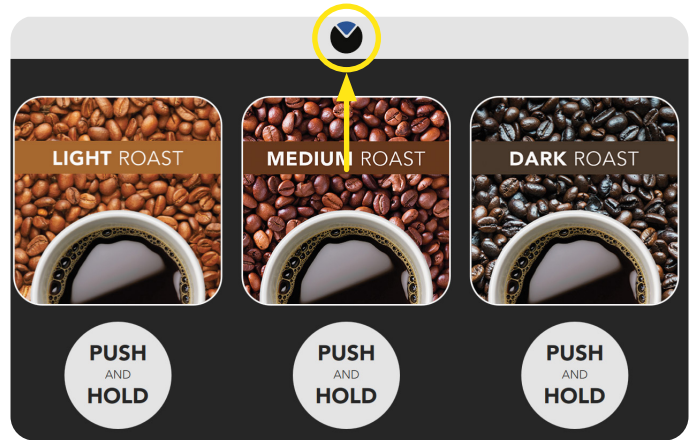


Cleaning

Select Cleaning icon.

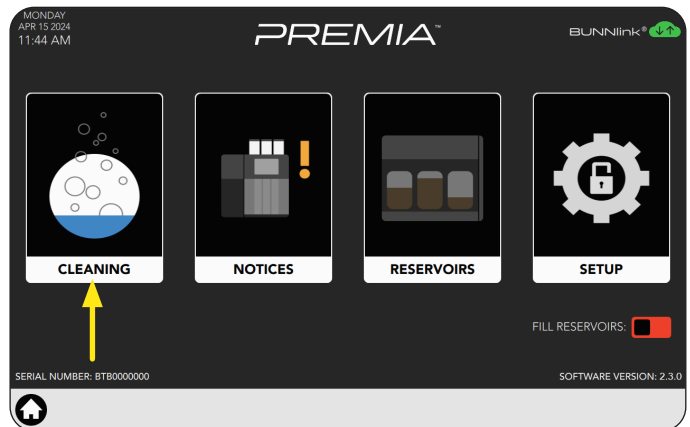

Cleaning Menu

- a. **Daily/Weekly Cleaning:** Select this icon to begin a cleaning cycle.
- b. **Touchscreen:** Select this icon to deactivate the display for a brief period to allow for touchscreen cleaning.
- c. **Training:** Select this icon to view the weekly cleaning steps for training purposes.
- d. **Reservoir Removal:** Select this icon to unlock the cabinet for reservoir removal.
- e. **Reservoir Cleanliness:** Select this icon to view the status of each reservoir. The status is color coded to indicate how well the reservoirs have been manually cleaned.

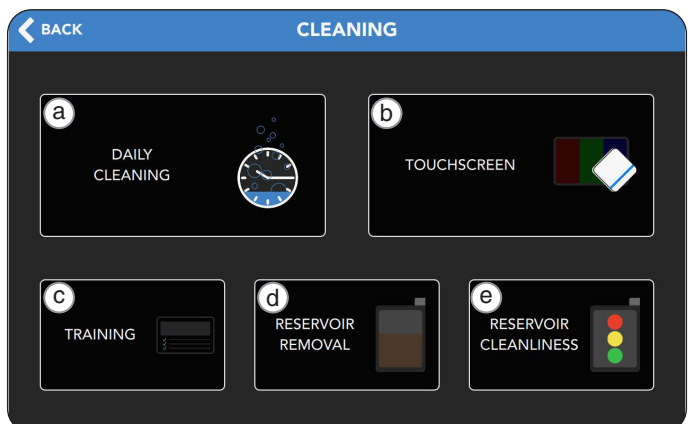

PROGRAMMING MENU

Continued from previous page

DAILY CLEANING

Select Daily Cleaning icon.

NOTE: The default DAY and TIME for cleaning from the factory is Monday at 9:00 pm.

These settings can be changed in the Reminders section under Cleaning.

NOTE: Based on the set time for cleaning, the machine will lock out if it is not cleaned within 2 hours of the scheduled time. A cleaning cycle will need to be performed for the unit to continue operation.



Cleaning Screens

1. Shows date and time of last completed cleaning and when the next cleaning is due.
2. Extra Steps shows more details when a deep clean is due.
3. Press Start button to begin cleaning process.




4. When cleaning is in process, a notice that "Dispense Not Available" will appear until finished.

NOTE: Tapping the screen will show more information about the progress of the cleaning.



5. From this screen, selecting the STOP button will end the process.

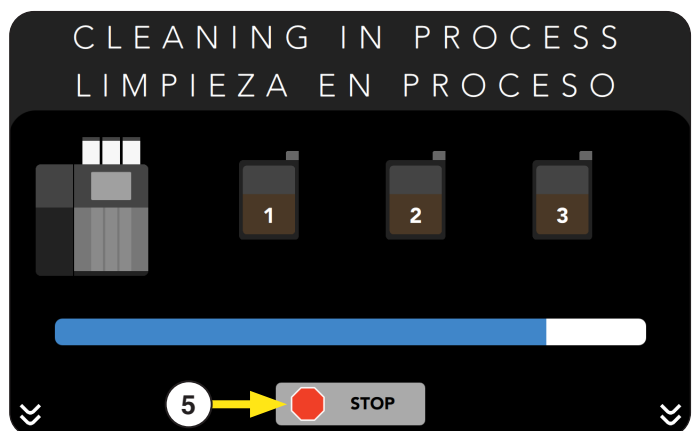

PROGRAMMING MENU

Continued from previous page


TOUCHSCREEN

Select Touchscreen icon.




The touchscreen is deactivated for 10 seconds so that it can be cleaned with a soft cloth.

NOTE: The screen can be deactivated again if more cleaning time is needed.

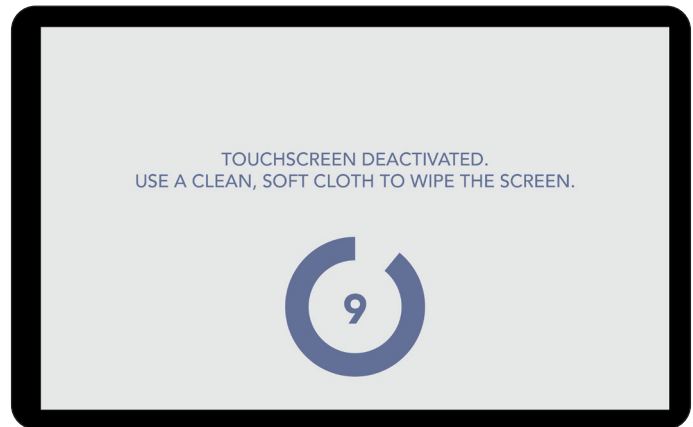


TRAINING

Select Training icon.

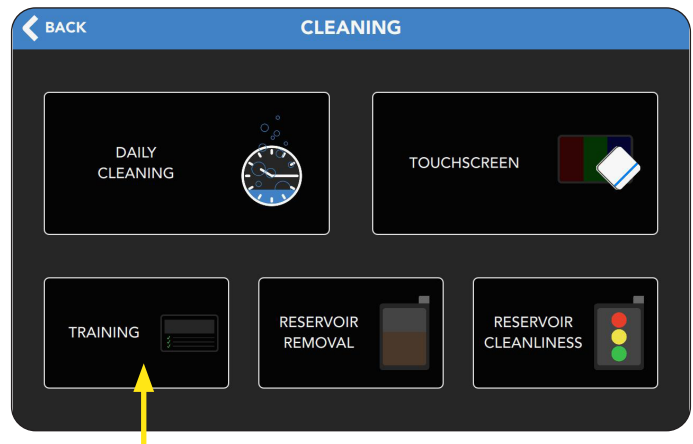

1. Training will walk through the manual cleaning steps, requiring doors to be opened, Drip Tray removed, etc.
2. Select Next button to start the biweekly cleaning process that is shown step-by-step in pictures.

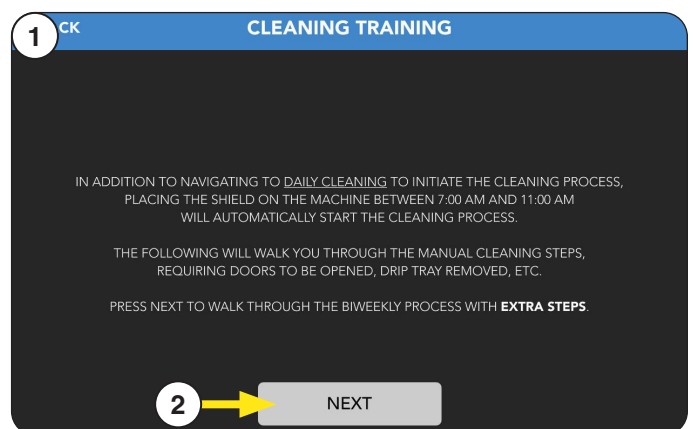


PROGRAMMING MENU


Continued from previous page

RESERVOIR REMOVAL


Select Reservoir Removal icon.

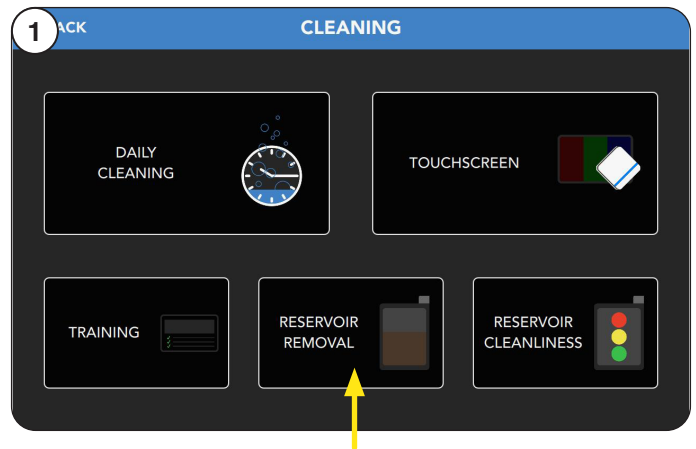

This Reservoir Removal screen gives information for each of the reservoirs in the machine, including how much time it will take to drain them before they can be removed.

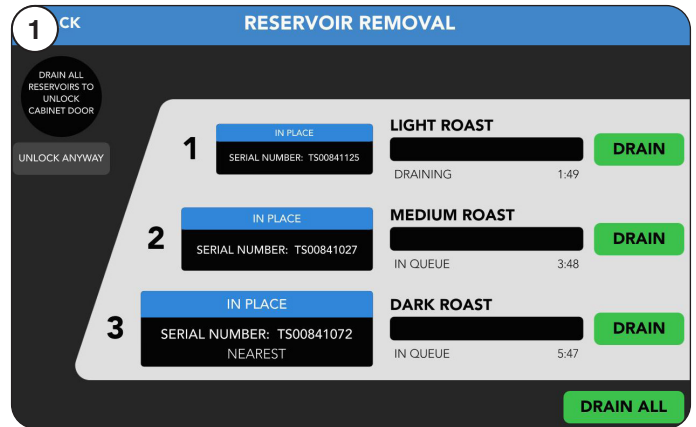

NOTE: A Warning of “Reservoirs May Contain Hot Liquid” will appear if reservoirs are removed before they are drained completely.

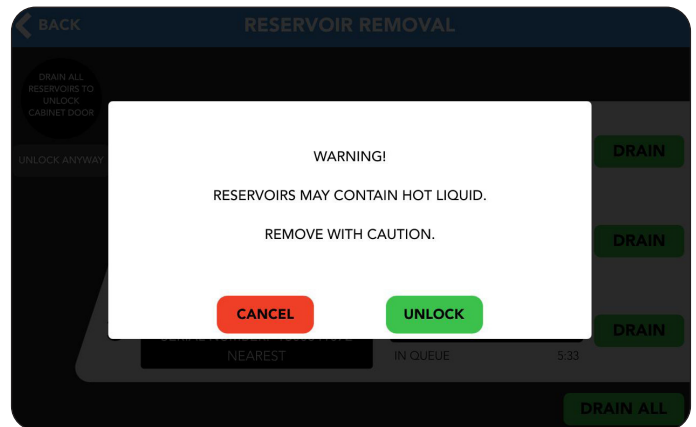


PROGRAMMING MENU

Continued from previous page

RESERVOIR CLEANLINESS

Select Reservoir Cleanliness icon.

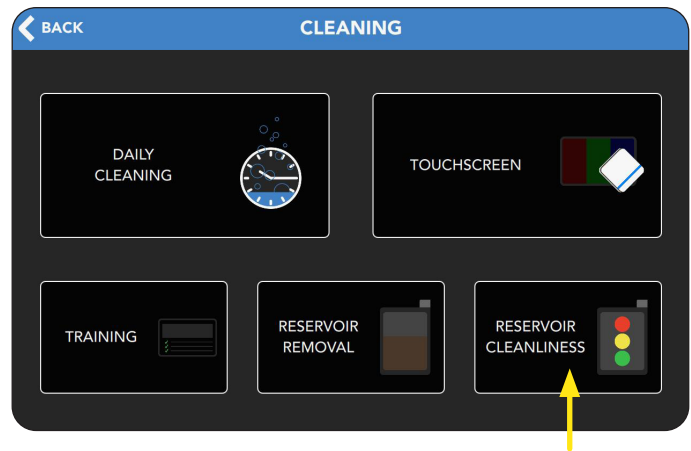


Dot color represents level of cleanliness for each reservoir.

- Green = Clean
- Yellow = Moderately Clean
- Red = Cleaning Recommended

NOTE: If cleaning is needed; go back to the Reservoir Removal icon to remove the reservoir(s) and perform a manual cleaning.



Example of all three reservoirs with a clean status.

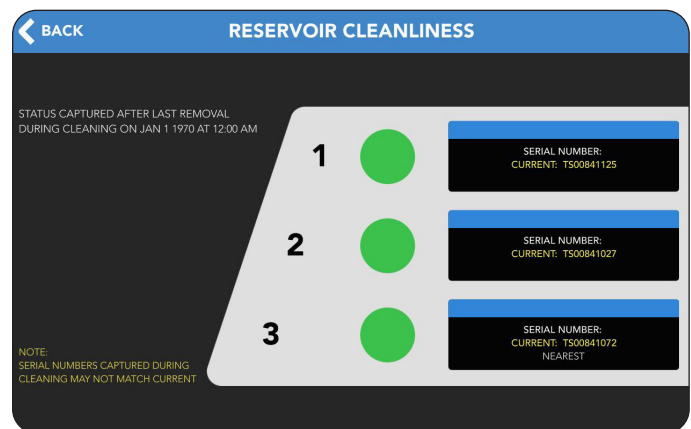


PROGRAMMING MENU

Continued from previous page


CLEANING NOTICES

There are several ways that notices are shown when a scheduled cleaning is due or when liquid cleaner is low and needs to be filled.

1. Reservoir Screen shown with blue banner noting that liquid cleaner needs to be added before next cleaning.
2. A Notice at the bottom of the screen saying "Liquid Cleaner Empty – Have more ready at next clean" noting that the liquid cleaner needs to be filled before the next cleaning process.

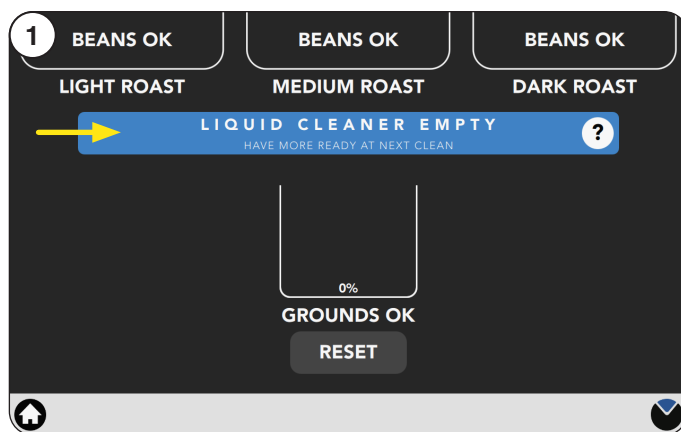


3. An error in Notices gives a description of the error and the suggested action to fix the error.
EXAMPLE: "Liquid Cleaner Lockout" – Have new liquid cleaner ready and perform cleaning, following the on-screen prompts to refill.

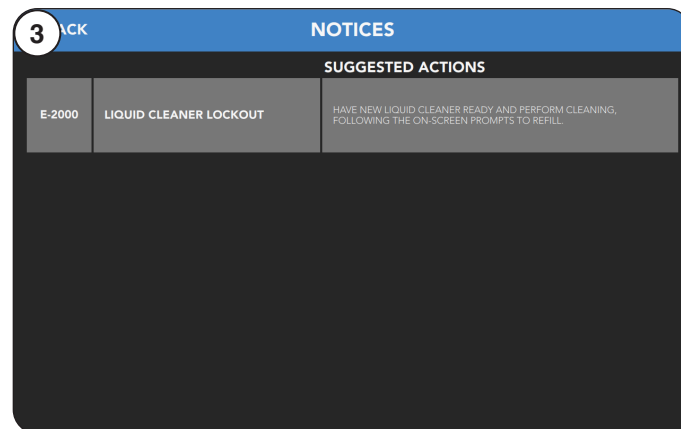

NOTE: The default DAY and TIME for cleaning from the factory is Monday at 9:00 pm.

This setting can be changed in Cleaning Reminders.

NOTE: If cleaning time is set for 9:00 pm, the machine will lock out if it is not cleaned within 2 hours of the scheduled time. A cleaning cycle will need to be performed for the unit to continue operation.

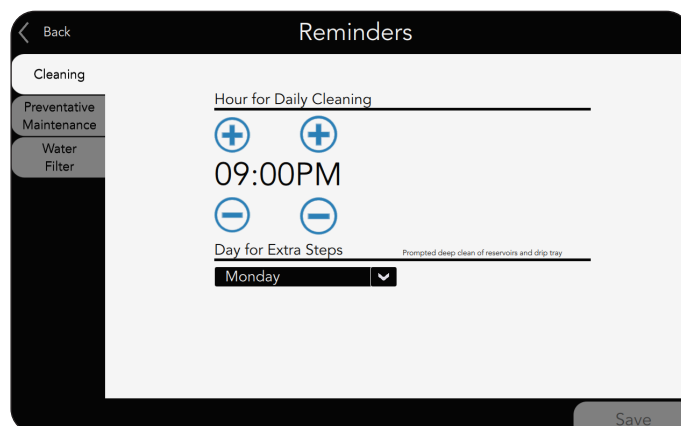


PROGRAMMING MENU


Continued from previous page

Notices

Select Notices icon.

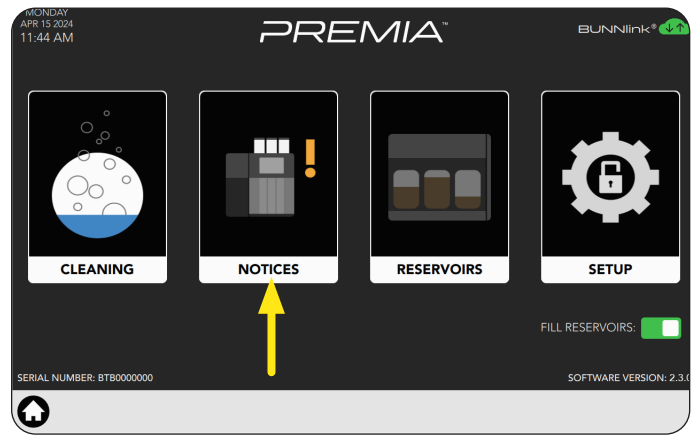

The screen will display the code and description of any faults that have occurred, give probable causes, and a solution to clear the fault.

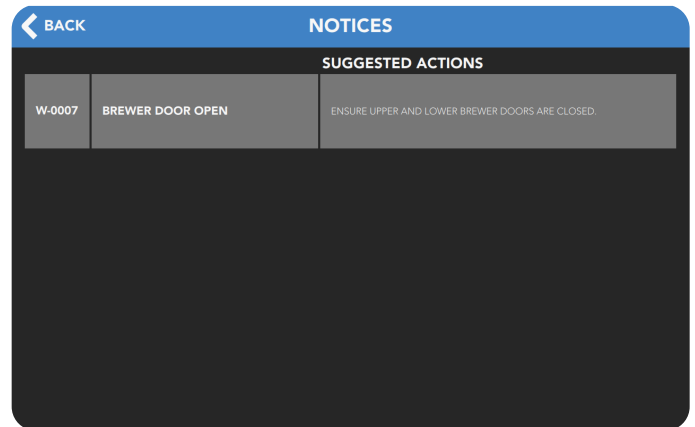


PROGRAMMING MENU

Continued from previous page


Reservoirs

When the machine is being set-up for the first time and the initialization sequence is complete, the User Interface screen will appear.

1. **Press and hold** the BUNN Logo for a few seconds until the Reservoirs screen appears.


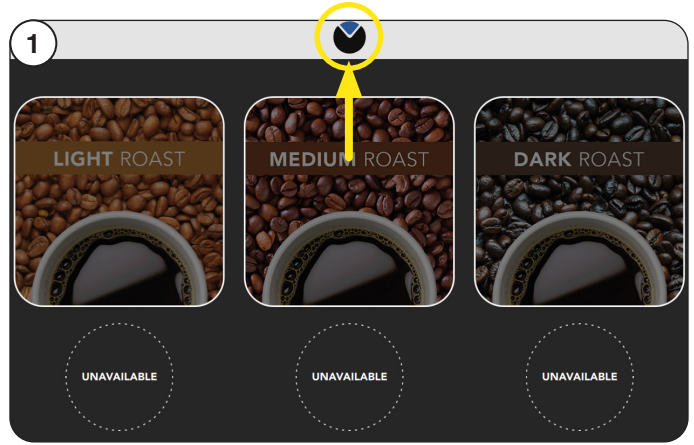


2. Select Unlock Cabinet Door button to open cabinet door.

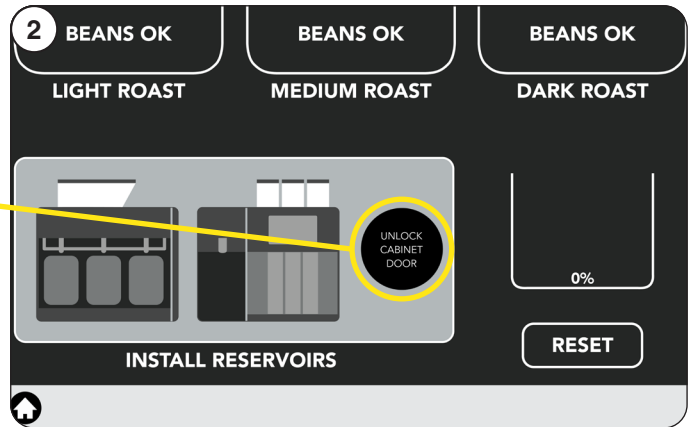


3. A countdown of 5 seconds will start. If not opened, the Unlock Cabinet Door button will need to be pressed again.

NOTE: The position number of each reservoir from front to back is 3, 2, 1.

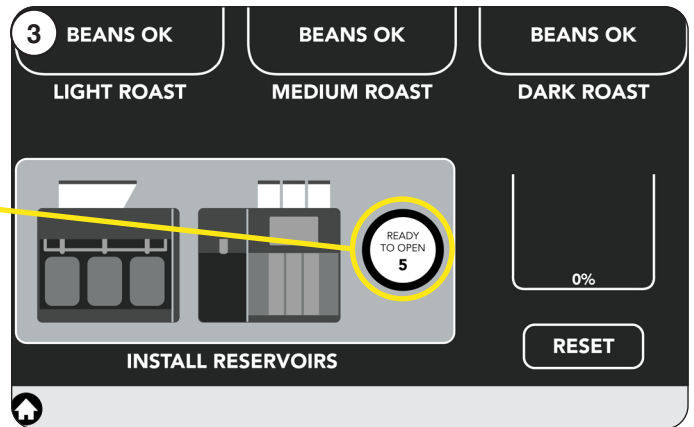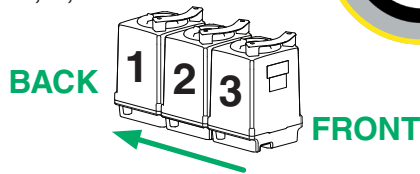

How to access Reservoirs if the machine is already setup:

1. **Press and hold** the BUNN logo for a few seconds until Programming Menu appears on the display.

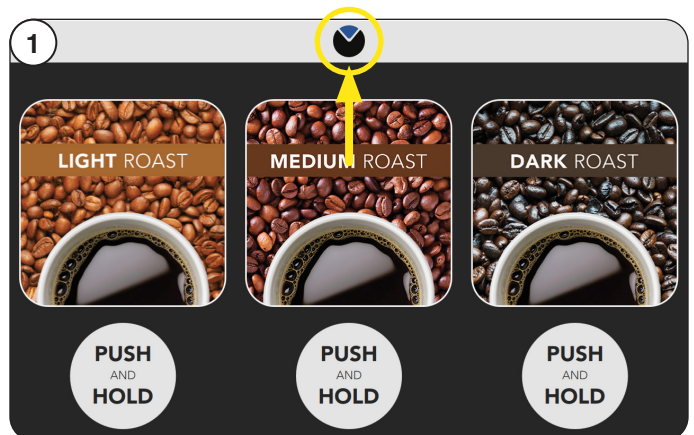


PROGRAMMING MENU

Continued from previous page


2. Select the Reservoirs icon.

NOTE: If a reservoir is removed, the number of the reservoir will be shown on screen.


Example: "Reservoir 3 removed".

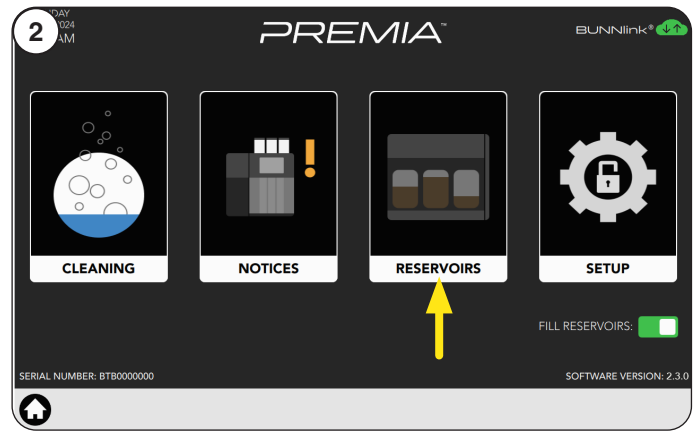


3. This screen will display the volume level for each reservoir. The Fill button onscreen will initiate a filling sequence for the corresponding reservoir up until the Fill line.

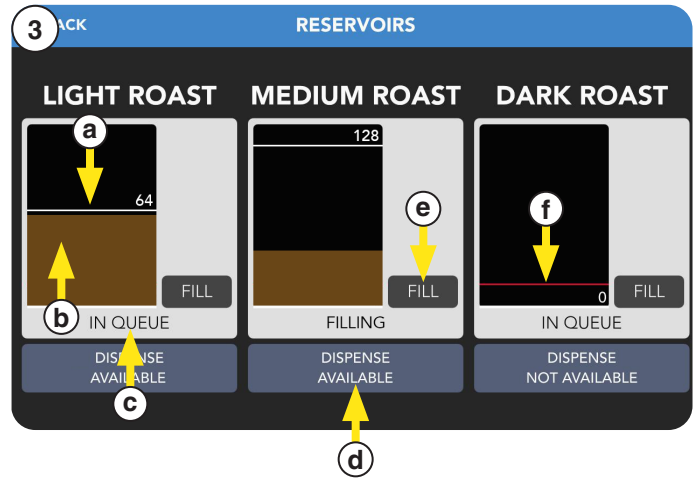

- White line** is current reservoir fill level. White line means coffee is available to dispense, plus number shows the amount of coffee programmed to be brewed.
- Brown area** shows coffee available in reservoir.
- Text below reservoir box shows current reservoir status. **Filling, Draining, Rinsing, in Queue...**
- Lower rectangular box shows if dispense is **Available** or **Not Available**
- Fill Button** will override current reservoir schedule and allow user to select from any fill level. Reservoir will automatically be filled to the selected level then return to running off of the schedule.
- Red line** is current set level. Red means coffee is unavailable.

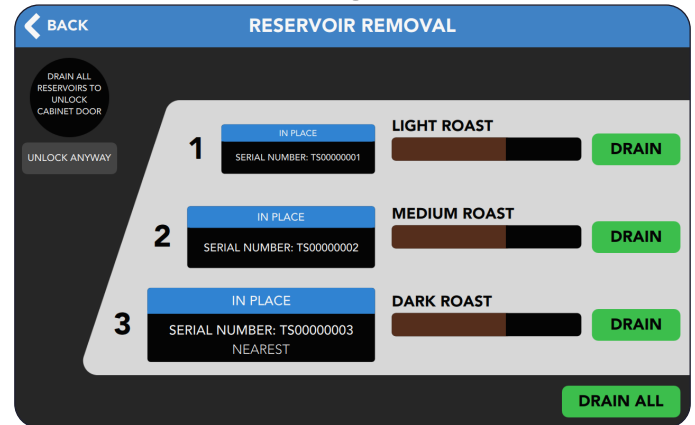

NOTE: If reservoirs are removed without draining then a warning screen will show to remove with caution because they may contain hot liquid.

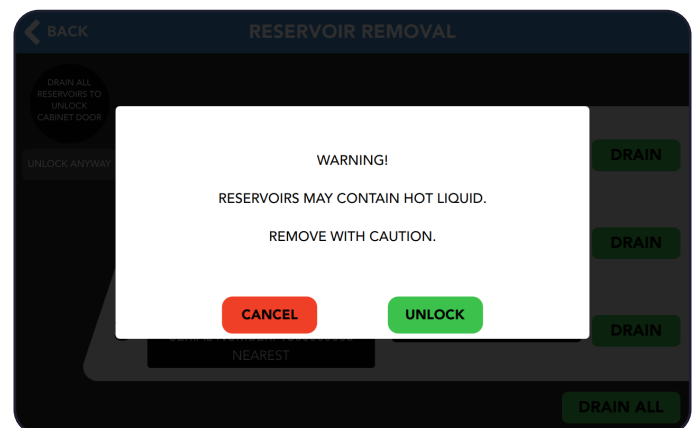


PROGRAMMING MENU

Continued from previous page

Setup

1. Select Setup icon.

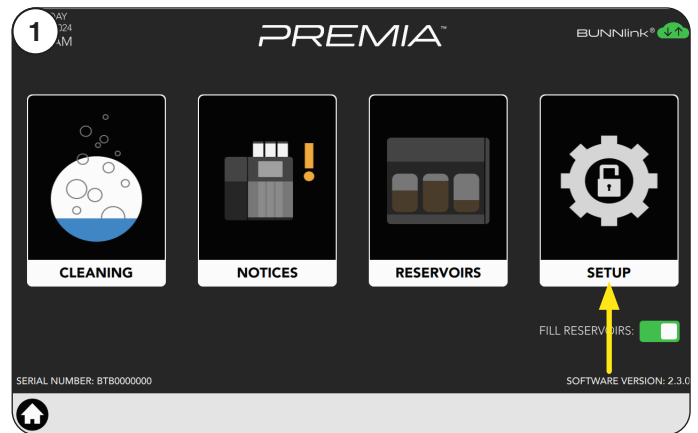


2. Enter passcode 6601.



3. The Setup Menu screen contains a group of items that can be accessed behind a passcode. Use the touchscreen to select a menu item.

- **Recipes:** This icon will advance to options available for editing recipes, schedules, and available products (beans).
- **Product Setup:** This icon will advance to options available for assigning recipes to each reservoir and dispense points and products (coffee beans) to hoppers.
- **Reservoir Schedule:** This icon will advance to options available for setting up reservoir hold volumes.
- **Machine Settings:** This icon will advance to options available for settings and functions related to brewer operation.
- **Service:** This icon will advance to options available for testing components and sensors for diagnostic purposes and troubleshooting.
- **Statistics:** This icon will advance to information related to daily and lifetime drink counts.
- **Date and Time:** This icon will advance to options available for setting Date, Time and Measurements.
- **Reminders:** This icon will advance to options available for operational reminders.
- **Your Brand:** This icon will advance to options available for customizing the brewer.

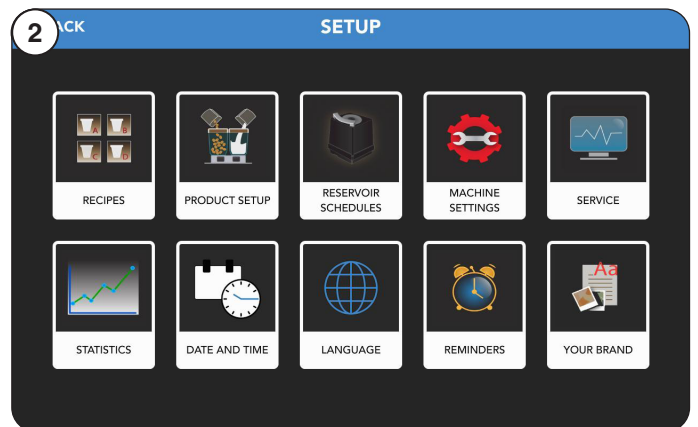


SETUP MENU

Continued from previous page

RECIPES

Select Recipes icon.

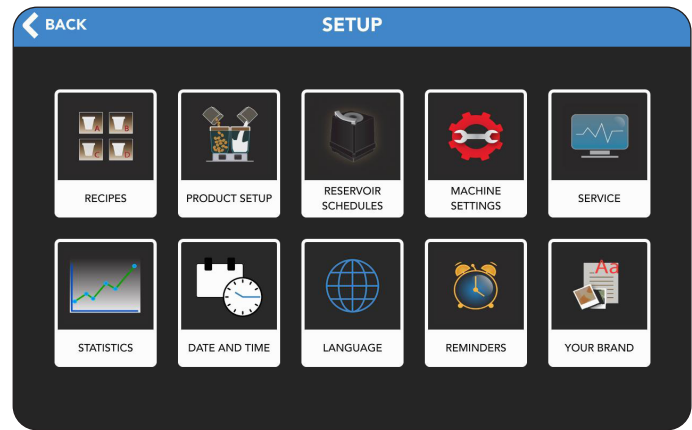


The Recipes screen contains multiple pages that can be accessed by selecting a tab on the left of the screen and is used to edit both Products and Recipes:

- **Recipes:** This tab will allow the operator to enable, modify, add, reset or delete recipes stored in the brewer.



- **Products:** This tab will allow the operator to enable, modify, add, reset or delete products (coffee beans) stored in the brewer.

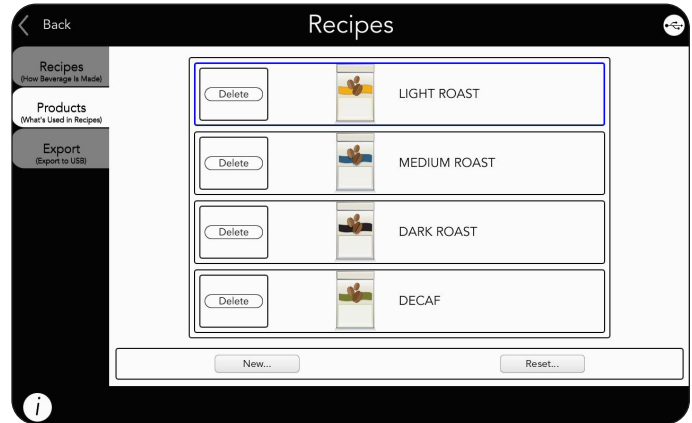

- **Export:** This tab will allow the operator to export recipes to a USB stick.





SETUP MENU

Continued from previous page


Creating Recipes

This tab allows the operator to enable, modify, add, reset or delete recipes stored in the brewer.

1. Select the Recipe tab and press the New button.
2. Or, edit an existing Recipe.
For this example, we will select Light Roast to edit.
3. Now choose the General tab.

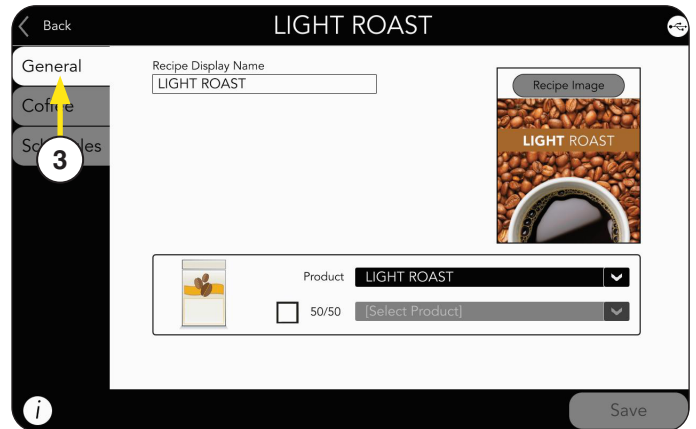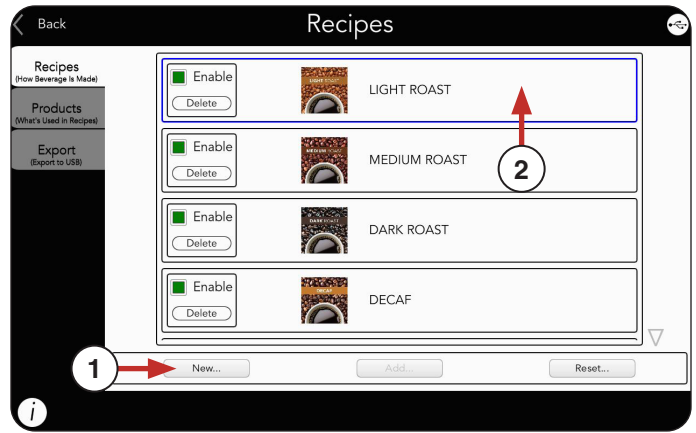


4. Use the Drop Down menu to select the preferred coffee Product. This will be the coffee bean that is used for this recipe.
Ensure this product is assigned to a hopper and is the product you want to use.

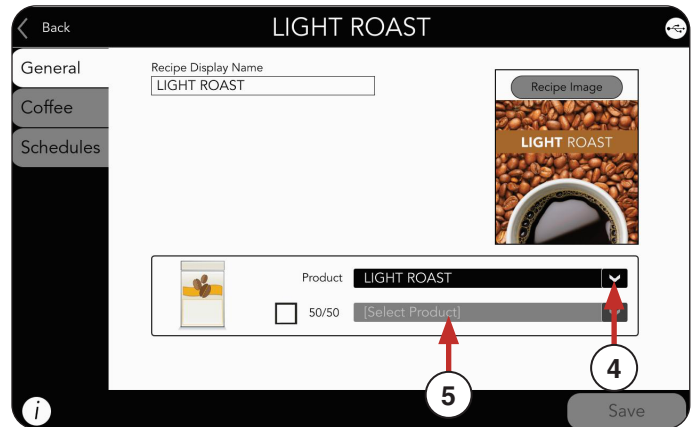

5. We will use the Product called "Medium Roast" for this example.


6. Edit the Recipe Name by pressing in the text field.
An editing screen will appear.

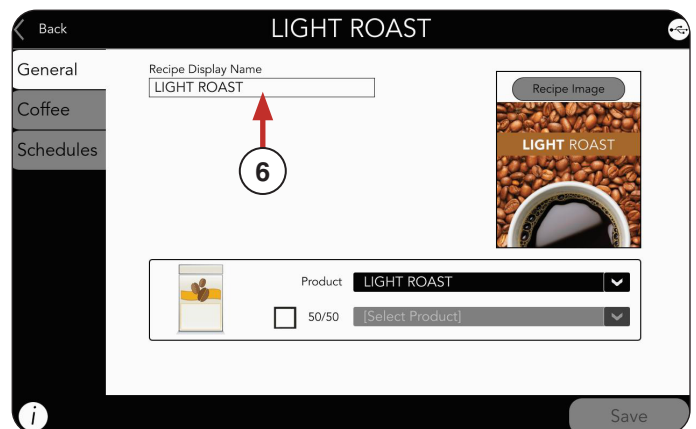


SETUP MENU

Continued from previous page


7. Click in the text field and type a new recipe name, if preferred.
8. Press the Return key to complete edit if changes were made.

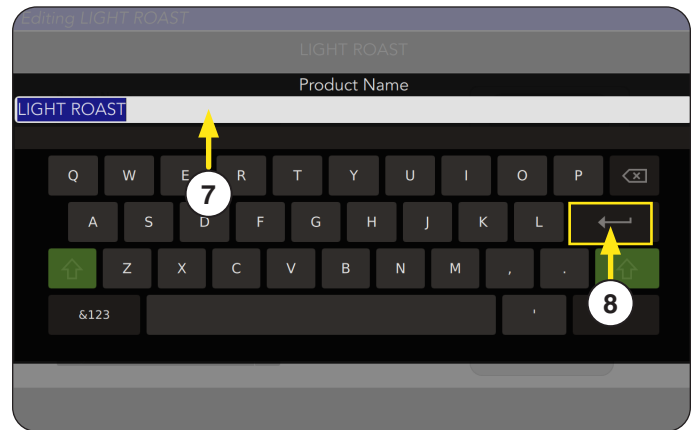

9. Next, the Recipe Image can be changed, if preferred.

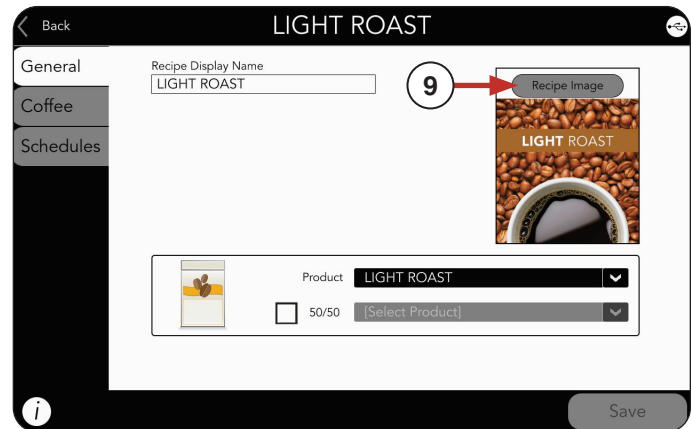

10. By swiping side-to-side, you can see the icon library.

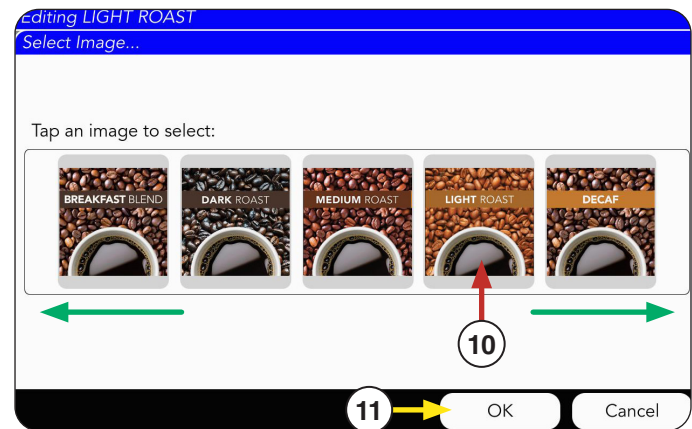


11. Select the image, and press OK.

SETUP MENU


Continued from previous page

COFFEE

1. Choose the Coffee tab to edit your recipe.

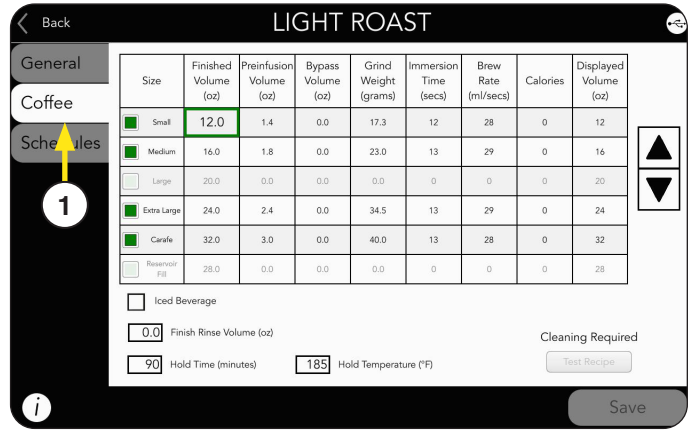


NOTE: Each size with a green box is enabled.

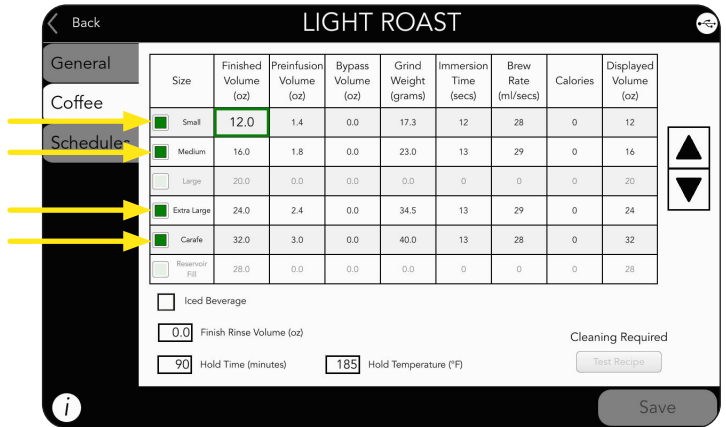


NOTE: Coffee recipes can be edited from this screen by clicking any of the numbers in the table cells.

2. For this example the Small Volume is being revised as shown by the green border.

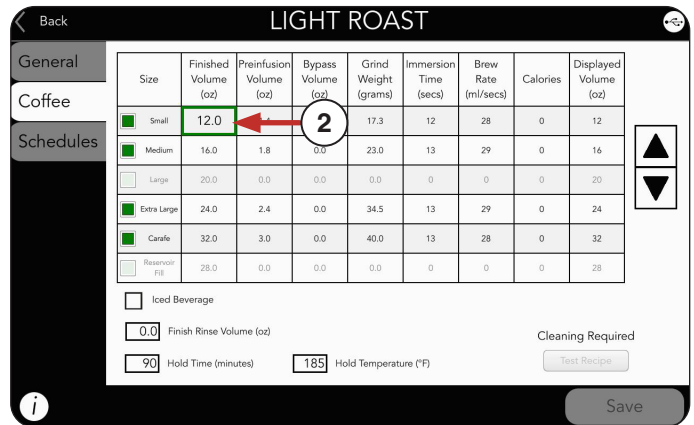

3. The arrows on the right side of the screen can increase or decrease the selected number by decimal points. Example: 8.0 to 8.1, 8.2, 8.3, etc.

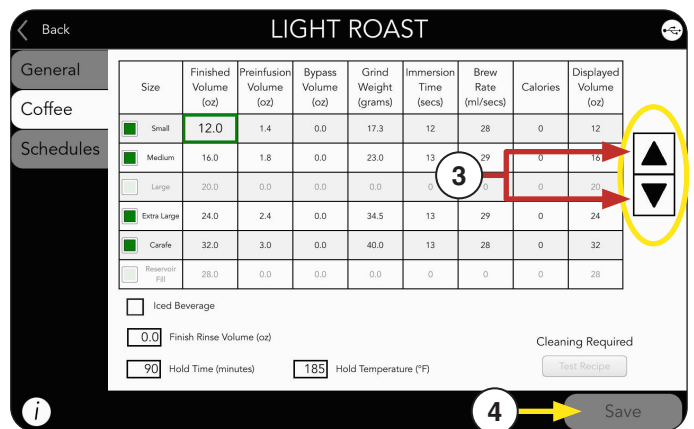

4. Press SAVE if changes are made.


SETUP MENU

Continued from previous page


SCHEDULES

1. Choose the Schedules tab to edit the recipe hold volumes for each hour/day.

NOTE: There are options available to use an existing template to edit with, create a new schedule from blank, or upload an existing schedule from a saved file using a USB stick.

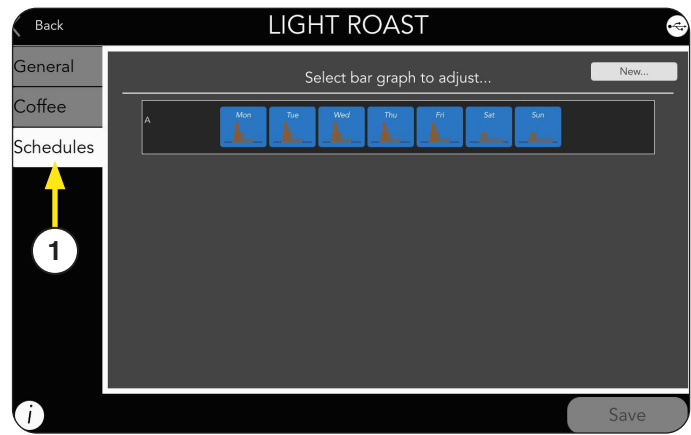


2. The Schedules Tab allows you to adjust hold volume for different times of each day. This is useful when trying to conserve energy and waste during down times as well as keep up with high volume peak times.

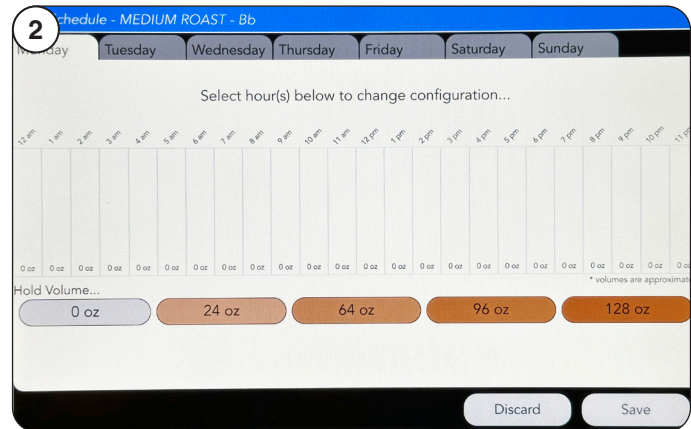

3. To adjust the hold volume, Select the hours(s) on the screen to change the configuration. Example shows 5am to 5pm selected.

4. Select another tab (day) to make further adjustments.

5. Select SAVE when finished.

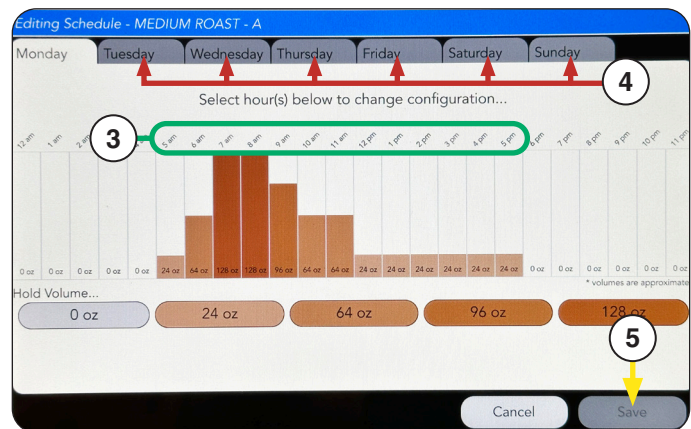


SETUP MENU

Continued from previous page


PRODUCTS

This tab will allow the operator to enable, modify, add, reset or delete products stored in the brewer.


1. Select the Products tab to make edits to any product listed.
We will use the “Light Roast” as an example.
2. Choose a product to edit.
3. Or, create a New Product.

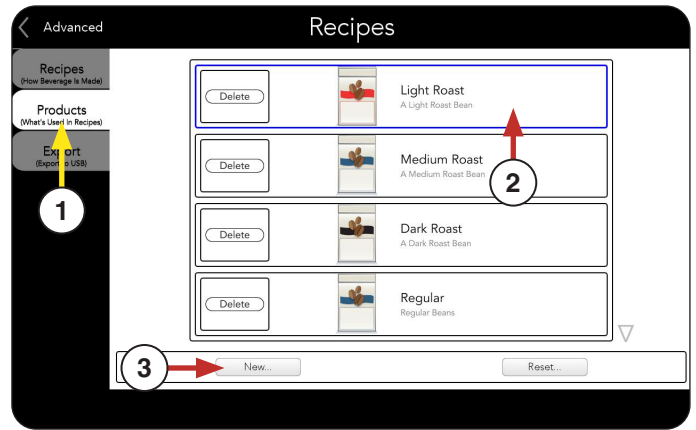

4. Next, choose the Product Name field.

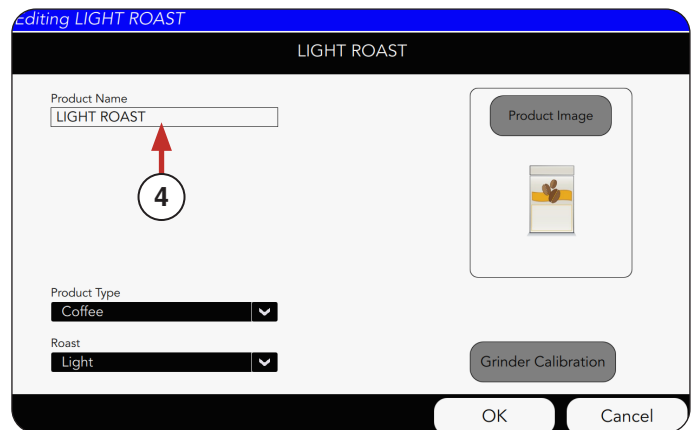


5. Type the name of your product, for example “Regular”

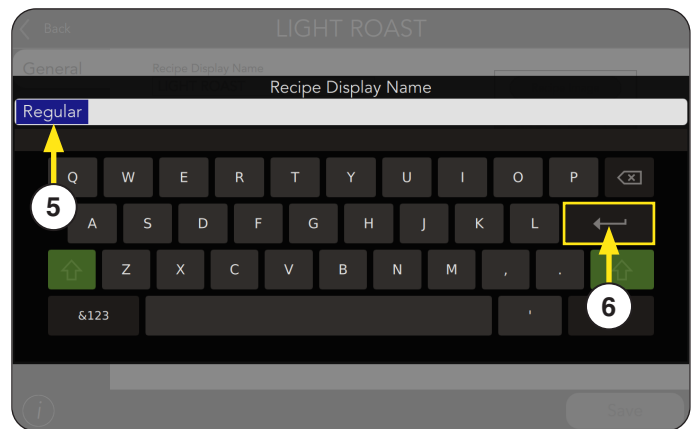

6. Press Return if change was made.

NOTE: The Product Name has been updated for this example.


7. Now, choose a Product Image, or use the existing badge.

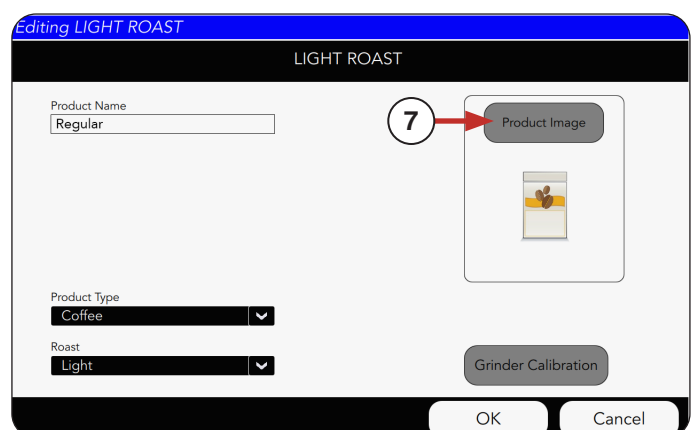

SETUP MENU

Continued from previous page


8. Next, scroll side-to-side to see the available images.
9. Press the chosen Product Image.
10. If a new image is chosen, press OK.

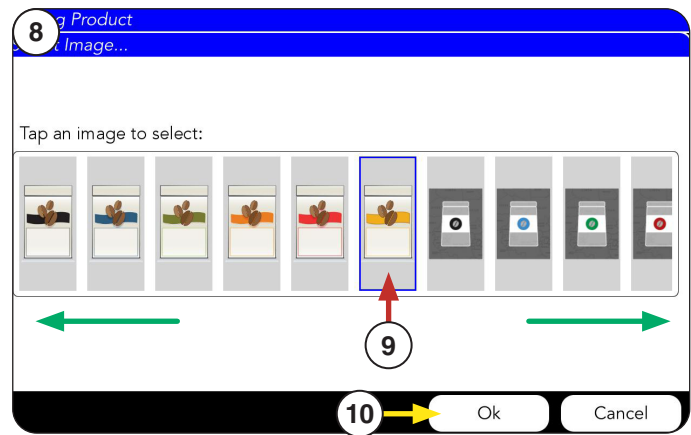

11. Press OK to complete this Product creation.

NOTE: The product will need to be calibrated before brewing.

See next page for Product Calibration.

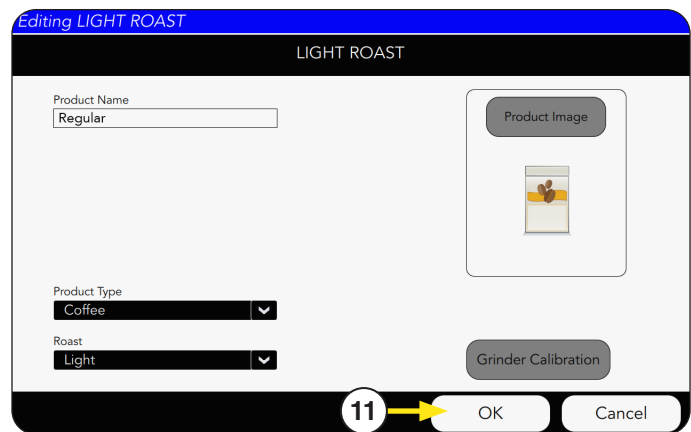


SETUP MENU

Continued from previous page

PRODUCT CALIBRATION

1. Select the Grinder Calibration button.

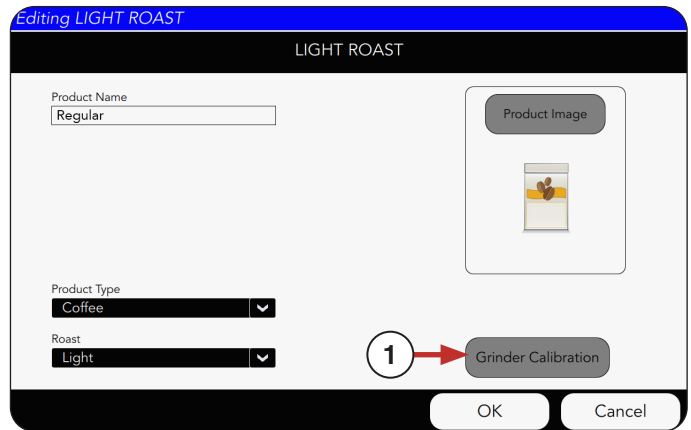


2. Choose a hopper from the tabs. The default is the left hopper.

NOTE: Choosing the hopper during calibration is simply telling the machine which grinder to turn on.

WARNING: All three hoppers must be locked in position before starting.

3. Next, press the Start button to prime the grinder with beans.

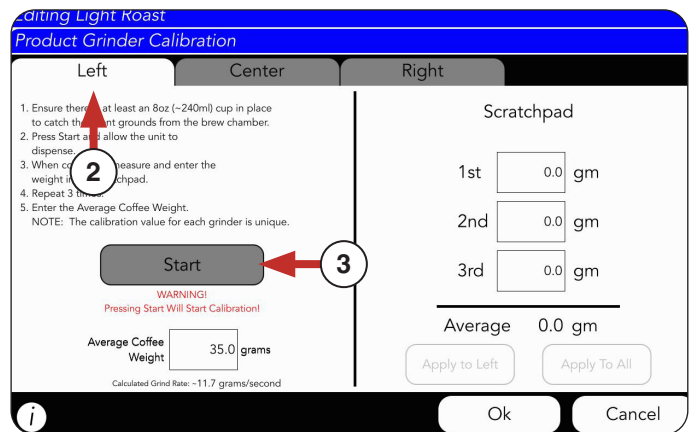


NOTE: Run two grind sequences and discard the coffee before taking a measurement.

4. Follow on-screen prompts.



5. Tare (zero) empty receiving container on a digital weigh scale.
 - a. Select Tare
 - b. Select grams.

It's time to Calibrate the grinder.

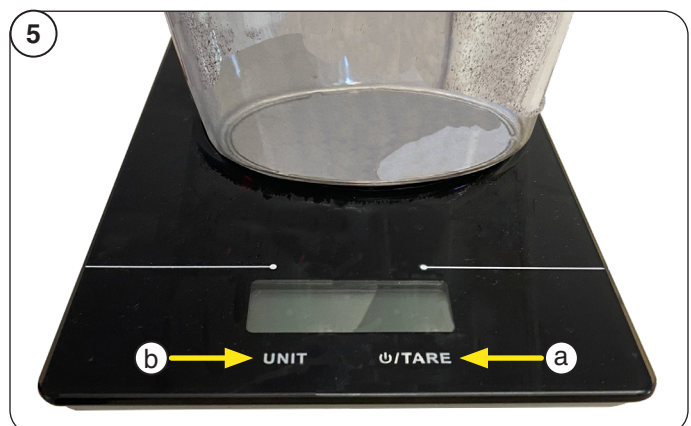


SETUP MENU

Continued from previous page


- Place the empty tared container under the Grounds Chute below the counter.

Grounds Chute opening shown below counter

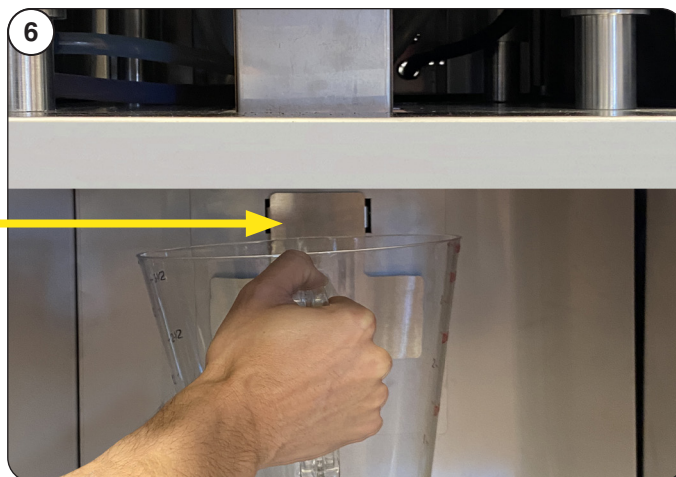

- Return to Calibration screen.

- Press START button.

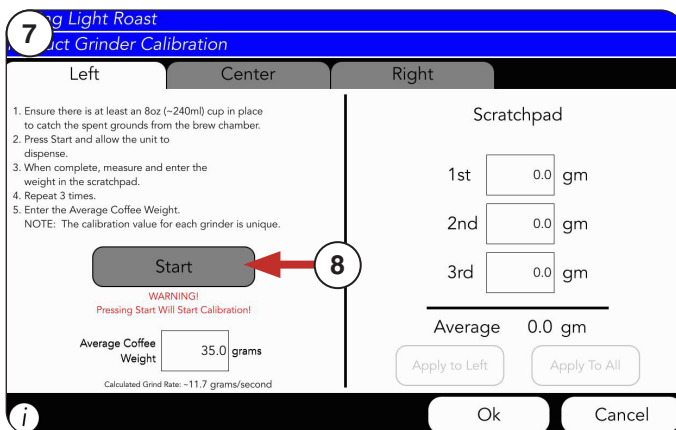


- Allow time for the grind to finish.
Once the grind is finished, take the container and place it on the digital scale.

- Weigh container.



- Then, press the 1st Field to log the weight of the coffee in the cup.

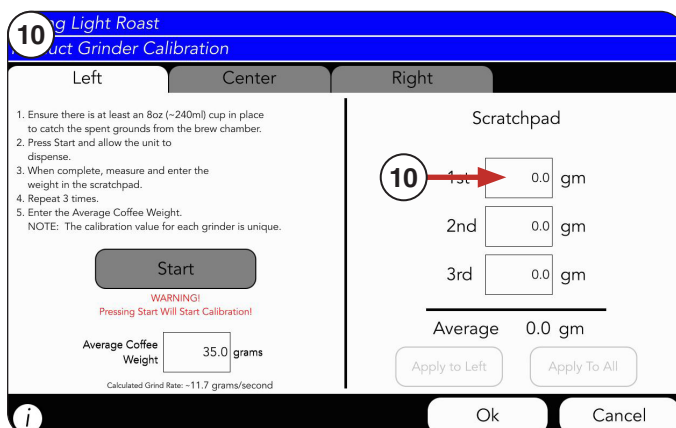


SETUP MENU

Continued from previous page

After pressing the 1st Field to log the weight of the coffee in the cup, the Input Screen will appear for you to input in these numbers.

11. Type the weight of the cup


12. Press Enter.

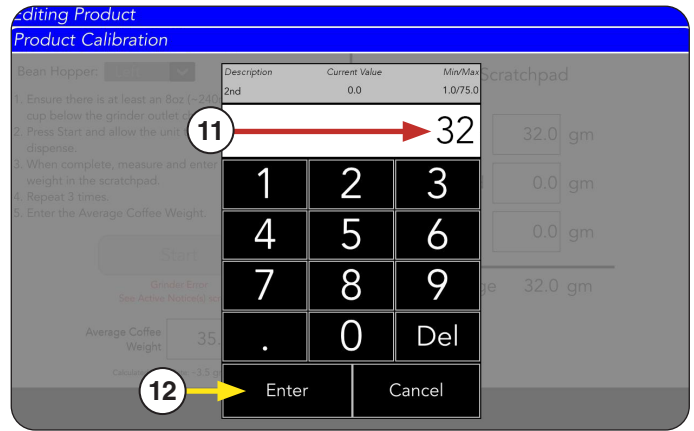


Empty the cup, then repeat steps 1 - 10 two more times to fill in all 3 weight fields.

13. Note the Average Weight of the three tests.

For this example it's 32.7 grams.

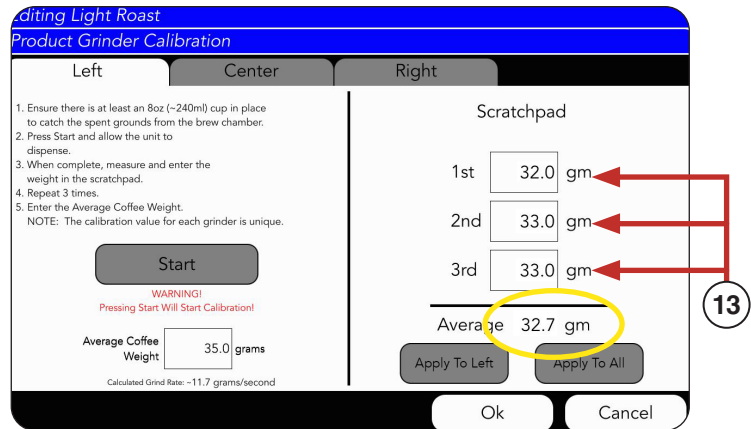


14. Press on the Average Coffee Weight field to fill in this amount or simply press Apply to Left or All hoppers.

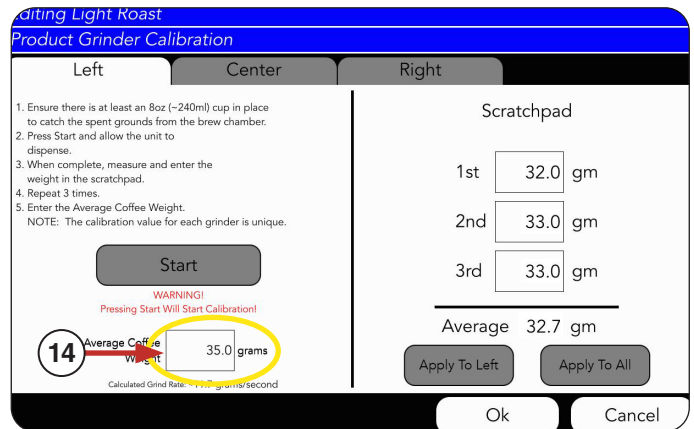

15. The input screen will appear to type these numbers.

16. Press Enter.

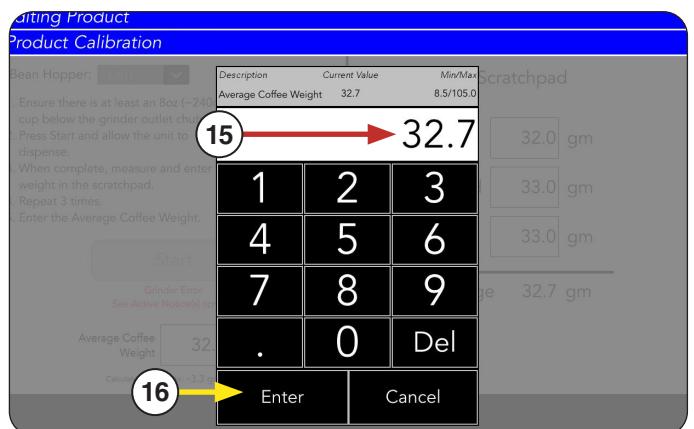

SETUP MENU



Continued from previous page

IMPORTANT: A grinder calibration for a specific product can be applied to the grinder selected (The Left grinder is the default), or applied to All.

If this step is completed and the Apply to Left Center, or Right button is selected, the recipe will need to be re-calibrated if it's moved from the specified grinder to either of the other two grinders. Or, it can be applied to All.

17. Choose to Apply To Left or Apply To All.

18. Press OK to complete Grinder Calibration.

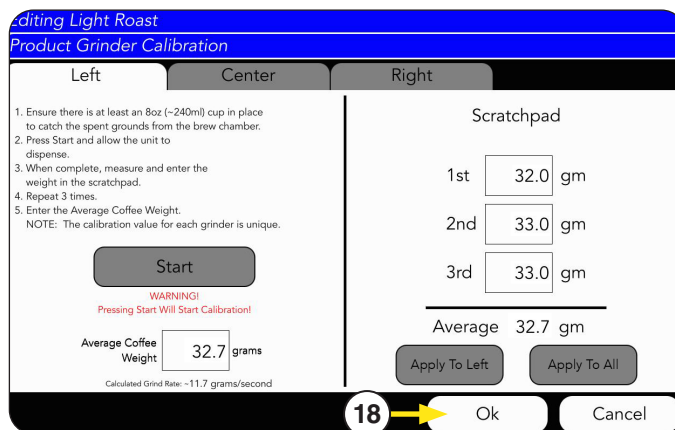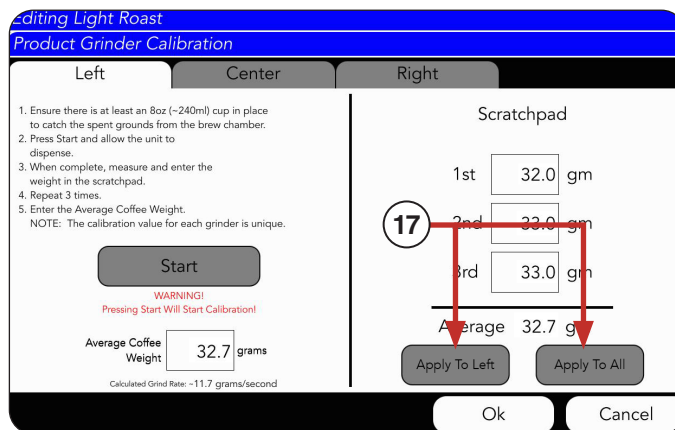


SETUP MENU

Product Setup




How to Access:

1. **Press and hold** the BUNN logo for a few seconds until the Programming Menu screen appears on the display.
2. Select the Advanced Setup icon.
3. Enter passcode **6601**.
4. Select Product Setup icon.

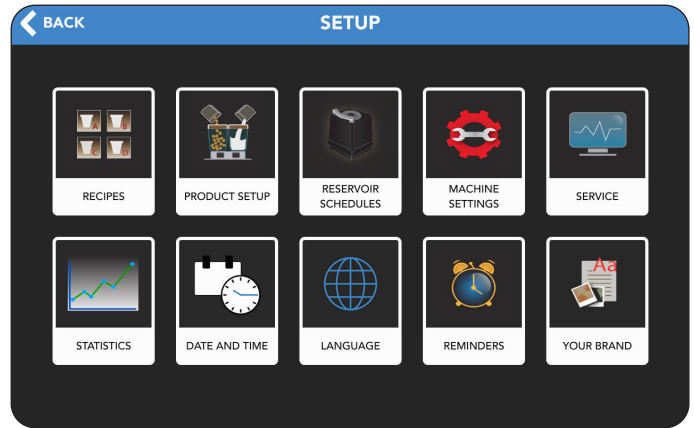

The Product Setup screen contains multiple pages that can be accessed by selecting a tab on the left of the screen and is used to change blends, assign hoppers, and select what beverages will be available:

- **Beverages Offered:** This tab will allow an operator to select what beverages will be made available to the consumer. The enabled products will be displayed on the main screen. The reservoir schedule can also be assigned from a template using this screen.
- **Bean Hoppers:** This tab will allow the operator to set what type of blend is in each hopper by swiping up or down to navigate through the various choices. The blend needs to be assigned to a hopper in order for the beverage to be displayed on the main screen. The calibrate button can also be pressed from this screen to perform a product calibration.
- **Carafe:** This tab will allow the operator to use a higher capacity container; to name it and to specify the quantity that can be dispensed into it.

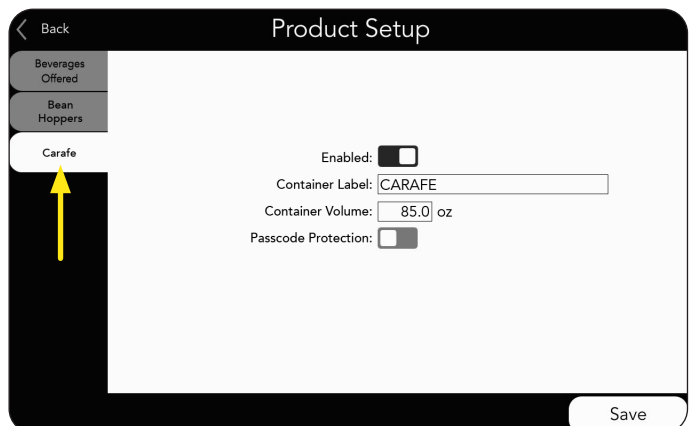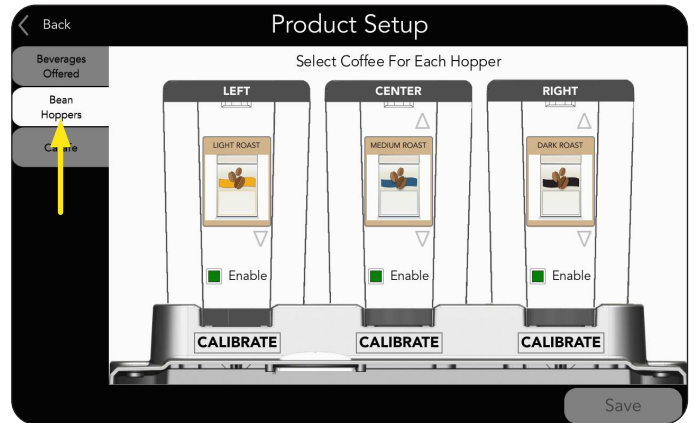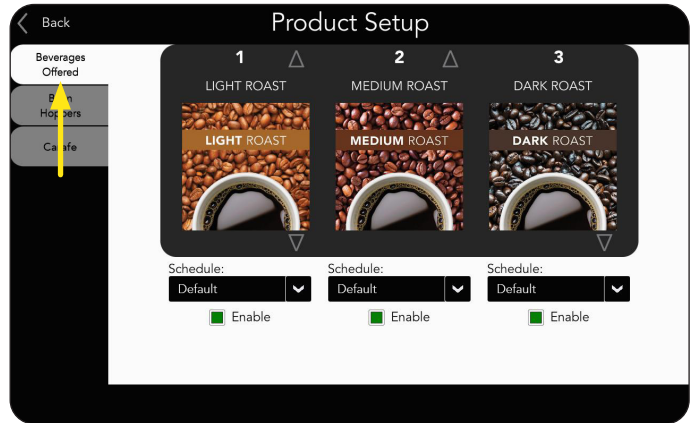



SETUP MENU

Continued from previous page

BEVERAGES OFFERED

This tab will allow an operator to select what beverages will be made available to the consumer. The enabled products will be displayed on the main screen. The reservoir schedule can also be assigned from a template using this screen.



1. Select the Beverages Offered tab to make edits to what is available to the customer on the home screen.
3. Use the Up and Down arrows to change out recipes available for dispense.
4. Choose the Enable boxes for the beverages you want available to enable or disable.
5. Use the Drop Down box to assign a reservoir schedule (saved from templates) to the beverage.
6. Press SAVE if changes are made.

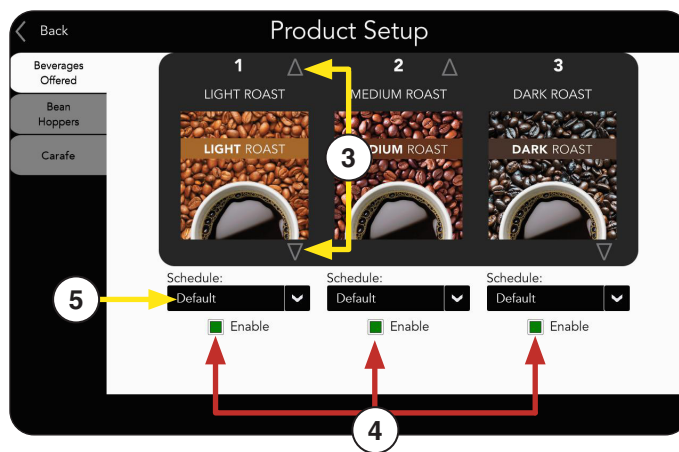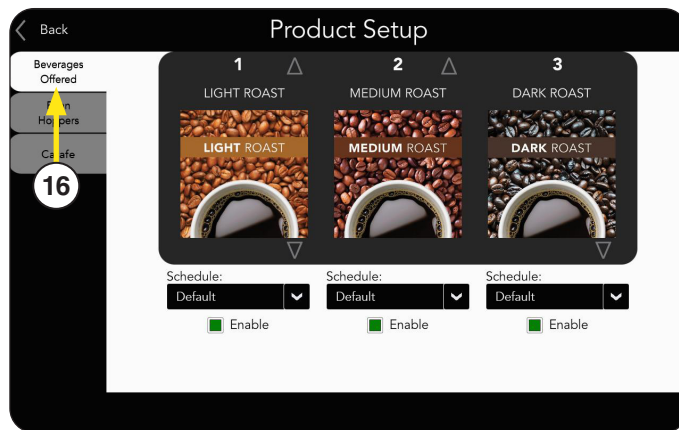

BEAN HOPPERS

This tab will allow the operator to set what type of blend is in each hopper by swiping up or down to navigate through the various choices. The blend needs to be assigned to a hopper in order for the beverage to be displayed on the main screen.

1. Select the Bean Hoppers tab to assign which Product goes in which hopper.
2. Press the Enable box to select which hopper to use.
3. After Enabling a hopper, you can use the up and down arrows to select an icon for the Product in that hopper.
4. Press Save when finished.

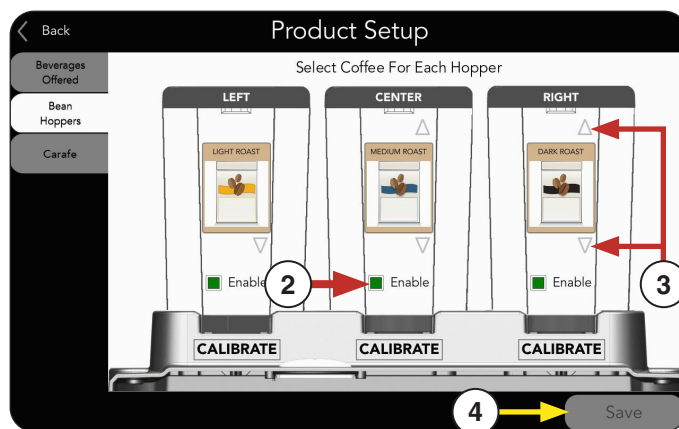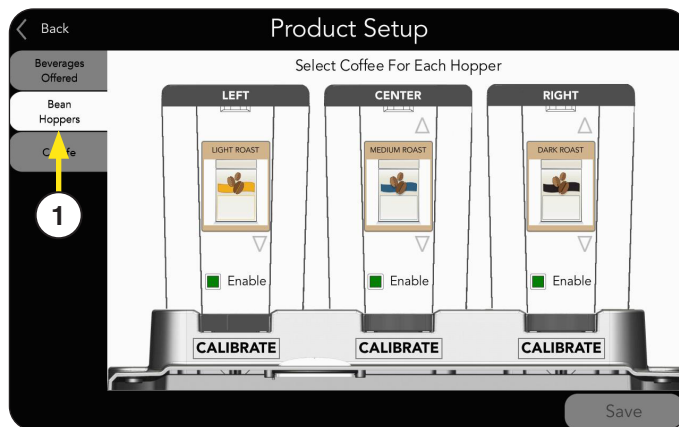



SETUP MENU

Continued from previous page

CARAFE

This tab will allow the operator to use a higher capacity container; to name it and to specify the quantity that can be dispensed into it.

1. Select the Carafe tab to make edits to what is available to the customer on the home screen.
2. Slide the button over to enable..
3. Choose the Container Label text box to name the container.
4. Choose the Container Volume text box to give the capacity of the container.
5. Select Save if changes were made.

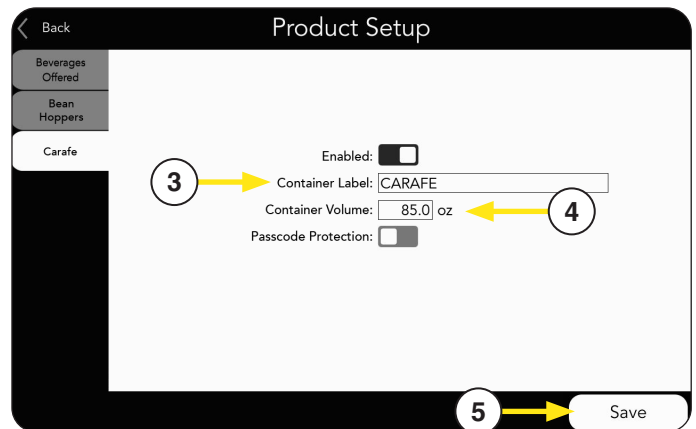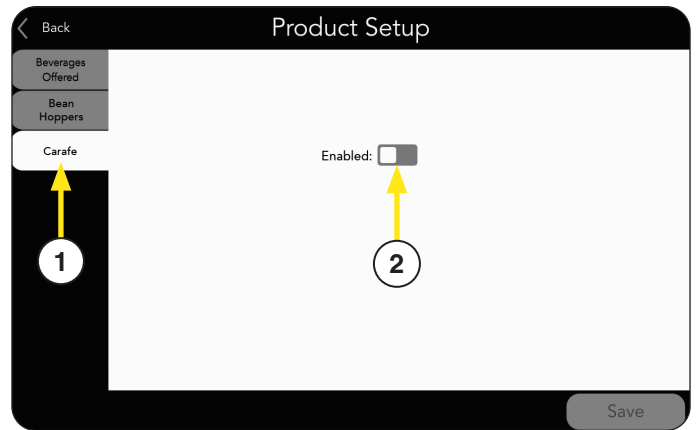


SETUP MENU

Reservoir Schedule


How to Access:

1. **Press and hold** the BUNN logo for a few seconds until the Programming Menu screen appears on the display.
2. Select the Advanced Setup icon.
3. Enter passcode **6601**.
4. Select Reservoir Schedule icon.

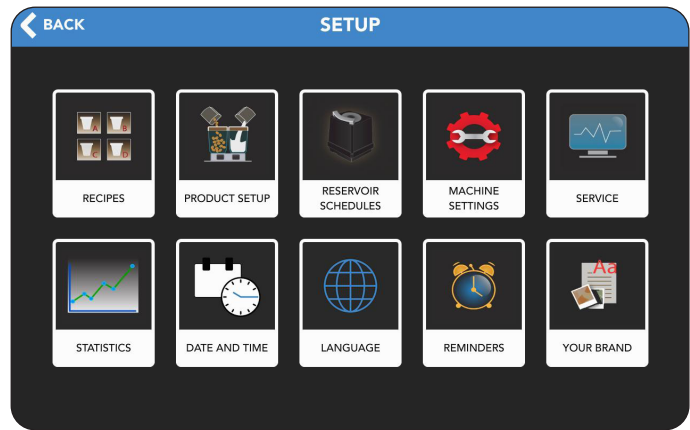


The Reservoir Schedule screen contains pages that can be accessed by selecting a tab on the left of the screen and is used to view or edit reservoir schedules in relation to hold volume.

- **Active Assignments:** This tab will allow the operator to select a bar graph to edit reservoir schedules or override to a specific hold volume.

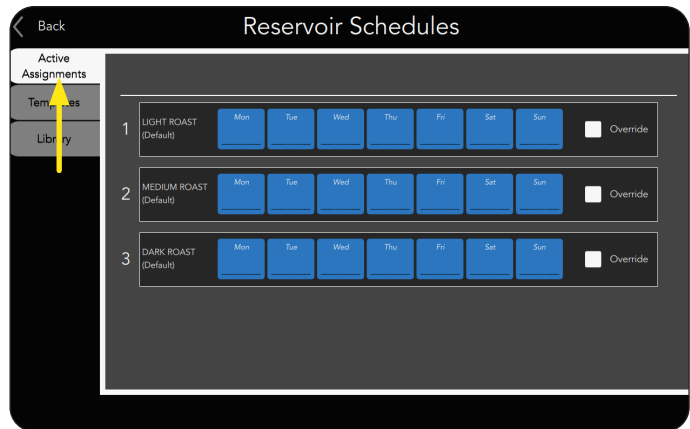

- **Templates:** This tab will allow the operator to use pre-created default templates.

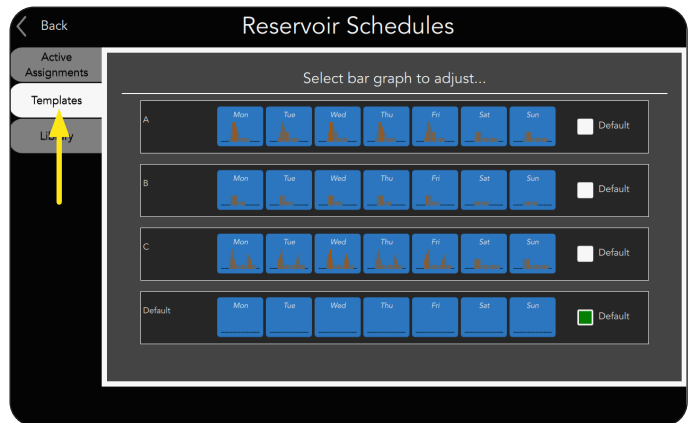

- **Library:** This tab will allow the operator to use saved templates for each day of the week.




SETUP MENU

Continued from previous page

OVERRIDE RESERVOIR SCHEDULE



1. Select the Active Assignments tab to override active reservoir schedules to a specific hold volume.
2. Select a check box next to the active reservoir schedule to override.
3. Select the hold volume that will override the active reservoir schedule.

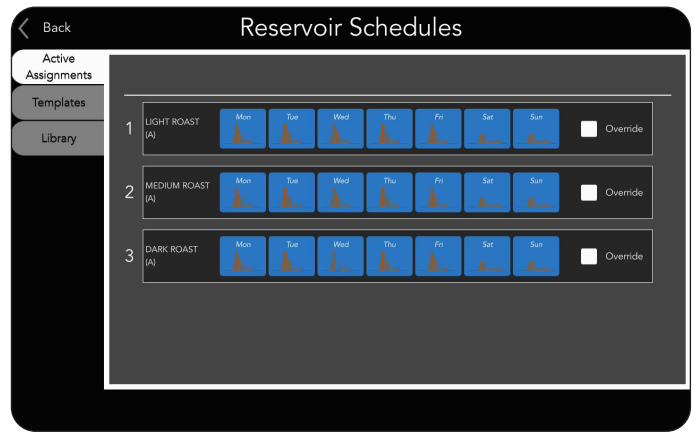

Machine Settings


How to Access:

1. **Press and hold** the BUNN logo for a few seconds until the Programming Menu screen appears on the display.
2. Select the Advanced Setup icon.
3. Enter passcode **6601**.
4. Select Machine Settings icon.

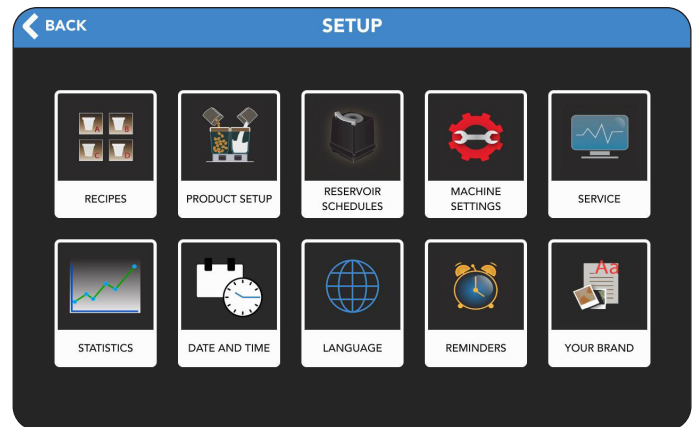

TEMPERATURE ADJUSTMENT


1. Select the Temperature tab to adjust the Brew Tank Temperature along with other settings related to brewing temperature:
 - a. When Brew Lockout Enabled is selected, it will not let the machine dispense coffee until the ready temperature is met.
 - b. The Brew Tank Temperature default is 200°F.
 - c. The Ready Temperature is the minimum temperature that must be reached to make beverages.

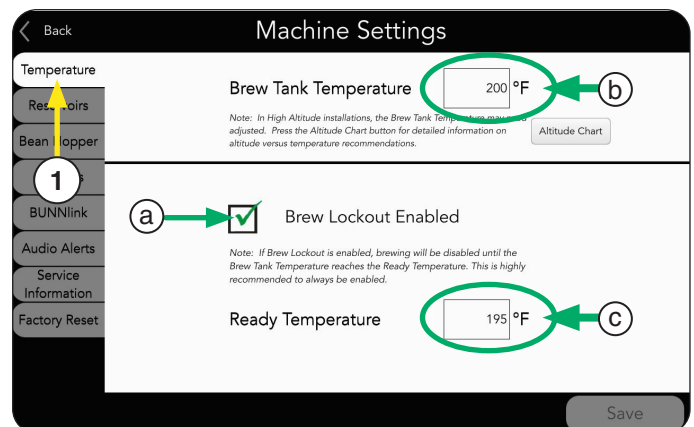

SETUP MENU

Continued from previous page

- If the temperature needs to be adjusted for high altitude, press the Altitude Chart button.

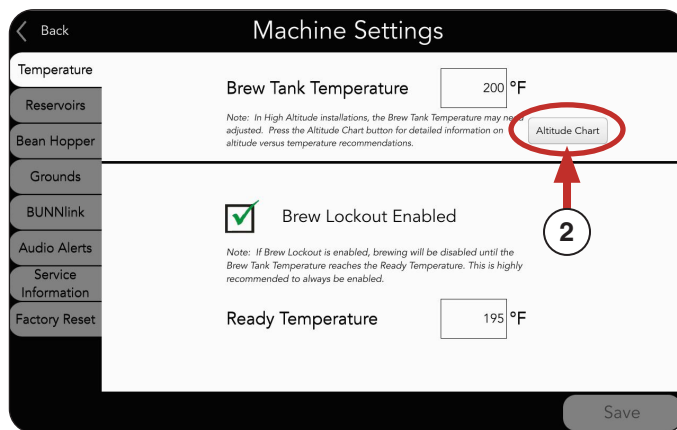

- On the chart, find your current Altitude, then move to the right to find the suggested tank temperature setting.

The chart will scroll down for more altitude settings.


Press OK to return to the temperature screen.

Altitude (Feet)	Boiling point of Water		Recommended water temperature	
	°F	°C	°F	°C
-1000	213.8	101.0	200	93.3
-500	212.9	100.5	200	93.3
0	212.0	100.0	200	93.3
500	211.1	99.5	200	93.3
1000	210.2	99.0	200	93.3
1500	209.3	98.5	200	93.3
2000	208.4	98.0	200	93.3
2500	207.4	97.4	200	93.3
3000	206.5	96.9	199	92.8
3500	205.6	96.4	198	92.2

Ok

- Touch the Temperature box to edit the temperature setting.

- Press Enter to accept if change was made.

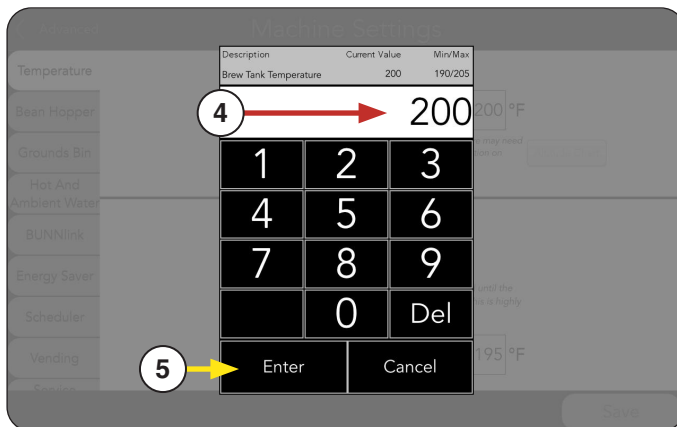


- If the tank temperature falls below the ready temperature setting, brewing will be disabled until the ready temperature is reached.

Press the Ready Temperature box to alter the ready temperature.

- Press in the check box to remove the green check mark, and disable Brew Lockout.

NOTE: Coffee brewing can be performed regardless of tank temperature.

- If any changes are made to the Temperature screen, press Save to confirm.

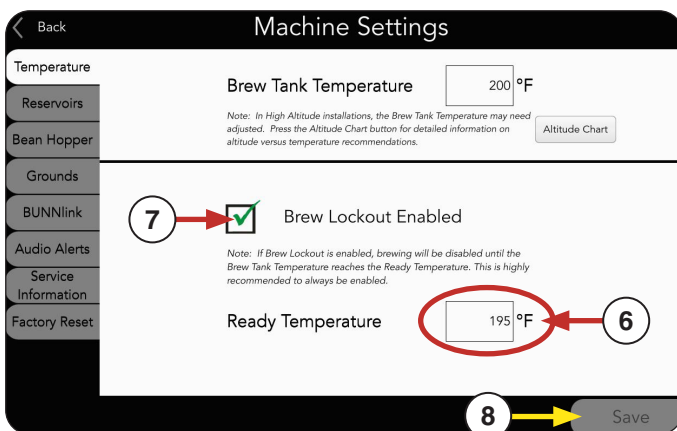

SETUP MENU


Continued from previous page

RESERVOIRS

Dispense Rate Adjustment

Use the Dispense Rate slider to adjust the ounces per second.


Example: A higher dispense rate of 2.25 ounces per second will decrease the amount of time it takes to fill a cup.

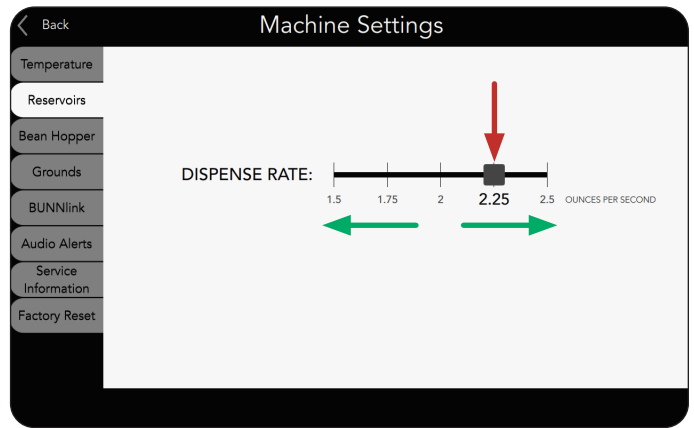

BEAN HOPPER


Hoppers have sensors which will indicate when the hopper is low on beans.

1. Select the Bean Hopper tab to adjust the sensor sensitivity or enable/disable sensors individually.

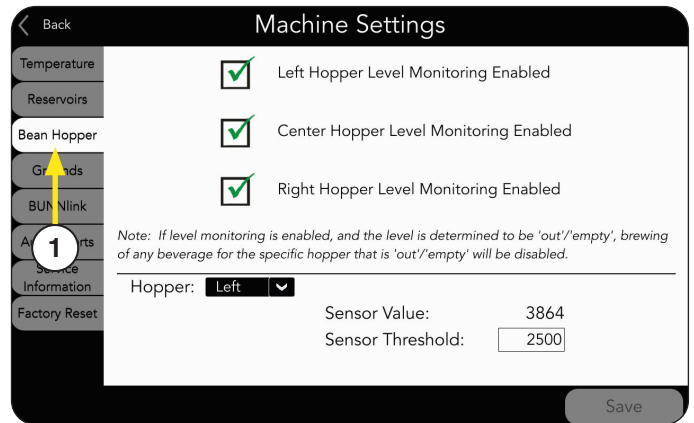

2. To enable/disable Bean Hopper level monitoring, press in the check box for any or all hoppers.
3. If any changes have been made, press Save to confirm.

NOTE: The sensor threshold can be adjusted for sensitivity. Higher number = more sensitive, Lower number = less sensitive.


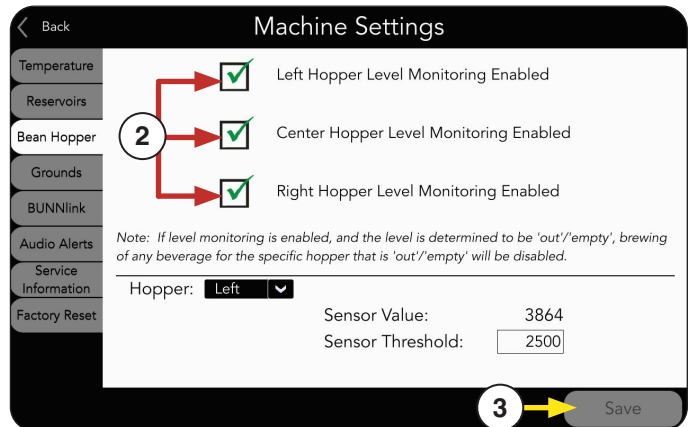


SETUP MENU

Continued from previous page

GROUNDNS


1. Select the Grounds tab to edit or enable/disable the monitoring system for waste. The grounds bin level is monitored by measuring the grinder on time. When the machine has determined that enough coffee has been used, a grounds bin full message will be displayed.
2. If the grounds bucket is too full, sliding the button to the left will reduce the amount of grounds in the bucket before indicating full. If there is extra room in the bucket at the full signal, sliding the button to the right will allow more grounds before indicating full.
3. Press the button next to Monitoring Enabled to disable grounds bin monitoring.
4. If any changes are made, press Save to confirm.

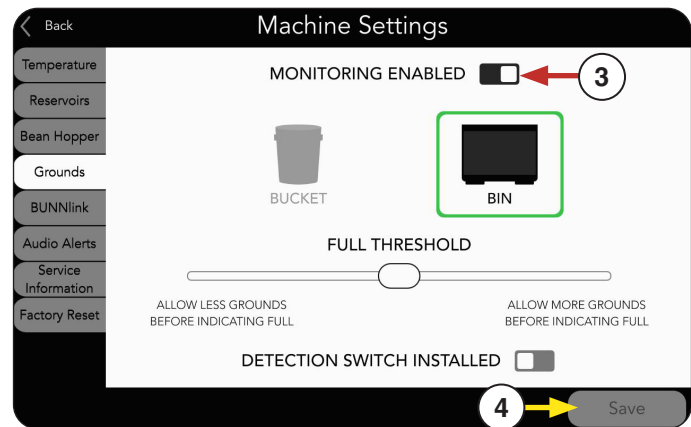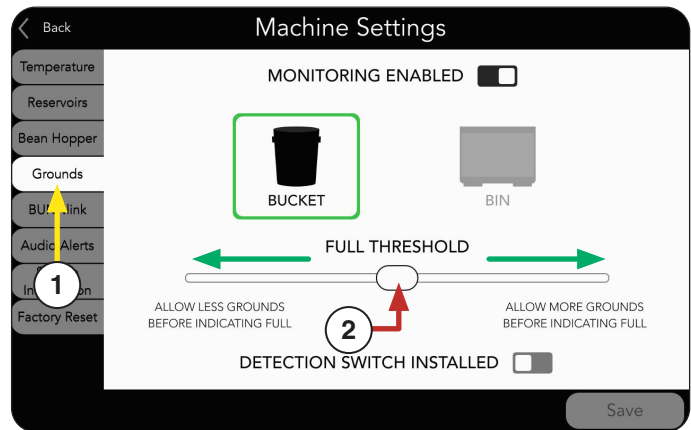

BUNNLINK®

If BUNNlink hardware has been installed in the machine, this screen will indicate that it is active, and provide other data. There is no editable information on this screen.

NOTE: BUNNlink has to be Enabled at Setup after it is installed.

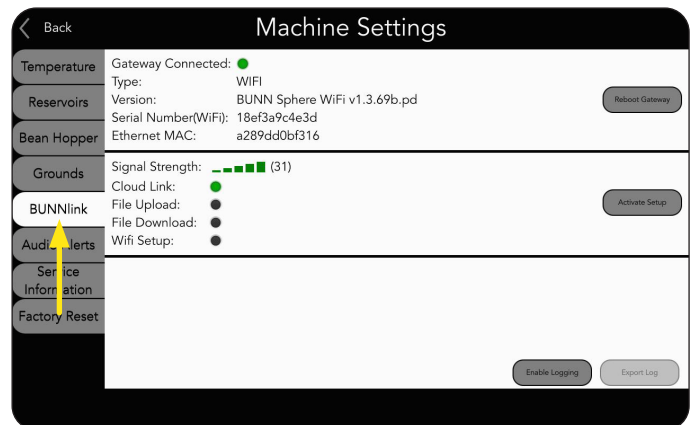


AUDIO ALERTS

If enabled, the machine will beep when a new Notice gets activated.

EXAMPLE: bean hopper empty, lower door open, reservoir cabinet swing arm up, etc).

Slide the button over to enable.

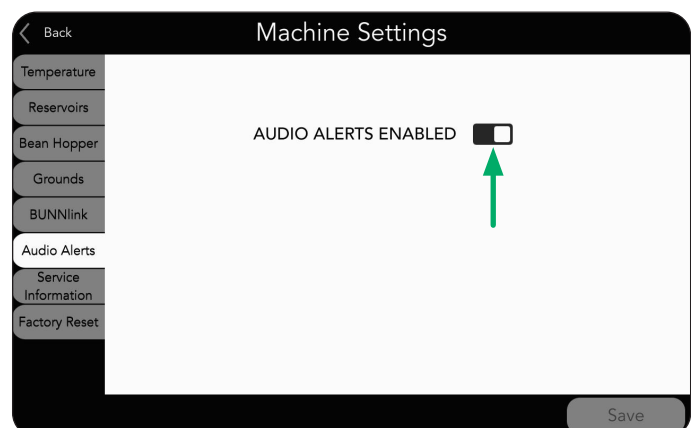


SETUP MENU

Continued from previous page

SERVICE INFORMATION


1. In the event service may be required, information for contacting the appropriate service provider may be entered on this screen for ready access.
2. If any changes to the screen have been made, press Save to confirm.

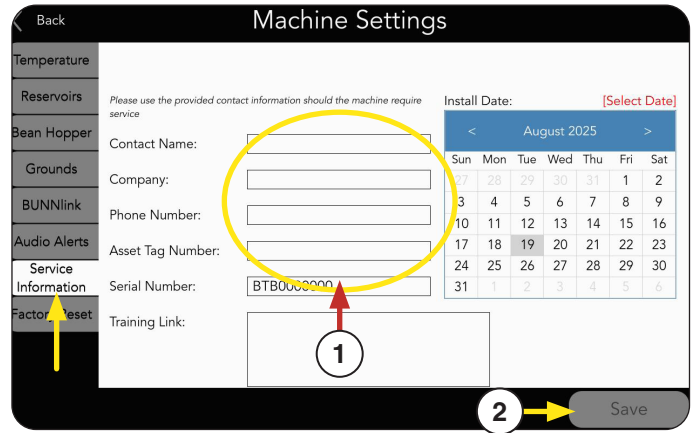


FACTORY RESET

1. Pressing the red button will cause stored values to be restored to the default setting the machine had when it shipped from the factory.

Caution! This will remove custom setting and images, and can NOT be undone!

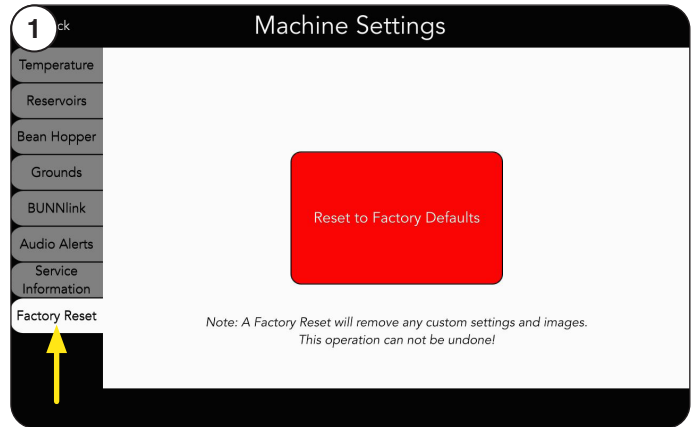

2. A warning screen will appear for a second opportunity to confirm that the Factory Reset should proceed.


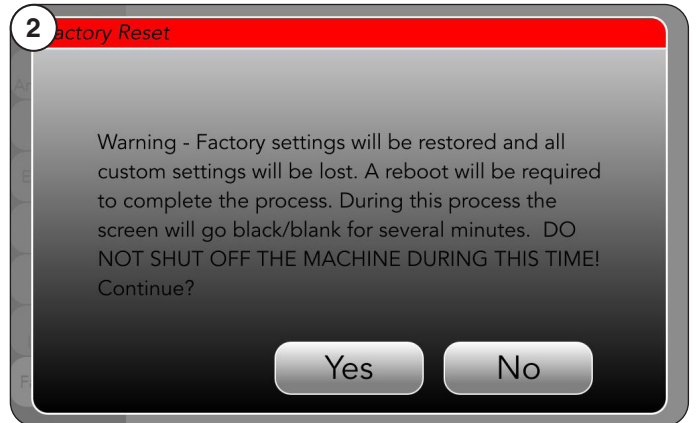


SETUP MENU


Service

How to Access:

1. **Press and hold** the BUNN logo for a few seconds until the Programming Menu screen appears on the display.
2. Select the Advanced Setup icon.
3. If you are authorized to service the machine; contact BUNN for the password.
4. Select Service icon.

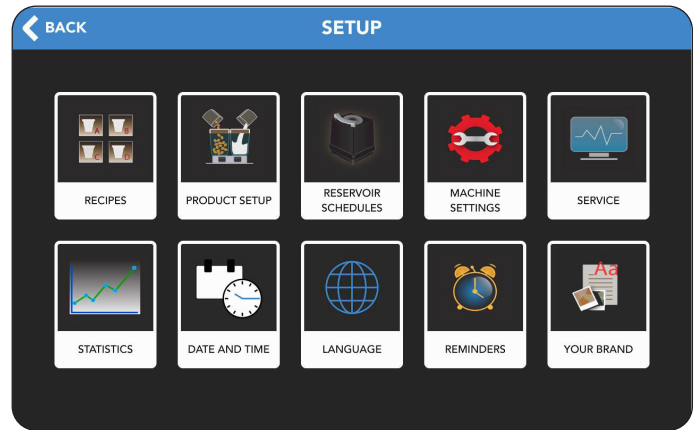


Example of initial Service screen and subject information available by selecting each of the subject tabs on the left.

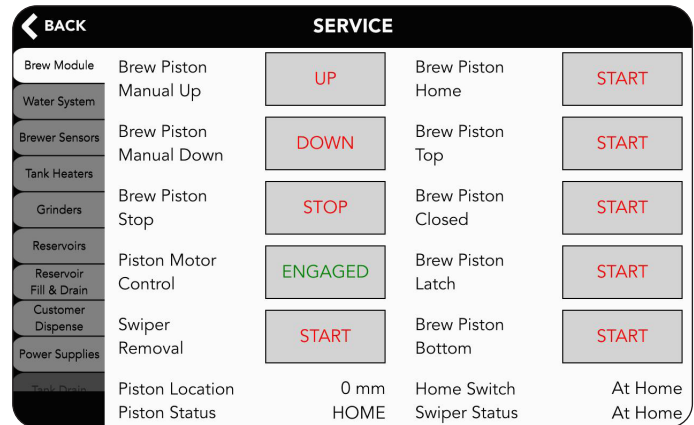

Statistics


How to Access:

1. **Press and hold** the BUNN logo for a few seconds until the Programming Menu screen appears on the display.
2. Select the Advanced Setup icon.
3. Enter passcode **6601**.
4. Select Statistics icon.

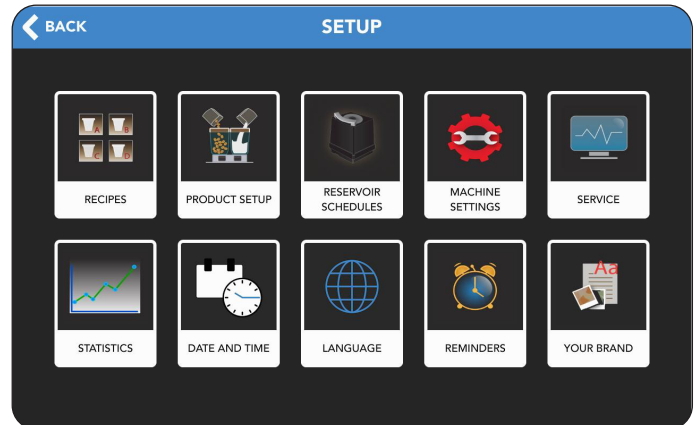

The Statistics Menu has data for the items listed in the left tabs:

- **Cup Count:** Data of current and lifetime cups dispensed by size.
- **Product:** Data of how much product (coffee) is sold by weight.
- **Machine:** Data of current and lifetime usage of machine including grinding, water, power, etc.
- **Care and Cleaning:** Data of current and lifetime completed cleanings, cleaner usage and times.
- **Reports:** Daily Totals, Hourly Beverage and Beverage Database reports can be selected and exported.

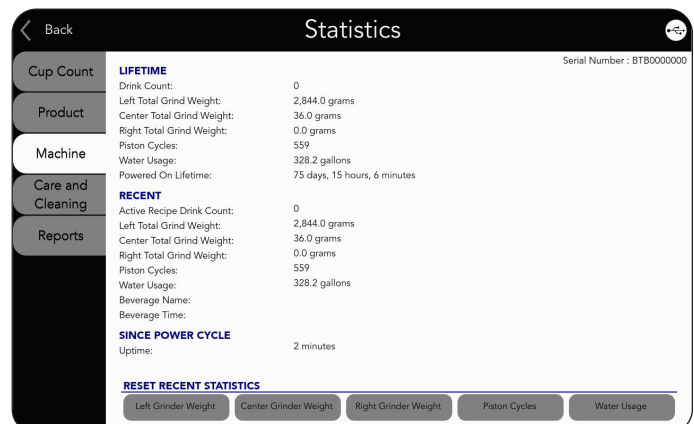



SETUP MENU

Continued from previous page

Date and Time


How to Access:

1. **Press and hold** the BUNN logo for a few seconds until the Programming Menu screen appears on the display.
2. Select the Advanced Setup icon.
3. Enter passcode **6601**.
4. Select Date and Time icon.

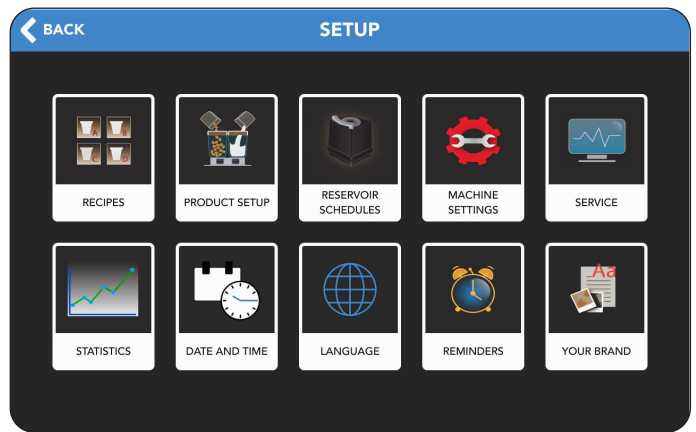


How to Make Adjustments

- **Date:** Sets the day of the month. Use the < > to scroll through the months, and press the date.
- **Time:** Using the + and – buttons, set the correct time format and clock type.

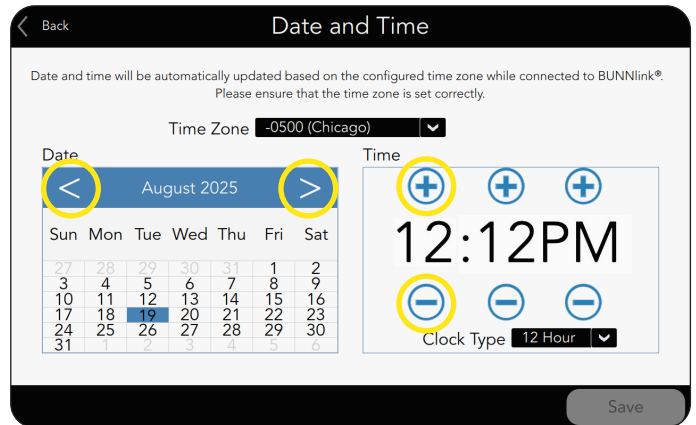

NOTE: BUNNlink connected machines need to have the correct Time Zone selected for their area to have automatic functions work properly.


NOTE: Use the Drop Down menu to select the Time Zone the machine is operating in.

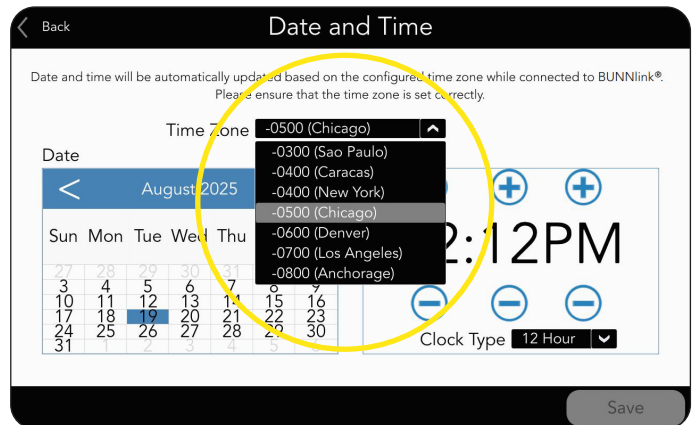

Languages

How to Access:

1. **Press and hold** the BUNN logo for a few seconds until the Programming Menu screen appears on the display.
2. Select the Advanced Setup icon.
3. Enter passcode **6601**.
4. Select Languages icon.

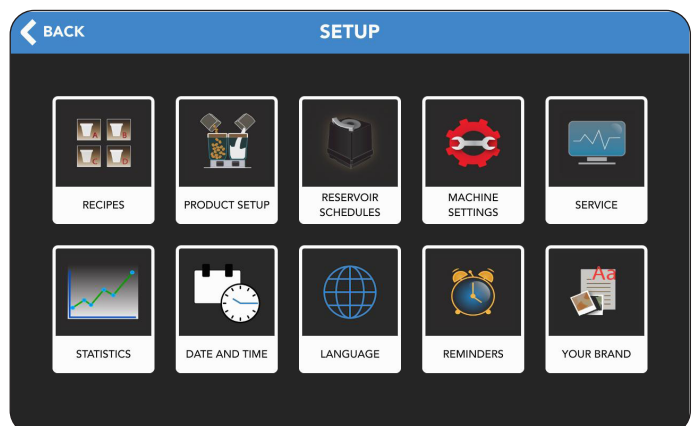


SETUP MENU

Continued from previous page


NOTE: English is the default language.

NOTE: Sliding the toggle switch to the right will give access to more languages.

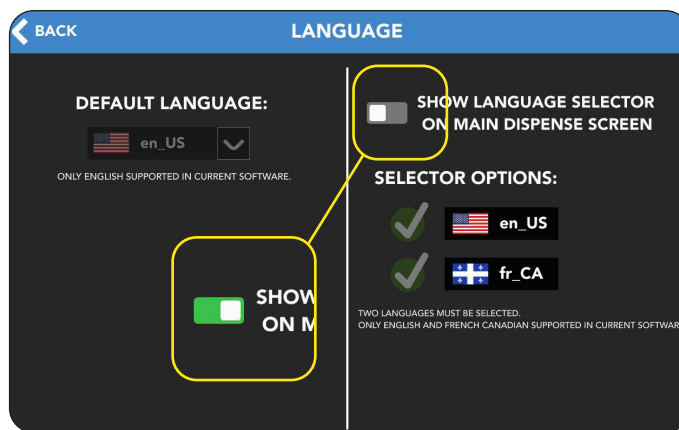

NOTE: Available languages can be changed using the drop down menu in the upper left corner of the Home screen.


Example: Text is now show in French (Canadian).

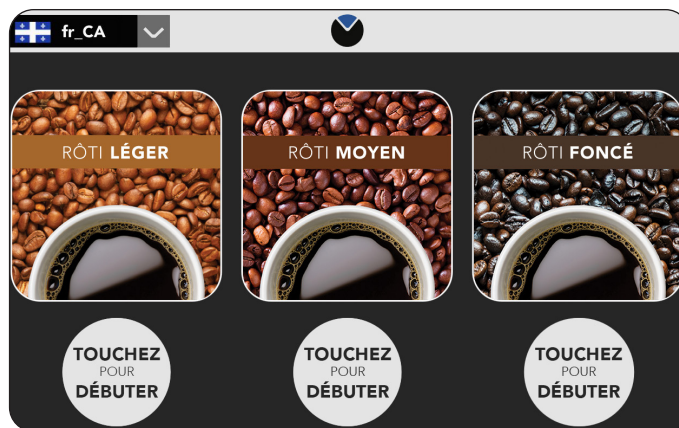

Reminders

How to Access:

1. **Press and hold** the BUNN logo for a few seconds until the Programming Menu screen appears on the display.
2. Select the Advanced Setup icon.
3. Enter passcode **6601**.
4. Select Reminders icon.

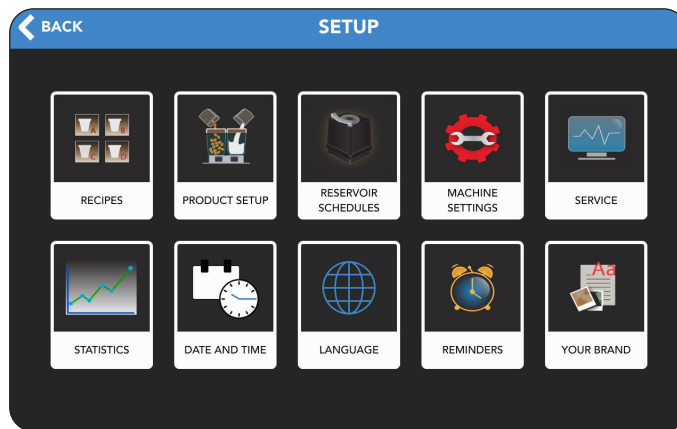


The Reminders screens can be accessed by selecting a tab on the left of the screen and is used to view or edit cleaning, preventive maintenance and water filter reminders.

CLEANING

When enabled, the machine will prompt the user to perform a Cleaning Cycle, on the day and time selected on the screen.

1. Select Cleaning tab.

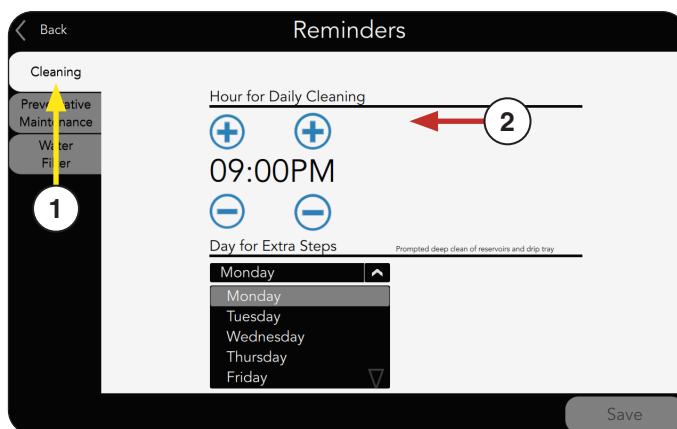

SETUP MENU

Continued from previous page


- Use the drop down menu to select the preferred Day of the Week to clean.

NOTE: The default DAY and TIME for cleaning from the factory is Monday at 9:00 pm.

- Next, press the **+** and **-** symbols to change the Time, then AM or PM.

NOTE: The default time is 9:00 PM.


- Press SAVE if changes are made.

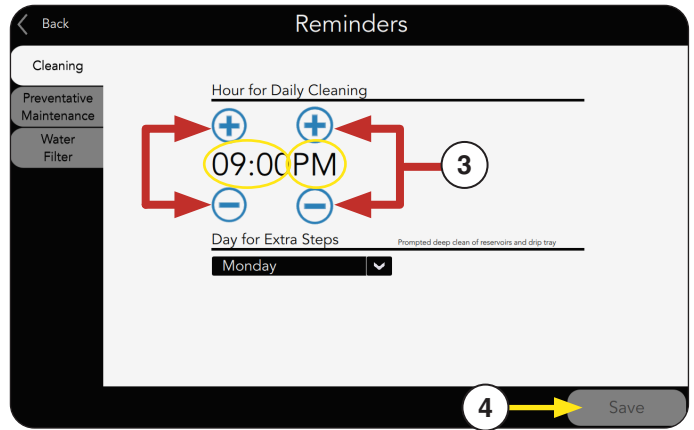

PREVENTIVE MAINTENANCE


When enabled, the machine will prompt the user to perform preventive maintenance work, at the day and time selected on the screen.

- Select Preventive Maintenance tab.

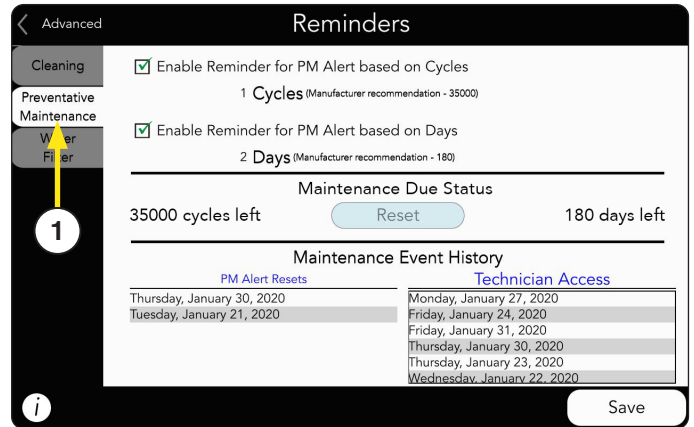


- Enable Reminder for PM Alert based on Cycles is checked as a default.

- Enable Reminder for PM Alert based on Days is checked as a default.

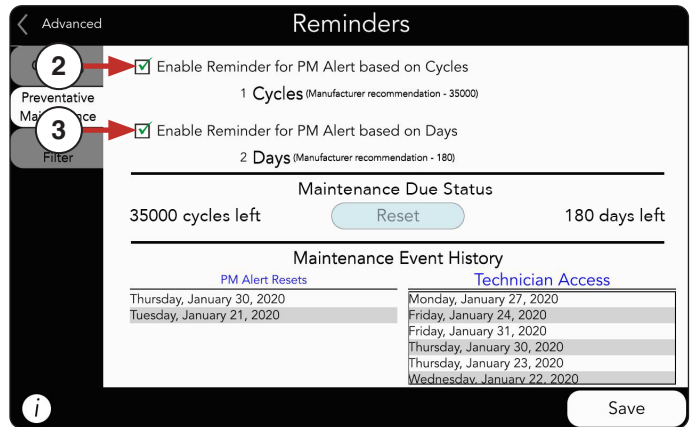


- If recommended PM Cycles or Days are running out, the screen will show countdown(s) in red.

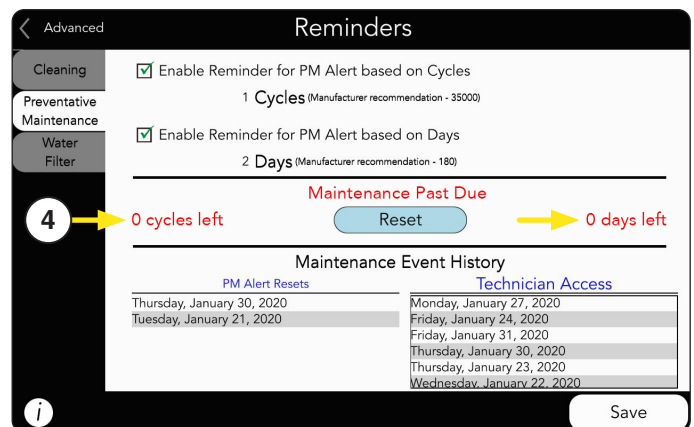

SETUP MENU

Continued from previous page


- When PM service is completed, press the Reset button.
- Press SAVE if changes are made.

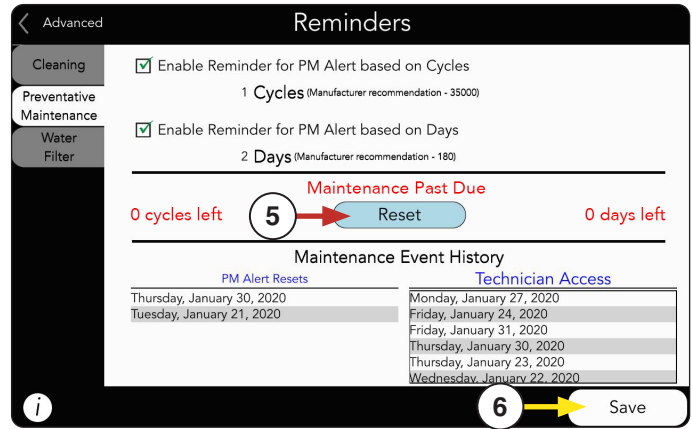



WATER FILTERS

When enabled, the machine will prompt the user to replace the water filter, at the day and time selected on the screen.

- Select Water Filter tab.
- Enable Reminder for Water Filter Alert based on Cups is checked as a default.
- Enable Reminder for Water Filter Alert based on Days is checked as a default.
- If recommended Cups or Days are running out, the screen will show countdown(s) in red.

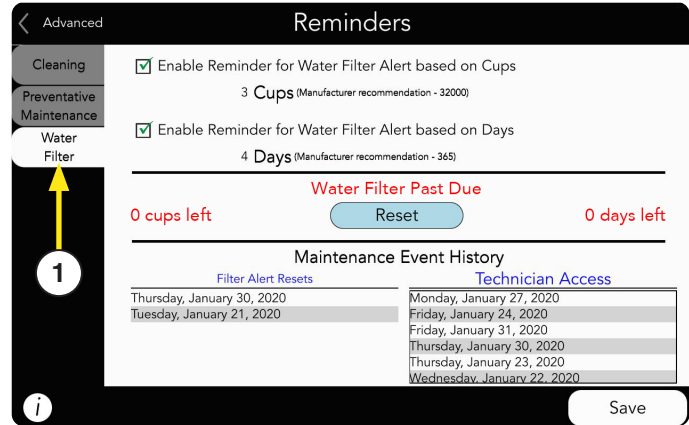

- After a new Water Filter is installed, press the Reset button.
- Press SAVE if changes are made.

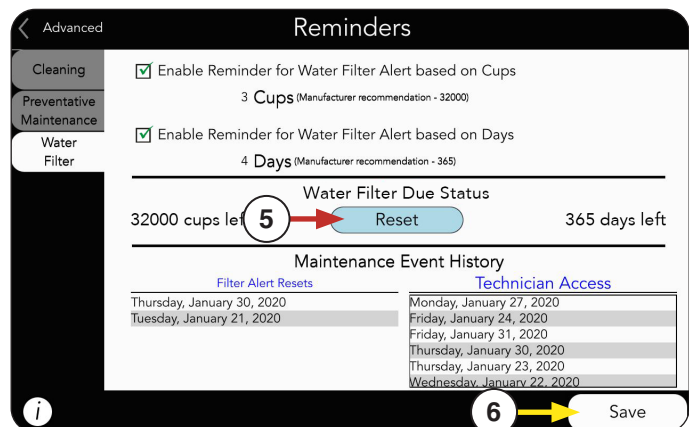
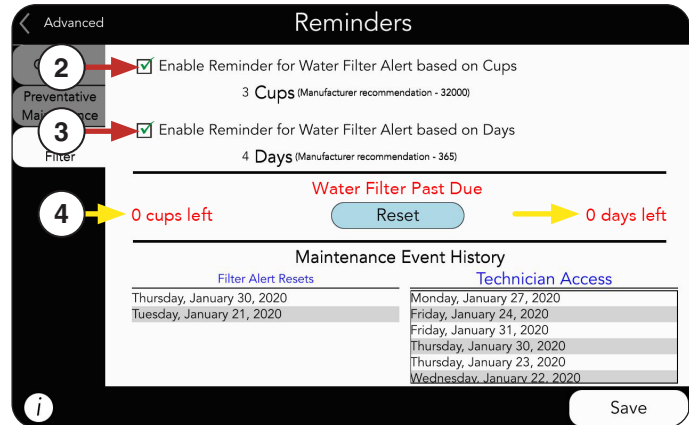


SETUP MENU

Your Brand

How to Access:


1. **Press and hold** the BUNN logo for a few seconds until the Programming Menu screen appears on the display.
2. Select the Advanced Setup icon.
3. Enter passcode **6601**.
4. Select Your Brand icon.

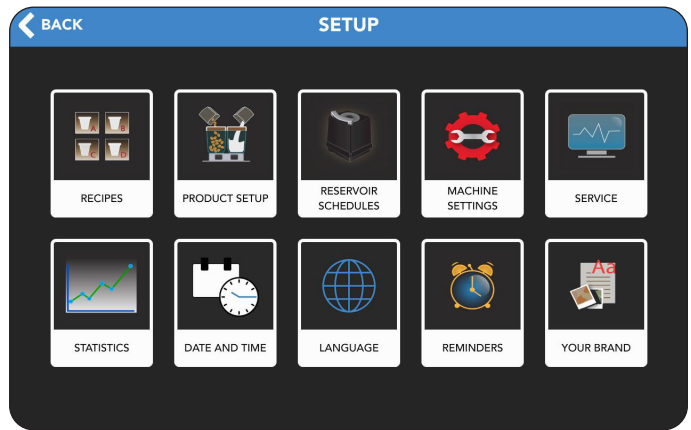

The Your Brand screens can be accessed by selecting a tab on the left of the screen and contains customization options for the machine.

DISPENSE SCREEN

When enabled, the logo bar will change color when Notices are active.

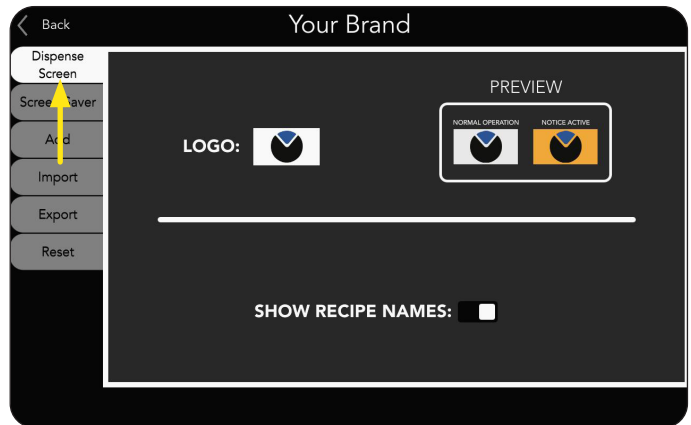

SCREEN SAVER


When enabled, the screensaver can be adjusted:

1. Select Screensaver tab.
2. Check Screen Saver Enable box.



Show Prompt Button

- a. Select Show Prompt Button box.
- b. Select Prompt Button to edit text.
- c. Select Save.

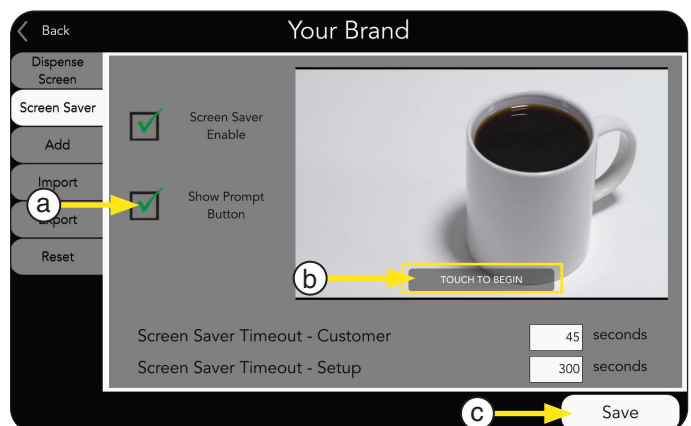

SETUP MENU


Continued from previous page

Edit Screen Saver Timeout


Select either of the Screen Saver Timeout fields.

- Customer field edits seconds after customer dispenses beverage.
- Setup field edits seconds after machine, while in setup mode.

1. Select field you want to edit..

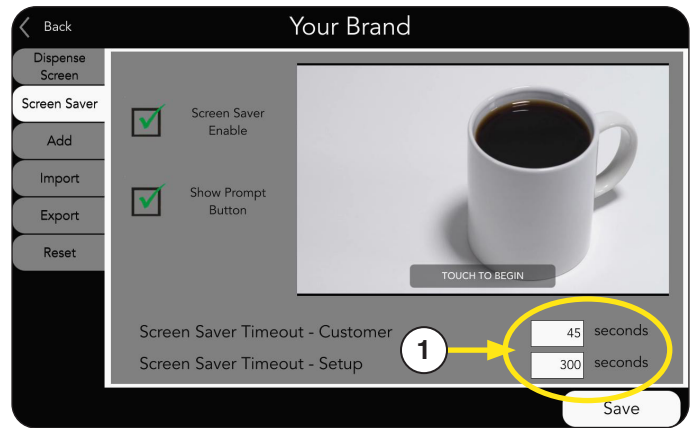


2. Change time in Input Field.

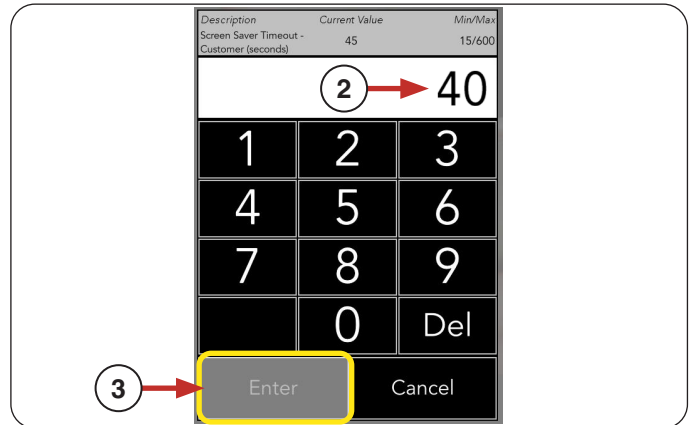


3. Select Enter.

4. Select Save.

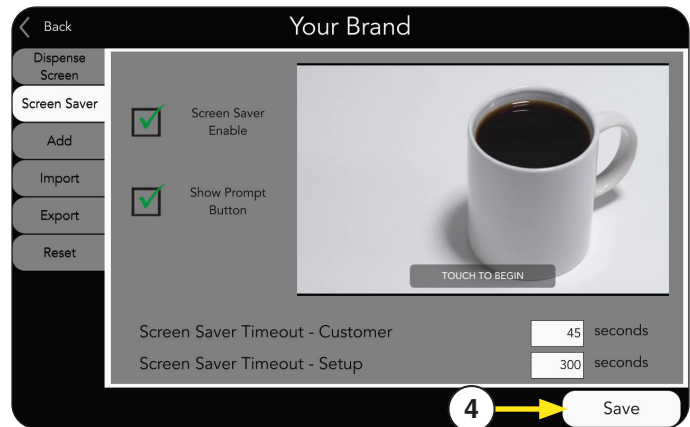

ADD

1. Images can be imported onto the machine using the Add tab.
2. Connect a USB stick with images into to the port located behind the lower door.
3. Follow steps on the screen when the USB stick is recognized.

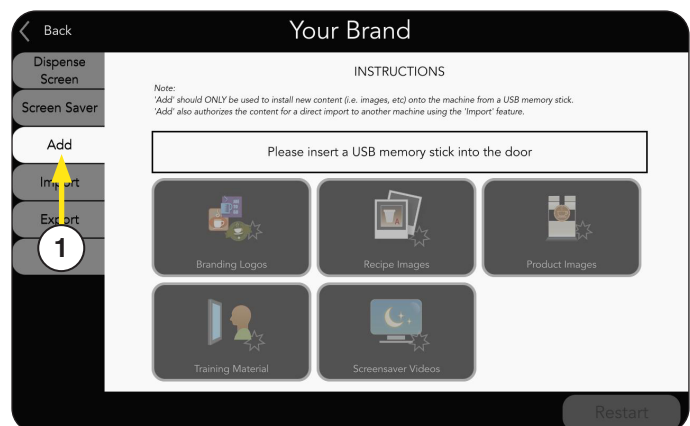

SETUP MENU

Continued from previous page


IMPORT

Custom Configuration Files


If you have a USB stick with custom files; follow these steps.

1. Press the Import tab.


NOTE: To verify a USB stick is recognized, look for the connection icon in the upper right corner of the screen.

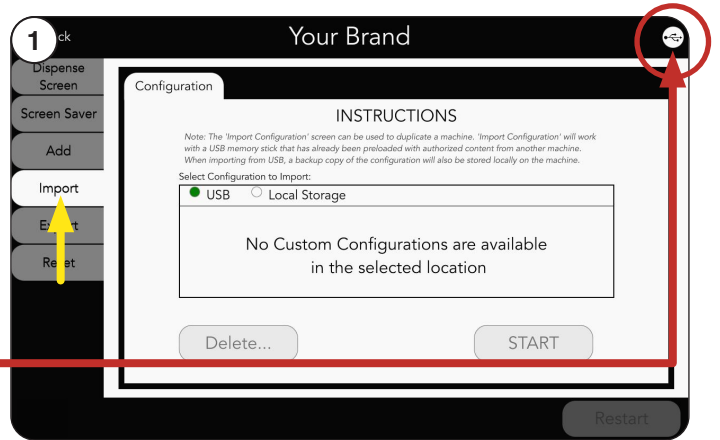

2. Open the Lower Door and Insert USB Stick.

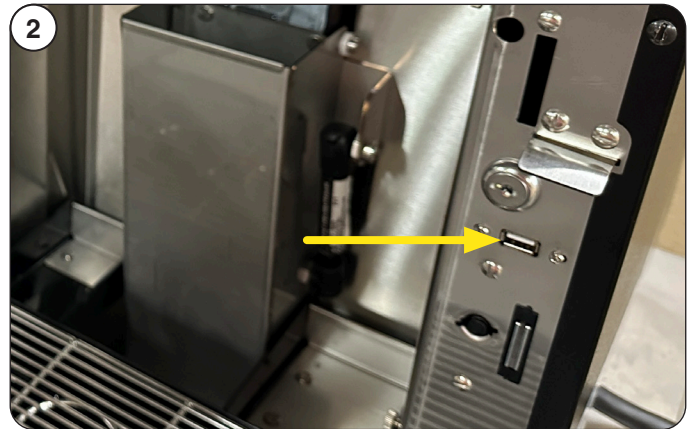


3. Select new Configuration file.

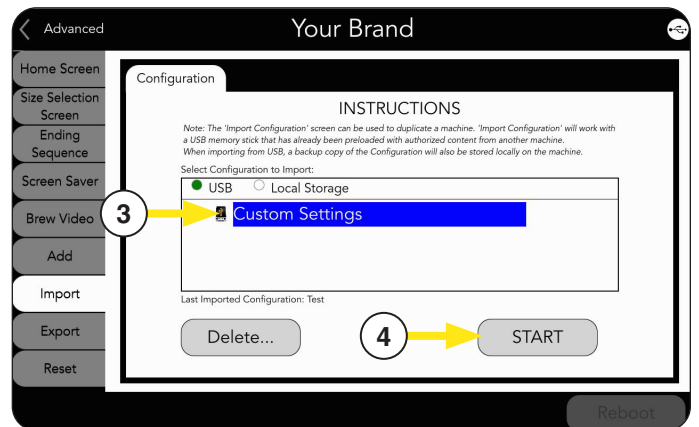

4. Press Start button.

5. Screen will show progress of file import.


NOTE: Do not remove USB Stick while files are copying.

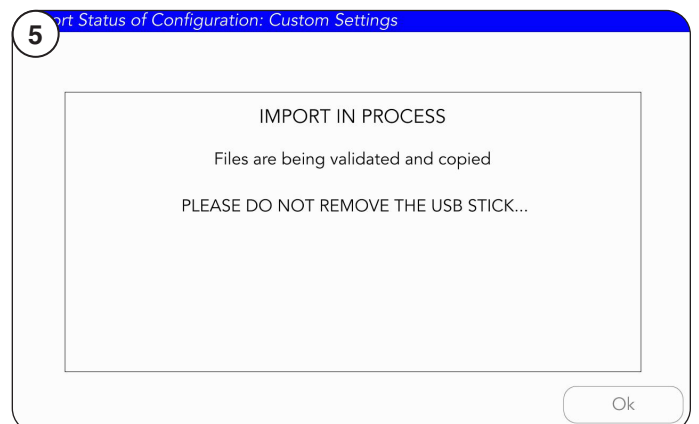

SETUP MENU


Continued from previous page

- When the import is completed, the OK button can be selected and the USB stick can be safely removed.

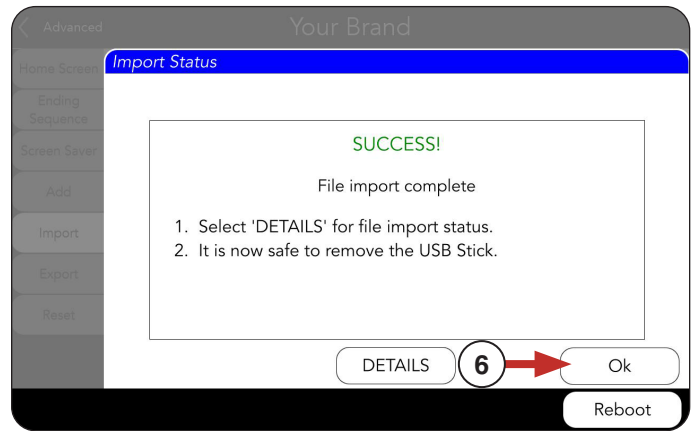

- Press Reboot button to complete import.

NOTE: This will restart the machine's operating system.

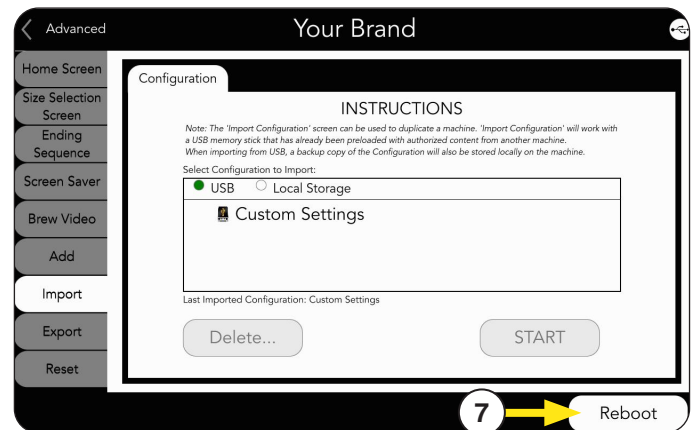

- The machine will update with your custom Configuration files.

Example Shown: After the machine updates, the Home screen should appear, and the Products and variables you imported should be available.




EXPORT

Setup of Multiple Machines

Once a machine is setup, you can export all of the settings and recipes to a USB Stick, and then copy this information to other machines (if they are to be setup the same way).

- Select the Export tab.
- Next, the user is prompted to insert the USB stick and enter a configuration name.

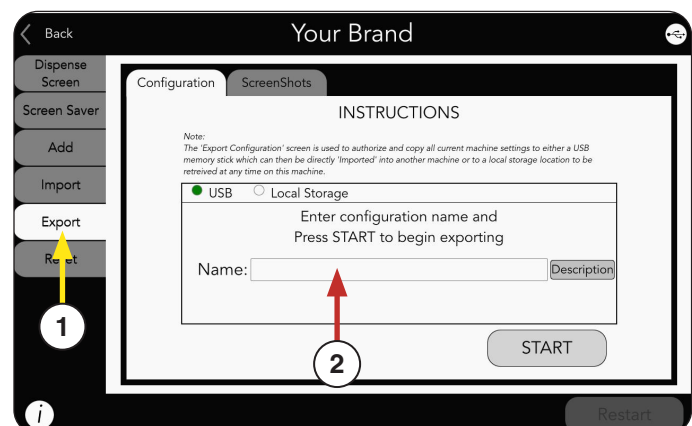


EXPORTING DATA USING USB


Continued from previous page

- The USB port is located behind the lower access door.

NOTE: The BUNN default USB Stick is part number 64165.0000

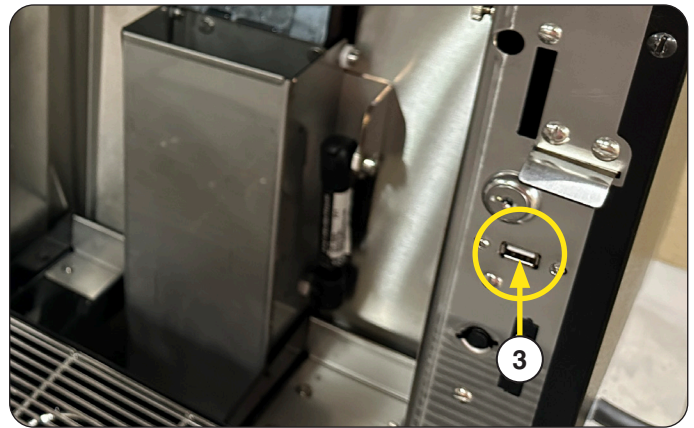

- Press Start and a confirmation screen will appear showing the progress of the export.
- For more information after the export is complete, press the Details button.
- When the export is complete, remove the USB stick.

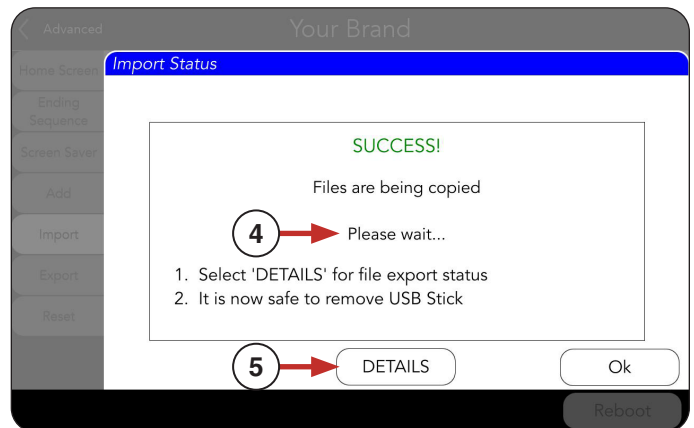

- Close the lower access door.



- Press Restart button.

NOTE: The machine will return to the Home Screen when Restart is complete.



