ASIA PACIFIC CATALOG

BUNN®

2022 EQUIPMENT CATALOG

QUALITY SINCE 1840™

Bunn-O-Matic Corporation® can trace its foundation to 1840 when Jacob Bunn opened his grocery store in a developing Springfield, IL USA, and a young Abe Lincoln was one of his first customers.

That venture grew into Bunn Capitol Wholesale Grocery Company and was later managed by George R. Bunn who founded a beverage equipment division in the late 1950s. Bunn-O-Matic Corporation was officially incorporated as a separate entity in 1963, and since that time has been at the forefront of dispensed beverage equipment manufacturers.

The company remains privately-held and family-owned through five generations of Bunn family entrepreneurship. It has evolved from a foodservice and coffee focus to include a long list of equipment innovations in all dispensed beverage categories. Now often referred to simply as "BUNN," the company has become a global partner you can count on for profitability, reliability and support wherever customers are served.

TABLE OF CONTENTS

DID YOU KNOW THAT WE HAVE LOCATIONS AROUND THE WORLD TO SERVE YOU?

CANADA - AURORA, ONTARIO • MEXICO - MEXICO CITY • BRAZIL - SÃO PAULO

UNITED KINGDOM - BIRMINGHAM • CHINA - SHANGHAI • CHINA - SHENZHEN

AGENCY SYMBOLS

NSF NSF International

CE CE Listed

EAC EurAsian Conformity Mark

RCM RCM

KC KOREA South Korea

UL LISTED UL Listed

CCC China Compulsory Certification

ETL Intertek Electrical Testing Labs Sanitation

ETL us Intertek Electrical Testing Labs Safety

ELECTRICAL PLUGS

CHINA CCC

EURO CE

KOREA

UK CE

NEMA-5-15P

COFFEE

Infusion Series® Platinum Edition®

The Infusion Series Platinum Edition line of brewing equipment is equipped with an intuitive touch screen, providing an enhanced user experience when operating and programming the brewers

ICB and ICB Twin

Intuitive 10.9cm touchscreen with user interface provides an enhanced experience when operating and programming the brewers

The Infusion Series® Platinum Edition relies on the powerful duo of the Peak Extraction Sprayhead and SmartWAVE® technology to further enhance the uniformity of extraction and resistance to limescale buildup.

USB port for easy programming

Digital readout displays in English, Spanish, or French ---for easier programming and control

Electronic funnel lock prevents removal of each brew funnel until drip- through is complete

ICBA PE is compatible with new TF 3.8-Liter Baseless ThermoFresh® Servers, all previous generations of TF 3.8-Liter Baseless TF Servers, and Airpots

ICB TF 54200.0500 is compatible with new TF 1.5-gallon ThermoFresh® Servers (with Base), all previous generations of TF 1.5-gallon TF Servers (with Base), Titan® 1.5-gallon servers, and Airpots

ICB Twin TF 54300.0500 is compatible with new TF 1.5-gallon ThermoFresh® Servers (with Base), all previous generations of TF 1.5-gallon TF Servers (with Base), Titan® 1.5-gallon servers, and Airpots

ENERGY STAR

⚠ Servers sold separately

ICB DV | ICB TF 1.5 PE | ICB Twin TF

DESCRIPTION				CAPACITY		ELECTRICAL						AGENCY
Product #	Model	Finish	Funnel Type	Dimensions Height x Width x Depth (Centimeters)	236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
53300.0500	ICBA PE	STAINLESS	BLACK/SMART	68.10 25.40 56.13	141	220-240	11.0-12.0	2400-2900	50-60	1	EURO	C€
53300.0501	ICBA PE CE	STAINLESS	STAINLESS/ SMART	68.10 25.40 56.13	141	200-240	27.7	2400-2900	50-60	1	UK	
54200.0500	ICB TWIN TF 1.5 PE	STAINLESS	STAINLESS/ SMART	86.4 57.4 59.2	82 136 181	200	27.8	5550	50-/60	1		
54300.0500	ICB TF 1.5 PE	STAINLESS	STAINLESS/ SMART	86.4 30.7 60.5	150	200	16.2	3240	50-60	1		

SOLD SEPARATELY

Single/Dual Filter Pack
20138.1000

Inlet Hose Assembly
32865.1002

Servers

Legs
00511.0000

Infusion Series® Standard Edition

The Infusion Series coffee and tea equipment platform provides Best Result In The Cup™ performance with the proven industry knowledge to deliver the lowest cost of ownership

ICBA & ICBB

Sleek modernized design language on the brewer and servers

The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup

Three brew buttons and two batch sizes allow for multiple brewing profiles

Easy Pulse programing automatically adjusts contact time for optimal flavor profile

Compatible with BrewWISE® intelligence

Servers sold separately ⚠

ENERGY STAR

ICB

DESCRIPTION							CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Finish	Funnel Type	Dimensions Height x Width x Depth (Centimeters)			236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
53100.0501	ICBA	STAINLESS	BLACK/SMART	68.10	25.40	55.90	141	220-240	11-12	2400-2900	50-60	1	UK	CE
53100.0502	ICBA	STAINLESS	BLACK/SMART	68.10	25.40	55.90	141	220-240	11-12	2400-2900	50-60	1	EURO	CE
53100.0504	ICBB	STAINLESS	BLACK/SMART	68.10	25.40	55.90	141	200	18	3600	50-60	1		
53100.0505	ICBA	STAINLESS	BLACK/SMART	63.10	25.40	55.90	141	220-240	11-12	2400-2900	50-60	1	KOREA	KC
53100.0506	ICBA	STAINLESS	BLACK/SMART	68.10	25.40	55.90	141	220-240	11-12	2400-2900	50-60	1	N/A	
53100.0507	ICBA	STAINLESS	BLACK/SMART	68.10	25.40	55.90	141	220-240	13.2-14.1	2900-3400	50-60	1	CHINA	

SOLD SEPARATELY

Single/Dual Filter Pack
20138.1000

Inlet Hose Assembly
32865.1002

Servers

Legs
00511.0000

6   *Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

Infusion Series® Soft Heat® Edition

BUNN-exclusive Soft Heat technology supplies controlled heat to the brewed coffee within the server whenever it's docked on the brewer, ensuring ideal holding temperatures and optimal flavor for longer periods

ICB SH AND TWIN SH

Sleek modernized design language on the brewer and servers

Three brew buttons and three batch sizes allow for multiple brewing profiles

Easy Pulse programming automatically adjusts contact time for optimal flavor profile

Wireless Server monitoring on some models allows for remote tracking of coffee freshness on mobile devices

New Infusion Soft Heat® servers [sold separately] are ergonomic, lighter weight, energy efficient and now offer programmable recipe/batch based holding times and temperatures, alerting staff when freshness has expired or server is empty

Compatible with new TF 5.7L ThermoFresh® Servers (without Base), and all previous generations of TF 5.7L TF Servers (without Base)

The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup

ENERGY STAR

Servers sold separately

Infusion Series®
Soft Heat® Stainless

Infusion Series®
Soft Heat® Stainless

Infusion Series®
Soft Heat® Stainless

DESCRIPTION							CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Finish	Funnel Type	Dimensions Height x Width x Depth (Centimeters)			236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
51100.0500	ICBA SH	STAINLESS	BLACK/SMART	83.3	30.0	59.4	163	220-240	13.2-14.1	2900-3400	50-60	1	EURO	CE
52100.0500	ICB SH PE	STAINLESS	STAINLESS	83.3	30.0	58.9	163	200	13.2-14.1	2900-3400	50-60	1		
53600.0500	ICB Twin SH PE	STAINLESS	STAINLESS	83.3	55.6	58.4	259	200	27.7	5560	50-60	1		

SOLD SEPARATELY

Single/Dual Filter Pack
20138.1000

Inlet Hose Assembly
32865.1002

Servers
27850.0200

Soft Heat® Single®

BUNN-exclusive Soft Heat® technology supplies controlled heat to the brewed coffee within the server whenever it's docked on the brewer, ensuring ideal holding temperatures and optimal flavor for longer periods

Brews 1.9, 3.8 or 5.7L batches

Brews up to 43.2L per hour with three variable batch sizes

Instant power contact with docking station; server can be set to 79.4°– 87.8°C

Metric volume and Celsius temperature settings

BrewWISE® intelligence means compatible grinders and a Smart Funnel® can be programmed one time to manage repeated brewing cycles from start to finish

Servers sold separately ⚠

Dual SH DBC

Single SH DBC

DESCRIPTION			CAPACITY		ELECTRICAL						AGENCY
Product #	Model	Funnel Type	Dimensions Height x Width x Depth (Centimeters)	236mL cups/hr	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
33600.0006	SINGLE SH DBC	SMART	90.93 23.62 58.67	214	230	19	4400	50-60	1	NO	(NSF) CE
33600.0012	SINGLE SH DBC	STAINLESS	90.93 23.62 58.67	157	220-240	14.5-15.7	3180-3780	50-60	1	KOREA	KC (NSF)

Plumbing: 138-621 kPa. Machines supplied with 1⁄4" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Single/Dual Filter Pack
20138.1000

EQHP-10
39000.0004

Inlet Hose Assembly
32865.1002

EQHP-10L
39000.0001

One Position Drip Tray
26830.0000

⚡ *Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

ThermoFresh® Single®

TF brewers use Digital Brewer Control™ with insulated ThermoFresh servers that keep bevarages hot without requiring the energy consumption of traditional warming plates

Three variable batch sizes

SplashGard® funnel and funnel locks help improve safety

BrewWISE® intelligence means compatible grinders and a Smart Funnel® can be programmed one time to manage repeated brewing cycles from start to finish

Stores individual coffee recipes so operator can easily brew many varieties

⚠ Servers sold separately

Single TF DBC
Stainless

DESCRIPTION							CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Finish	Funnel Type	**Dimensions** Height x Width x Depth (Centimeters)			236mL cups/hr**	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
34800.0009	SINGLE TF DBC	BLACK	SMART	90.68	30.73	57.7	140-182	220-240	14.5-15.7	3180-3780	50-60	1	EURO	CE ⬙
34800.0012	SINGLE TF DBC	STAINLESS	SMART	90.68	30.73	57.7	140-182	220-240	14.5-15.7	3180-3780	50-60	1	EURO	CE ⬙
34800.0033	SINGLE TF DBC	STAINLESS	SMART	90.68	30.73	57.7	140-182	220-240	14.5-15.7	3180-3780	50-60	1	NO	CE
34800.0036	SINGLE TF DBC	STAINLESS	SMART	90.68	30.73	57.7	172	220-240	14.5-15.7	3180-3780	50/60	1	KOREA	ⓚ

Plumbing: 138-621 kPa. Machines supplied with 3/8" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Single/Dual Filter Pack
20138.1000

Inlet Hose Assembly
32865.1002

Servers and Stands

ThermoFresh® Dual®

TF brewers use Digital Brewer Control™ with insulated ThermoFresh servers that keep bevarages hot without requiring the energy consumption of traditional warming plates

Brews 61.7 to 71.5L of coffee per hour

Three variable batch sizes

BrewWISE® intelligence means compatible grinders and a Smart Funnel® can be programmed one time to manage repeated brewing cycles from start to finish

Stores individual coffee recipes so operator can easily brew many varieties

Servers sold separately ⚠

Dual TF DBC

DESCRIPTION							CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Finish	Funnel Type	Dimensions Height x Width x Depth (Centimeters)			236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
34600.0011	DUAL TF DBC	STAINLESS	SMART	90.68	55.37	60.5	302	220-240	27-29.5	6000-7100	50-60	1	NO	CE ⬨
34600.0020	DUAL TF DBC	STAINLESS	SMART	90.68	55.37	57.4	276	230	33.5	8000	50-60	1	NO	CE NSF
							414	400	16	11125	50-60	3		

Plumbing: 138-621 kPa. Machines supplied with 3/8" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

Single/Dual Filter Pack
20138.1000

Inlet Hose Assembly
32865.1002

Servers and Stands

*Capacity based on equipment voltage of 230V

SmartWAVE® Thermal

BUNN exclusive brewing technology that increases turbulence in the funnel for uniformity of extraction

Adjustable low profile design can accommodate a variety of thermal servers and countertop configurations

Analog switches accompanied by red/green LED for programming and brewing status (Ready, Heating, Brewing)

Choice of 3 pulse brew settings to adjust Flavor profile

Energy Saver Mode reduces tank temperature during idle periods

Specialty

Includes Gourmet C funnel for larger throw weights

Large 17-hole sprayhead maximizes uniformity of extraction

WAVE -S-BF-APS
with Airpot

WAVE -S-BF-APS
with Gourmet Funnel

WAVE-S-BF-APS
with Thermal Carafe on Slide-out
Booster Tray

Servers sold
separately

DESCRIPTION				CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Funnel Type	Dimensions Height x Width x Depth (Centimeters)	236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
39900.0017	WAVE-S-BF-APS SPECIALITY	GOURMET C	47.47 24.66 43.79	84-90	220-240	8.3-9	1800-2200	50-60	1	EURO	CE

Plumbing: 138-621 kPa. Machines supplied with 1⁄4" hose thread adapter and fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Regular Filter Pack
20115.0000

Servers

Black Plastic Funnel
20583.0000

Gourmet Filter Pack
20157.0001

AXIOM® Thermal Brewers

Medium volume brewing solution featuring Digital Brewer Control™ for precise extraction control

APS Equipment brews directly into 1.9 - 3.0L airpots

Programmable Energy Saver Mode reduces operating cost during idle periods

Cold brew lock-out and automatic warmer time-out ensure high quality, fresh tasting coffee

Front of machine programming simplifies installation

TC equipment brews directly into thermal carafes up to 21.6cm tall

Servers sold separately ⚠

AXIOM-APS

AXIOM-TC

DESCRIPTION						CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Funnel Type	Dimensions Height x Width x Depth (Centimeters)			236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
38700.0037	AXIOM-APS	BLACK PLASTIC	59.94	22.86	46.99	90	220-240	12.5-13.6	2750-3275	50-60	1	EURO	CE
38700.0074	AXIOM-APS	BLACK PLASTIC	59.94	22.86	46.99	90	230	15.7	3600	50-60	1	AUS	⬖
38700.0104	AXIOM-TC	STAINLESS	45.2	22.9	47.0	80	220-240	6.7-7.3	1475-1750	50-60	1	EURO	CE

Plumbing: 138-621 kPa. Machines supplied with 3/8" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Regualr Filter Pack
20115.0000

Servers

Airpots

Gourmet C Funnel
34559.0000

Gourmet Filter Packs
20157.0001

⚡ *Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

CW Airpot

Simple switch controls and flexible server options

CWA

CWA models are pourover only

No facuet

CWTFA

Brew directly into 1.9 to 3.0L airpots

Hot water faucet with pourover backup feature

Digital timer enables users to make cycle adjustments from front panel

Servers sold separately

CWTFA-APS

DESCRIPTION				CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Funnel Type	Dimensions Height x Width x Depth (Centimeters)	236mL cups/hr	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
POUROVER - NO FAUCET											
23001.0024	CWA-APS	BLACK PLASTIC	61.2 22.9 49.5	84-90	220-240	8.6-9.5	1900-2300	50-60	1	EURO	CE
23001.0074	CWA-APS	BLACK PLASTIC	61.2 22.9 49.5	84-90	220-240	8.6-9.5	1900-2300	50-60	1	UK	NSF CE
AUTOMATIC - WITH FAUCET											
23001.0021	CWTFA-APS	BLACK PLASTIC	61.2 22.9 54.6	84-90	220-240	8.6-9.5	1900-2300	50-60	1	EURO	NSF CE

Plumbing: 138-621 kPa. Machines supplied with 1/4" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Regular Filter Pack
20115.0000

Inlet Hose Assembly
32865.1001

Gourmet C Funnel
34559.0000

Gourmet Filter Packs
20157.0001

Thermal Carafe

Brew directly into portable insulated servers that keep coffee at optimal temperature profile

Accepts thermal carafe up to 21.6cm

Use in quick-turn environment where high quality coffee is continuously refreshed

Simple switch controls

CWA-TC

Pourover brewer requires no plumbing – completely portable

CWTFA-TC

Hot water faucet and pourover backup feature

Servers sold separately ⚠

CWTFA-TC   CWA-TC

DESCRIPTION				CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Funnel Type	Dimensions Height x Width x Depth (Centimeters)	236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
POUROVER - NO FAUCET											
23001.0105	CWA-TC	BLACK PLASTIC	45.47 22.86 46.99	83	220-240	8.6-9.5	1900-2300	50-60	1	EURO	CE
AUTOMATIC - WITH FAUCET											
12950.0362	CWTFA-TC	BLACK PLASTIC	45.47 22.86 46.99	83	220-240	8.6-9.5	1900-2300	50-60	1	EURO	CE

Plumbing: 138-621 kPa. Machines supplied with 1/4" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Regular Filter Pack
20115.0000

Inlet Hose Assembly
32865.1001

CARAFES

*Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

AXIOM® Automatic 3 Warmers

Plumbed, medium volume brewing solution with Digital Brewer Control™ for precise extraction control

Large 5.9L tank provides back-to-back brewing capacity

For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent brew levels

Coffee extraction, brew level, cold brew lock-out and tank temperature controlled with programmable features

Electronic diagnostics and built-in tank drain simplify maintenance and service

Energy Saver Mode

AXIOM-3

⚠ *Servers sold separately*

DESCRIPTION							CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Warmers	Funnel Type	Dimensions Height x Width x Depth (Centimeters)			236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
38700.0038	AXIOM-3	2 UPPER/ 1 LOWER	STAINLESS	48.01	21.59	54.36	79	220-240	13.2-14.4	2900-3500	50-60	1	EURO	CE
38700.0039	AXIOM-3	2 UPPER/ 1 LOWER	STAINLESS	48.01	21.59	54.36	79	220-240	8.6-9.0	1900-2100	50-60	1	EURO	CE
38700.0004	AXIOM-3	2 UPPER/ 1 LOWER	PLASTIC	48.01	21.59	54.36	79	220-240	8.6-9.0	1900-2100	50-60	1	EURO	CE
38700.0033	AXIOM-3	2 UPPER/ 1 LOWER	PLASTIC	48.01	21.59	54.36	79	220-240	14.2-15.6	3200-3800	50/60	1	CHINA	CCC
38700.0051	AXIOM 1/2 Batch	2 UPPER/ 1 LOWER	STAINLESS	48.01	21.59	54.36	120	200	19	3800	50/60	1	NO	
38700.0055	AXIOM 1/2 Batch	2 UPPER/ 1 LOWER	STAINLESS	48.01	21.59	54.36	58	100	15	1500	50/60	1	NEMA	
38700.0064	AXIOM-3	2 UPPER/ 1 LOWER	STAINLESS	48.01	21.59	54.36	79	220-240	8.6-9.0	1900-2100	50/60	1	KOREA	

Plumbing: 138-621 kPa. Machines supplied with 1/4" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Regular Filter Pack
20115.0000

Inlet Hose Assembly
32865.1001

Decanters

Automatics with Upper Warmers

Plumbed, medium volume brewing solution with simple switch controls

CWTFA & CWTF35A

SplashGard® funnel deflects hot liquids away from the hand

Plastic or Gourmet C funnel options

Hot water faucet and pourover backup on all models

Servers sold separately ⚠

CWTF-35A

DESCRIPTION							CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Warmers	Funnel Type	Dimensions Height x Width x Depth (Centimeters)			236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
12950.0277	CWTF35A	2 UPPER/ 1 LOWER	PLASTIC	48.01	21.59	45.21	90	220-240	14.5-15.8	3200-3800	50-60	1	EURO	(NSF) CE

Plumbing: 138-621 kPa. Machines supplied with 1⁄4" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Regular Filter Pack
20115.0000

Inlet Hose Assembly
32865.1001

Decanters

Pourover Decanter Brewer 1 Warmer - VP17A-1

Ideal simple switch control office coffee brewer that does not require plumbing or special wiring

Space-saving design; under 45.2cm tall

SplashGard® funnel deflects hot liquids away from the hand

Pourover brewer requires no plumbing – completely portable

⚠ Servers sold separately

VP17A-1

DESCRIPTION						CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Warmers	Dimensions Height x Width x Depth (Centimeters)			236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
13300.0024	VP17A-1	1 LOWER	43.94	21.59	44.96	93	220-240	9-9.9	2000-2375	50-60	1	EURO	CE

SOLD SEPARATELY

Regular Filter Pack
20115.0000

Decanters

Pourover Decanter Brewer 2 Warmer - VP17A-2

Ideal simple switch control office coffee brewer that does not require plumbing or special wiring

Two separately controlled warmers

SplashGard® funnel deflects hot liquids away from the hand

Pourover brewer requires no plumbing – completely portable

Servers sold
separately ⚠️

VP17A-2

DESCRIPTION						CAPACITY	ELECTRICAL						AGENCY
Model	Product #	Warmers	**Dimensions** Height x Width x Depth (Centimeters)			236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
13300.0015	VP17A-2	1 UPPER/ 1 LOWER	48.01	21.59	45.21	104	220-240	9.5-10.4	2100-2500	50-60	1	EURO	CE
13300.0041	VP17A-2	1 UPPER/ 1 LOWER	48.01	21.59	45.21	104	220-240	9.5-10.4	2100-2500	50-60	1	UK	CE

SOLD SEPARATELY

Regular Filter Pack
20115.0000

Decanters

*Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

Pourover Decanter Brewer 3 Warmers - VP17A-3

Ideal simple switch control office coffee brewer that does not require plumbing or special wiring

Three separately controlled warmers

SplashGard® funnel deflects hot liquids away from the hand

Pourover brewer requires no plumbing – completely portable

VP17B-3

⚠ *Servers sold separately*

DESCRIPTION						CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Warmers	Dimensions Height x Width x Depth (Centimeters)			236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
13300.0028	VP17B-3	2 UPPER/ 1 LOWER	48.01	21.59	45.21	57	100	15	1495	50	1	NEMA	

SOLD SEPARATELY

Regular Filter Pack
20115.0000

Decanters

Titan® Dual®

High volume solution using fresh ground coffee and featuring Digital Brewer Control™

Increased brewing capacity

Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; variable bypass controls coffee strength

BrewMETER® allows for easy programming of pulse routine

Funnel has 0.8kg capacity and paper filter retainers to eliminate fold-over

Servers sold separately ⚠️

Titan Dual

DESCRIPTION						CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Funnel Type	Dimensions Height x Width x Depth (Centimeters)			236mL cups/hr	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
39200.0002	TITAN DUAL	STAINLESS	101.65	90.50	55.22	503	400	16	11125	50-60	3	No	CE ⚠️
						307-366*	220-240	28-33	6200-8000	50-60	1		

Plumbing: 138-621 kPa. Machines supplied with 3/8" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Flavor Label
41745.1000

Single/Dual Filter Pack
20111.0000

Inlet Hose Assembly
32865.1002

Titan Funnel
40114.0000

11.4L Titan Server
39400.0001

5.7L Titan Server
46300.0000

⚡ *Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

Urns

Unique urn brewer design ensures low evaporation loss

U3 TWIN

Two spigots

Large water tank holds over 75.7L

Half-batch option

U3

DESCRIPTION						CAPACITY	ELECTRICAL						AGENCY
Product #	Model	Funnel Type	Dimensions Height x Width x Depth (Centimeters)			236mL cups/hr*	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
20500.0016	U3A	PLASTIC	82.30	87.63	53.34	278	220-240	26.4-28.6	5800-6850	50-60	1	No	CE

Plumbing: 138-621 kPa. Machines supplied with 3/8" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Urn Filter Pack
20109.0000

Decanters

Drip Tray (U3)
07284.0000

Inlet Hose Assembly
32865.1001

GRINDERS

G Series VH Grinder

Users have 340° of grind resolution on the "no-click" selection dial, giving them complete freedom when dialing-in their ideal grind particle size

Available in .45kg, .91kg, and 1.36kg versions, the GVH features hoppers that are sleek, tinted, and incredibly durable

Versatile design allows grinding into bags, cans, and cups and other containers to meet a multitude of customer needs

Fast grinding – one pound (.45kg) in about 30 seconds – maximizes speed of service

340° dial resolution for precise tuning of grind particle size

Ergonomic clamp for holding smaller size bags and containers in place for hands-free operation

Easy to use cleaning lever for complete removal of coffee from grind chamber ensures the customer gets all the coffee ground for them

Precision Rockwell 65C hard burrs provide consistency, grind after grind

Bag switch prevents grinding before bag/container is in place

Four-year warranty on grinding burrs

GVH-2   GVH-3

DESCRIPTION						CAPACITY		ELECTRICAL						AGENCY
Product #	Model	Finish	Dimensions Height x Width x Depth (Centimeters)			Number of Hoppers	Kg per Hopper	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
55600.0201	GVH-2A TURK BURR	STAINLESS	62.50	17.80	40.40	1	.90	220-240	6.5-7.8	990-1080	50-60	1	EURO	CE
55600.0301	GVH-3A	STAINLESS	65.50	17.80	40.40	1	1.36	220-240	6.5-7.8	990-1080	50-60	1	EURO	CE
55600.0304	GVH-3A	STAINLESS	65.50	17.80	40.40	1	1.36	220-240	6.5-7.8	990-1080	50-60	1	UK	CE

SOLD SEPARATELY

GVH Hopper 1lb/.45kg
54329.1000

GVH Hopper 2lb/.91kg
54332.1000

GVH Hopper 3lb/1.4kg
54335.1000

Multi-Hopper Series Grinder and Storage System

An intuitive, portion-controlled coffee grinding system that handles multiple bean varieties

Portion-controlled for the right amount of coffee every time, with 3 batch sizes per hopper

Convenient front-loading hoppers are easy to clean and store individual coffee grind weight profiles

Choice of black or stainless finish

BrewWISE® intelligence means the Smart Funnel® manages the grinding and brewing process from start to finish:

Grinder adjusts the grind time for each batch to deliver just the right grind volumes

Grinder communicates coffee batch size and coffee name to the Smart Funnel during grinding process

BrewWISE brewer reads the information in the Smart Funnel, adjusts the recipe, and brews a flavorful batch of coffee

Rack and Hopper

Store and display coffee varieties and promote fresh ground coffee program

Hoppers with locking lids serve as storage containers when not in the grinder *(lock for lids sold separately)*

MHGA

DESCRIPTION				CAPACITY		ELECTRICAL						AGENCY
Product #	Model	Finish	Dimensions Height x Width x Depth (Centimeters)	Number of Hoppers	Kg per Hopper	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
35600.0021	MHGA	STAINLESS	73.91 23.77 45.72	2	2.72	220-240	6.5	920	50-60	1	EURO	CE
35600.0023	MHGA	BLACK	73.91 23.77 45.72	2	2.72	220-240	6.5	920	50-60	1	EURO	CE
35600.0025	MHG	STAINLESS	73.91 23.77 45.72	2	2.72	100	9	900	50	1	NEMA	
35600.0137	MHGA	STAINLESS	73.91 23.77 45.72	2	2.72	220-240	6.5	920	50-60	1	UK	CE

SOLD SEPARATELY

2 Position Rack
36760.0000

4 Position Rack
36760.0001

Hopper/Lid Assembly
36845.0000

Hopper Partition
36053.0000

*Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

Weight Driven Series Grinder

Weight-based, portion-control for the right amount of coffee every time with three batch sizes

Unparalleled grind weight accuracy

Front-loading, removable hopper is easy to clean

BrewWISE® intelligence means the Smart Funnel® manages the grinding and brewing process from start to finish:

Grinder communicates coffee weight to the Smart Funnel during the grinding process

BrewWISE brewer reads the information in the Smart Funnel, adjusts the recipe, and brews a flavorful batch of coffee

G9WD-RH

DESCRIPTION						CAPACITY		ELECTRICAL						AGENCY
Product #	Model	Finish	Dimensions Height x Width x Depth (Centimeters)			Number of Hoppers	Kg per Hopper	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
40700.0132	G9WD-RH	STAINLESS	75.69	20.68	48.26	1	2.72	220-240	6.5	920	50-60	1	EURO	CE
40700.0137	G9WD-RH	STAINLESS	75.69	20.68	48.26	1	2.72	220-240	6.5	920	50-60	1	UK	CE

SOLD SEPARATELY

Hopper/Lid Assembly
36845.0000

Hopper Partition
36053.0000

Portion Control Series Grinder

Portion controlled for the right amount of coffee every time, with three batch sizes per hopper

Two hoppers hold 2.7kg each of regular, decaf or specialty coffee beans

Three batch sizes per hopper, with individual grind profiles

Compatible with BrewWISE TF, SG, ICB

BrewWISE® intelligence means the Smart Funnel® manages the grinding and brewing process from start to finish:

Grinder adjusts the grind time for each batch to deliver just the right grind volumes

Grinder communicates coffee batch size and coffee name to the Smart Funnel during grinding process

BrewWISE brewer reads the information in the Smart Funnel, adjusts the recipe, and brews a flavorful batch of coffee

G9-2TA DBC

DESCRIPTION						CAPACITY		ELECTRICAL						AGENCY
Product #	Model	Finish	**Dimensions Height x Width x Depth (Centimeters)**			Number of Hoppers	Kg per Hopper	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
33700.0007	G9-2TB DBC	STAINLESS	68.83	21.08	45.72	2	2.72	100	9.4	940	50	1	NEMA	
33700.0132	G9-2TA DBC	STAINLESS	68.83	21.08	45.72	2	2.72	220-240	6.5	920	50-60	1	EURO	CE

*Capacity based on equipment voltage of 230V   For additional product specifications and images visit bunn.com.

French Press Portion Control Series Grinder

Portion controlled for the right amount of coffee every time, with three batch sizes per hopper

Accommodates up to 20.3cm tall cafetière or funnel for drip-style brewer

Multi-batch setting allows users to specify a French press brew size or grind enough coffee into a funnel to brew larger amounts of drip-style coffee

Compatible with VP, CW, Axiom, SmartWAVE®

FPG-2 A DBC

Two hoppers hold 1.36kg each of regular and decaf or specialty beans

Digital touch pad for front-of-machine programming and LCD readout

FPG-2 DBC

French press for display purposes only, not available for purchase

FPGA

DESCRIPTION						CAPACITY		ELECTRICAL						AGENCY
Product #	Model	Finish	Dimensions Height x Width x Depth (Centimeters)			Number of Hoppers	Kg per Hopper	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
36400.0132	FPGA-2	STAINLESS	56.90	21.08	25.40	2	1.36	220-240	1.5	360	50-60	1	EURO	
36400.0137	FPGA-2 DBC	STAINLESS	56.90	21.08	25.40	2	1.36	220-240	1.5	360	50-60	1	UK	
36800.0132	FPGA	STAINLESS	51.60	21.08	28.70	1	1.36	220-240	1.5	330-360	50-60	1	EURO	
36800.0137	FPGA SST	STAINLESS	51.60	21.08	28.70	1	1.36	220-240	1.5	330-360	50-60	1	UK	

For additional product specifications and images visit bunn.com.

*Capacity based on equipment voltage of 230V

Bulk Series Grinder

High volume grinding systems with turbo action that draws the coffee through the chamber for greater grinding speed and efficiency

G3A HD

Grinds .45kg in approximately 30 seconds

Wide range of grinds can be selected

Convenient cleaning lever ensures complete clean out of grind chamber

G3A HD

DESCRIPTION				CAPACITY		ELECTRICAL						AGENCY
Product #	Model	Finish	Dimensions Height x Width x Depth (Centimeters)	Number of Hoppers	Kg per Hopper	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
22100.0232	G3A HD	BLACK	67.31 18.54 40.64	1	0.91	220-240	6.5-7.8	990-1080	50-60	1	EURO	CE
22100.0023	G3A HD	BLACK	67.31 18.54 40.64	1	1.36	220-240	6.5	990-1080	60	1	KOREA	KC

*Capacity based on equipment voltage of 230V   For additional product specifications and images visit bunn.com.

BEAN
TO
CUP

Crescendo®

Authentic single-cup espresso served pure, or built into your choice of 9 café beverages

Touchpad features two programmable portion sizes, 8 and 12oz and 9 beverage choices, plus hot water

9 bar brew pressure used with a variable brew group produces an excellent single or double shot with beautiful crema

Engineered with three powder hoppers; two 3.3lb hoppers for the larger demand flavors and a third 2.2lb hopper that allows for additional flavor

Large 2.2 lb hopper displays whole coffee beans to provide the visualization of fresh ground coffee for each cup

Pleasing design with a compact footprint

Crescendo

DESCRIPTION			CAPACITY	ELECTRICAL						
Product #	Model	Dimensions Height x Width x Depth (Centimeters)	Shots/hr	Volts	Amps	Watts	Hertz	Phase	Plug	Agency
44300.0200	CRESCENDO	79.40 35.90 49.90	40	220-240	11.5-12.2	2500-2900	50hz	1	EURO	CE
44300.0202	CRESCENDO	79.40 35.90 49.90	40	220-240	11.5-12.2	2500-2900	50hz	1	NO	CE
44300.0213	CRESCENDO	79.40 35.90 49.90	40	220-240	11.5-12.2	2500-2900	50hz	1	UK	CE
44300.0215	CRESCENDO	79.40 35.90 49.90	40	220-240	11.5-12.2	2500-2900	60hz	1	KOREA	KC

Plumbing: 20-90 PSI. Machine supplied with garden hose fitting.

*Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

Sure Immersion®

Fresh, expertly-extracted coffee from an intuitive touchscreen experience

Filter style coffee from a vacuum system with exclusive Air Infusion® extraction control resulting in a clean, balanced cup with a smooth finish

Coffee selections include iced and hot options

Each recipe has programmable air-infusion and immersion control for the Best Result in the Cup™

Dispense fresh coffee in 5 portion sizes, programmable from 6 to 24oz cup, plus carafe

220

2 hoppers and two independent grinders with precision burrs for accurate grind profiles

Sure Immersion® 220

DESCRIPTION				CAPACITY	ELECTRICAL						
Product #	Model	Dimensions Height x Width x Depth (Centimeters)		8oz cups/hr 296mL cups/hr	Volts	Amps	Watts	Hertz	Phase	Plug	Agency
44400.0106	SURE IMMERSION 220	100 40.9	50.3	63	100	13	1300	50/60	1	NO	
44400.0108	SURE IMMERSION 220	100 40.9	50.3	63	200	12	2400	50/60	1	NO	

COFFEE &
TEA COMBOS

Infusion Series® Standard Edition Coffee and Tea Combo

The Infusion Series coffee and tea equipment platform provides Best Result in the Cup™ performance with the proven industry knowledge to deliver the lowest cost of ownership

ITCBA

Brews into all BUNN iced tea dispensers (except TDS-5),1.9 to 3.8L airpots, thermal carafes and can accommodate BUNN® ThermoFresh® Servers

The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup.

ITCBA

DESCRIPTION			CAPACITY COFFEE	CAPACITY TEA	ELECTRICAL						AGENCY
Product #	Model	Dimensions Height x Width x Depth (Centimeters)	236mL cups/hour	236mL cups/hour	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
52200.0500	ITCBA	88.90 25.65 60.45	120*	337	220-240	13.2-14.1	2900-3400	50-60	1	EURO	CE
52200.0502	ITCBA	88.90 25.65 60.45	120*	337	220-240	13.2-14.1	2900-3400	50-60	1	KOREA	KC

Plumbing: 138-621 kPa. Machines supplied with 1⁄4" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SOLD SEPARATELY

Tea Dispensers

Coffee/Tea Filter Pack
20138.0000

Airpots and Thermal Carafes

Infusion Series® Standard Edition Coffee and Tea Combo High Volume

The Infusion Series coffee and tea equipment platform provides Best Result in the Cup™ performance with the proven industry knowledge to deliver the lowest cost of ownership

Achieve a variety of flavor profiles and batch options with programmable Digital Brewer Control.

BrewWISE® intelligence with pre-infusion and pulse brew ensures ultimate control of your brewing process and maximum flavor extraction.

The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup

High volume model includes Smart Funnel® for coffee; compatible with BrewWISE® grinders

Large 3gal tank provides back-to-back brewing capacity

ITCB-DV HV

DESCRIPTION			CAPACITY COFFEE	CAPACITY TEA	ELECTRICAL						AGENCY
Product #	Model	Dimensions Height x Width x Depth (Centimeters)	236mL cups/hour	236mL cups/hour	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
52300.0500	ITCB-DV HV	88.9 25.4 61.0	366	336	220-240	11.0-12.0	2400-2900	50-60	1	EURO	CE

Compatible Dispensers - TD4T, TDS-3, TDO-4, TDO-N-3.5, TDO-N-4 Tea Dispensers, 1 and 1.5gal ThermoFresh® Severs

SOLD SEPARATELY

Teas Dispensers

Coffee/Tea Filter Pack
20138.0000

TF Servers with Stand

*Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

COLD COFFEE

COLD COFFEE
SOLUTIONS

BUNN offers a variety of profitable solutions for your Cold Coffee menu.
From fresh-brewed tailored recipes by the batch to cold brew concentrate dispensers
for multiple gallons of finished drinks, we have you covered.

LEARN MORE: bunn.com/cold-coffee

Nitron₂® Cold Draft

Keg-free design delivers authentic Cold Brew taste without need for a complex brewing process

Achieve a nitro infusion with no kegs to change-out, store, clean, or sanitize. Uses two 3.8L concentrate BIBs or BUNN refillable containers (for Ball-valve models) or two 1.9L concentrate BIBs (for Scholle models) that staff are already familiar with and each BIB yields multiple gallons of finished drinks

The Nitron® Experience: No milk or sugar needed! BUNN's exclusive in-line gas infuser produces up to 3 minutes* of cascading micro-bubbles, resulting in a nitro cold brew crowned with a smooth, silky stout-like head that tastes distinctively creamy with a velvety soft mouthfeel

Outfit the standard and nitro taps with separate beverages - your choice of cold brew coffee, iced coffee, or iced tea - all from one slim, 25.4cm wide countertop design

At a rate of one 473ml drink per minute, can dispense 60 drinks before exceeding 5°C

*Results based on product concentrate used

Nitron₂® Cold Draft
(All Black Door)

DESCRIPTION								ELECTRICAL
Product #	Model	Removable Graphic Door	All Black Door	Temperature Setting °C	Dimensions Height x Width x Depth (Centimeters)			Volts
51600.0024	NITRON BALL-VALVE EURO 4:1 to 12:1	NO	YES	5	86.36	25.40	72.14	220-240
51600.0025	NITRON BALL-VALVE UK 4:1 to 12:1	NO	YES	5	86.36	25.40	72.14	220-240
51600.0034	NITRON ALL-NITRO BALL VALVE 4:1 to 12:1	NO	YES	5	86.36	25.40	72.14	220-240
51600.0037	NITRON ALL-NITRO SCHOLLE CE 4:1 to 12:1	NO	YES	5	86.36	25.40	72.14	220-240

Nitron₂® Cold Draft Gas Module

220-240V 50-60Hz NITRON Gas Module CE, UK Plug

Designed to work directly with the Nitron Cold Draft dispenser, the Gas Module accessory is an optional external gas source to be used in place of high-pressure tanks or nitrogen generators. The Gas Module features a built-in multi-stage air filtration system to remove impurities and moisture from the air to assure great tasting Nitro beverages.

Features:

- System design allows for quick access to internal components for ease of service, with just a few hand tools

- Compatible with all Nitron Cold Draft dispensers, the modular unit can be installed under or next to the machine or beneath the counter in a cabinet. Its modular design works with new and existing Nitron dispensers already in service

- PM frequency to replace the internal air filters requires annual schedule with 1 Nitron dispenser and every 6 months when connected to 2 Nitron dispensers

- The Gas Module features integrated multi-stage FDA-compliant filters to remove impurities and moisture from the air

- Compact, space-saving design produces its own unlimited supply of gas for up to two Nitron dispensers, eliminating the need for high-pressure tanks and nitrogen generators

- 220-240V with UK plug for easy set-up and includes 8-feet of gas line with ¼" female flare fitting (washer included) for quick connection to the Nitron dispenser

- Supports up to two Nitron dispensers

Nitron₂® Cold Draft Gas Module

DESCRIPTION					ELECTRICAL		AGENCY
Product #	Model	Dimensions Height x Width x Depth (centimeters)			Volts	Plug	Listing
55660.0002	NITRON GAS MODULE 220-240v CE UK Plug	11.9	21.1	37.1	220-240	UK	CE
55660.0003	NITRON GAS MODULE 220-240v CE EURO Plug	11.9	21.1	37.1	220-240	EURO	CE

*Capacity based on equipment voltage of 230V

CAPPUCCINO
HOT CHOCOLATE

iMIX® Series

Sleek powdered beverage dispenser delivers hot drinks with exceptional reliability and taste - all from an operator friendly design

iMIX 5S+

Five 3.6kg hoppers

LED backlit door graphics

Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6g powder per second)

Side-hinged door option

Display allows adjustments and service operational testing from front of machine, communicates advertising messages, machine status, and technical support contact information

Dispense 68 355ml cups in 37 minutes before dropping 5.6°C from first cup serving temperature

Set as push and hold or single size portion control

iMIX 3

Three 3.6kg hoppers

LED backlit door graphics

Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6g powder per second)

Left or top-hinged door option

Dispense 36 355ml cups in 14 minutes before dropping 5.6°C from first cup serving temperature

Display allows adjustments and service operational testing from front of machine, communicates machine status, technical support contact information, and advertising messages

Three Sized Portion Control

iMIX-3A   iMIX-5S+A

DESCRIPTION					ELECTRICAL						AGENCY
Product #	Model	Dimensions Height x Width x Depth (Centimeters)			Volts	Amps	Watts	Hertz	Phase	Plug	Listing
36900.0014	iMIX-3A	83.31	31.24	61.21	220-240	13.6-14.5	3000-3500	50-60	1	EURO	CE
36900.0031	iMIX-3A	83.31	31.24	61.21	220-240	13.6-14.5	3000-3500	50-60	1	KOREA	KC
38100.0005	iMIX-5S+A	83.31	49.02	60.96	220-240	13.6-14.5	3000-3500	50-60	1	EURO	CE

Plumbing: 138-621 kPa. Machines supplied with 1⁄4" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

*Capacity based on equipment voltage of 230V   For additional product specifications and images visit bunn.com.

HOT
WATER

Precise Temperature *Medium Volume*

Accuracy, adjustability, energy efficiency and styling in a quality hot water dispenser

11.4L tank

Precise temperature control and hot water on-demand to 100°C

Contemporary, low profile design for front-of-house and self-service

Eco-friendly technology maximizes energy use

Thinsulate® tank insulation improves energy efficiency

Programmable "Energy Saver Mode" reduces operating costs during idle periods

LED display provides simple temperature adjustment

Intuitive blue LED dispense button

Cup clearance accommodates a range of serving options for custom-crafted, hand pour coffees and teas

H3XA with 100C

DESCRIPTION				CAPACITY	ELECTRICAL						AGENCY
				WATER INPUT 15.6°C							
Product #	Model	Dimensions Height x Width x Depth (Centimeters)	Temperature Setting °C	L/hr	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
45300.0000	H3EA Element	49.02 19.3 56.52	96	29.9	220-240	11.5-12.5	2500-3000	50-60	1	UK	CE
45300.0002	H3EA Element	49.02 19.3 56.52	96	29.9	220-240	11.5-12.5	2500-3000	50-60	1	EURO	CE EAC
45300.0004	H3EA Element	49.02 19.3 56.52	96	29.9	220-240	11.5-12.5	2500-3000	50-60	1	KOREA	KC
45300.0009	H3XA Element	49.02 19.3 56.52	96	29.9	220-240	11.5-12.5	2500-3000	50-60	1		

Plumbing: 138-621 kPa. Machine supplied with 1/4" BSPP Male flare fitting.

*Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

Precise Temperature *Medium Volume*

Accuracy, adjustability, energy efficiency and styling in a quality hot water dispenser

18.9L tank

Thinsulate® tank insulation provides increased energy efficiency

LED display provides simple temperature adjustment

Digital thermostat provides consistent and accurate temperatures of 15.6°-100°C

Programmable "Energy Saver Mode" reduces operating cost during idle periods

H5XA Element
(Stainless)

H5XA Element
(White)

H5XA Element
(Black)

DESCRIPTION					CAPACITY	ELECTRICAL							AGENCY
					WATER INPUT 15.6°C								
Product #	Model	Dimensions Height x Width x Depth (Centimeters)	Finish	Temperature Setting °C	L/hr	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
43600.0002	H5XA Element	72.40 18.00 44.50	STAINLESS	100	36.6*	208	19.5	4050	60	1	NO	UL LISTED NSF
43600.0003	H5XA Element	72.40 18.00 44.50	STAINLESS	100	36.6*	240	16.9	4050	60	1	NO	UL LISTED NSF
43600.0013	H5XA Element	72.40 18.00 44.50	STAINLESS	100	36.6*	220-240	15.5-16	3400-3800	50/60	1	EURO	CE EHC
43600.0022	H5XA Element	72.40 18.00 44.50	BLACK	100	36.6*	220-240	15.5-16	3400-3800	50/60	1	EURO	CE EHC
43600.0023	H5XA Element	72.40 18.00 44.50	WHITE	100	36.6*	220-240	15.5-16	3400-3800	50/60	1	EURO	CE EHC
43600.0032	H5XA Element	72.40 18.00 44.50	STAINLESS	100	36.6*	220-240	15.5-16	3400-3800	50/60	1	NO	CE
43600.0035	H5XA Element	72.40 18.00 44.50	STAINLESS	100	36.6*	220-240	15.5-16	3400-3800	50/60	1	NO	CE
43600.0041	H5XA Element	72.40 18.00 44.50	STAINLESS	100	36.6*	220-240	15.5-16	3400-3800	50/60	1	KOREA	KC
43600.0043	H5XA Element	72.40 18.00 44.50	STAINLESS	100	36.6*	220-240	15.5-16	3400-3800	50/60	1	NO	
43600.0046	H5XA Element	72.40 18.00 44.50	STAINLESS	100	36.6*	220-240	15.5-16	3400-3800	50/60	1	CHINA	QS compliant

Plumbing: 138-621 kPa. Machine supplied with 1/4" OD Male flare fitting.

SOLD SEPARATELY

Inlet Hose
32865.1001

Shelf Kit
12599.0000

Wall Bracket Kit, Side Mount
12542.0005

Constant Temperature *Medium Volume*

HW2A
Space-saving machine just 18cm wide to fit any counter

High quality, easy-to-clean stainless steel exterior and tank for a long life

Includes drip tray

H5E/EA PC
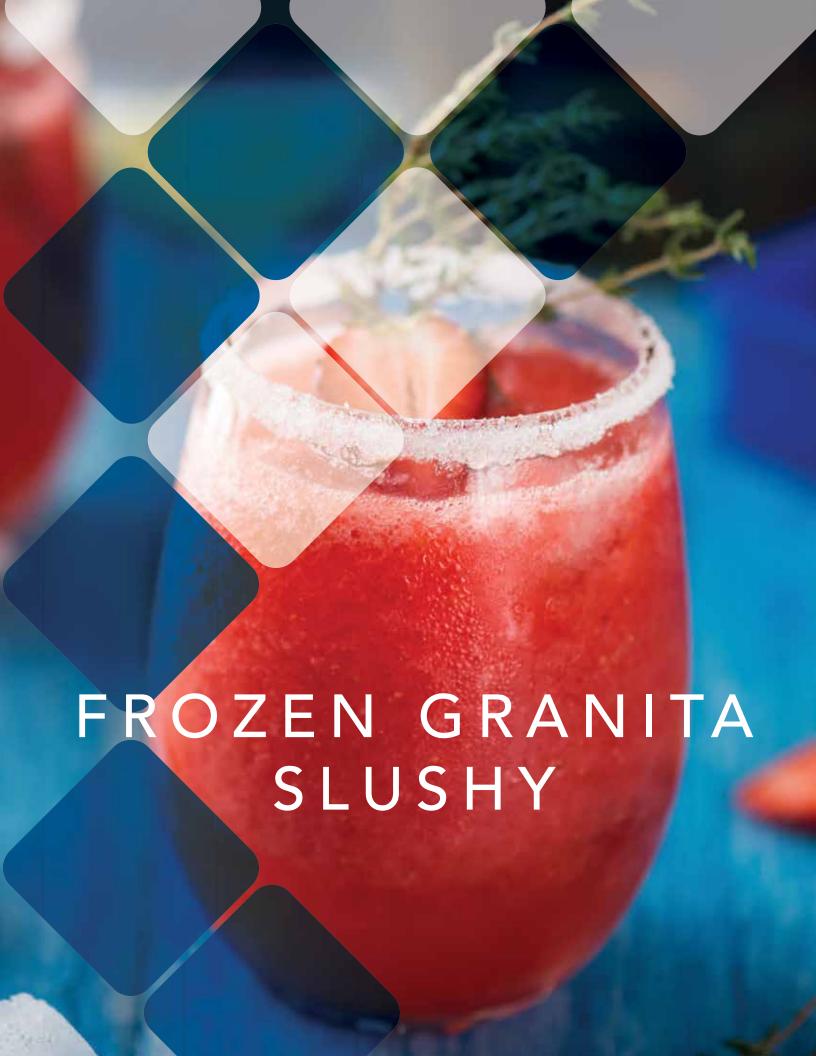Three programmable volume settings and one push and hold continuous dispense button

HW2A

H5E/EA PC

DESCRIPTION					CAPACITY	ELECTRICAL							AGENCY
Product #	Model	Dimensions Height x Width x Depth (Centimeters)			Temperature Setting °C	L/hr	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
02500.0002	HW2A	60.96	18.03	36.32	93.3	19.3	220-240	7.3-7.9	1600-1900	50-60	1	EURO	CE EAC
39100.0003	H5EA PC	72.14	17.78	39.37	18.3-96.1	40.1	220-240	15.5-16	3400-3800	50-60	1	EURO	CE EAC

SOLD SEPARATELY

Inlet Hose Assembly
32865.1001

*Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

FROZEN GRANITA SLUSHY

Ultra® Series

Frozen beverage dispenser with reversing auger technology for superior mixing and freezing

Manual Fill

Two 11.36L hoppers

Pour water and product mix directly into hopper; special plumbing not required

Torque sensor technology maintains consistent product thickness for superior beverages

Reversing auger insures product quality and product presentation in the hopper

High efficiency LED lighting

Ultra-2A

	DESCRIPTION					ELECTRICAL						AGENCY
Product #	Model	Dimensions Height x Width x Depth (Centimeters)			Finish	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
34000.0002	ULTRA-2A	81.28	40.64	62.23	BLACK	220-240	4.7-5.1	1050-1100	50-60	1	EURO	CE NSF
34000.0003	ULTRA-2A	81.28	40.64	62.23	STAINLESS/WHITE	220-240	4.7-5.1	1050-1100	50-60	1	EURO	CE NSF
34000.0573	ULTRA-2A	81.28	40.64	69.85	BLACK	220-240	4.7-5.1	1050-1100	50-60	1	No	CE NSF

SOLD SEPARATELY

ULTRA-2 Hopper Group
34000.0402, 34000.0403

*Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

Ultra® Series

Frozen beverage dispenser with reversing auger technology for superior mixing and freezing

Two 11.36L hoppers

High efficiency LED lighting

Torque sensor technology maintains consistent product thickness for superior beverages

Reversing auger insures product quality and product presentation in the hopper

Liquid Autofill

Liquid Autofill product hoppers automatically replenish

Designed to be used with Brix Pumps

CF Valve Autofill

Constant flow control for accurate brixing of product; Internal brixing allows interface with standard BIB pumping

Ultra-2A

DESCRIPTION							ELECTRICAL						AGENCY
Product #	Model	Dimensions Height x Width x Depth (Centimeters)			Finish	CF Valve	Volts	Amps	Watts	Hertz	Phase	Plug	Listing
34000.0066	ULTRA-2A Liquid Autofill	81.28	40.64	62.23	BLACK	NO	220-240	4.7-5.1	1050-1100	50-60	1	EURO	CE
34000.0557	ULTRA-2A CFV Liquid Autofill	81.28	40.64	62.23	BLACK	YES	220-240	4.7-5.1	1050-1100	50-60	1	EURO	CE

Plumbing: 138-621 kPa. Machines supplied with ¼" Male flare fitting. All plumbed models that are CE listed feature backflow prevention.

SERVING
& HOLDING

ThermoFresh® Digital Gauge Servers

Holds temperature for hours without traditional warming plates

TF Server

Digital timer begins to count up in one minute increments to specifically display how long the brewed beverage has been stored; requires four AAA batteries; display shows low battery symbol

Brew-thru lid design also features a pour spout for easy emptying and cleaning

TF Server without Stand

Ideal with Infusion Series® Coffee Brewer (ICB)

TF Server Stand

Use for easy dispensing; 17.9cm cup clearance

Built-in drip tray is easily removed for cleaning or providing extra clearance for large vessels

3.8L TF Server
without Stand

TF Server Stand

3.8L TF Server
(Stand included)

		DIGITAL GUAGE SERVERS						
Product #	Model	Dimensions Height x Width x Depth (Centimeters)			Holding Capacity	Includes Stand	Finish	Compatible Brewers	Agency
42700.0200	TF Server DSG3	52.58	23.62	33.02	3.8L	YES	STAINLESS/ BLACK	Single TF DBC, Dual TF DBC, ITCB, ITCB HV
42750.0200	TF Server DSG3	57.66	23.62	33.02	5.7L	YES	STAINLESS/ BLACK	
42700.0250	TF Server DSG3	32.00	23.11	32.26	3.8L	NO	STAINLESS/ BLACK	ICB ICB Twin	NSF
42750.0250	TF Server DSG3	37.34	23.11	32.26	5.7L	NO	STAINLESS/ BLACK	
54473.1000	TF Server Stand	24.64	23.50	33.02	N/A	N/A	BLACK	TF Servers Without Stand

ThermoFresh® Mechanical Gauge Servers

Holds temperature for hours without traditional warming plates

TF Server
Glass sight gauge on front of server allows for visible indication of level capacity

Brew-thru lid design also features a pour spout for easy emptying and cleaning

Translucent faucet guard for visibility while dispensing

TF Server without stand
Ideal with Infusion Series® Coffee Brewer (ICB)

TF server stand
Use for easy dispensing; 17.9cm cup clearance

Built-in drip tray is easily removed for cleaning or providing extra clearance for large vessels

TITAN TF SERVER
11.4L or 5.7L capacity

Insulated and portable

Large cup clearance for a variety of dispensing options

3.8L TF Server without Stand	TF Server Stand	TF Server Stand	5.7L TF Server (Stand included)

MECHANICAL GAUGE SERVERS

Product #	Model	Dimensions Height x Width x Depth (Centimeters)			Holding Capacity	Includes Stand	Finish	Compatible Brewers	Agency
44000.0200	TF SERVER	52.83	23.62	33.02	3.8L	YES	STAINLESS/ BLACK		
44000.0201	TF SERVER WITH TIMER	52.83	23.62	33.02	3.8L	YES	STAINLESS/ BLACK	SINGLE TF DBC DUAL TF DBC, ITCB ITCB HV	
44050.0200	TF SERVER	52.83	23.62	33.02	5.7L	YES	STAINLESS/ BLACK		
44050.0203	TF SERVER	58.17	23.62	33.02	5.7L	YES	BLACK		
44000.0250	TF SERVER	32.04	23.11	30.15	3.8L	NO	STAINLESS/ BLACK		NSF
44050.0250	TF SERVER	37.30	23.11	30.15	5.7L	NO	STAINLESS/ BLACK	ICB ICB TWIN	
44050.0251	TF SERVER	37.30	23.11	30.15	5.7L	N/A	BLACK		
46300.0000	TITAN TF SERVER	58.2	29.7	38.9	5.7L	N/A	STAINLESS	TF, ICB SERVERS	
54473.1000	TF SERVER STAND	24.64	23.50	33.02	N/A	N/A	BLACK	N/A	
39400.0001	TITAN TF SERVER	60.2	35.1	43.9	N/A	N/A	STAINLESS	TITAN	

*Capacity based on equipment voltage of 230V

Infusion Series® Soft Heat® Server System

BUNN-exclusive Soft Heat technology supplies controlled heat to the brewed coffee within the server whenever it's docked on the brewer, ensuring ideal holding temperatures and optimal flavor for longer periods

SH Server

5.7L capacity; choose from five optional holding time settings

Safety-Fresh® brew-thru lid with vapor seal and spill prevention

Soft grip handle for secure portability

SH Docking Station

Remote one and two server docking stations with 10.2cm legs

Instant power contact with servers

Add additional remote stations to increase volume

2SH Docking Station

1 SH Server and Docking Station

DESCRIPTION						ELECTRICAL
Product #	Model	Finish	Dimensions Height x Width x Depth (Centimeters)			Volts
27850.0200	INFUSION SERIES® 5.7L SH SERVER	BLACK/STAINLESS	36.70	23.00	33.70	N/A
27850.0213	INFUSION SERIES® 5.7L SH SERVER	BLACK	36.70	23.00	33.70	N/A
27825.0300	INFUSION SERIES® 1SH DOCKING STAND	STAINLESS	23.62	25.91	29.97	220-240
27875.0300	INFUSION SERIES® 2SH DOCKING STAND	STAINLESS	23.62	51.31	29.97	220-240

Soft Heat® Server System

BUNN-exclusive Soft Heat technology supplies controlled heat to the brewed coffee within the server whenever it's docked on the brewer, ensuring ideal holding temperatures and optimal flavor for longer periods

SH Server
5.7L capacity; choose from five optional holding time settings

Soft grip "bail" handle for secure portability

SH Docking Station
Remote one and two server docking stations with 10.2cm legs

Instant power contact with servers

Add additional remote stations to increase volume

2SH Docking Station

1 SH Server and Docking Station

SOFT HEAT SERVER SYSTEMS															
Product #	**MODEL**	**Dimensions Height x Width x Depth (Centimeters)**			**Holding Capacity**	**Setting**	**Finish**	**Volts**	**Amps**	**Watts**	**Hertz**	**Phase**	**Plug**	**Compatible Brewers**	**Agency**
27850.0001	SH SERVER	42.16	21.59	35.56	5.7L	N/A	STAINLESS/ BLACK								
27850.0004	SH SERVER	42.16	21.59	35.56	5.7L	N/A	BLACK								
27850.0006	SH SERVER	42.16	21.59	35.56	5.7L	45 MIN	STAINLESS/ BLACK								
27850.0008	SH SERVER	42.16	21.59	35.56	5.7L	60 MIN	BLACK								
27850.0009	SH SERVER	42.16	21.59	35.56	5.7L	120 MIN	STAINLESS/ BLACK							SINGLE SH DBC DUAL SH DBC SINGLE SH DUAL SH	NSF. UL LISTED
27850.0016	SH SERVER	42.16	21.59	35.56	5.7L	240 MIN	STAINLESS		N/A						
27850.0022	SH SERVER	42.16	21.59	35.56	5.7L	120 MIN	BLACK								
27850.0023	SH SERVER	42.16	21.59	35.56	5.7L	N/A	STAINLESS/ BLACK								
27850.0026	SH SERVER	42.16	21.59	35.56	5.7L	90 MIN	BLACK								
27850.0027	SH SERVER	42.16	21.59	35.56	5.7L	120 MIN	STAINLESS/ BLACK								
27850.0035	SH SERVER	42.16	21.59	35.56	5.7L	N/A	STAINLESS								
27850.0046	SH SERVER	42.16	21.59	35.56	3.8L	60 MIN	STAINLESS/ BLACK								
27850.0047	SH SERVER	42.16	21.59	35.56	5.7L	120 MIN	BLACK								
27825.0001	1SH DOCKING STATIONS	34.42	25.65	33.53	1 SH SERVER	N/A	STAINLESS	220-240	0.33-0.36	70-85	50-60	1	EURO	1 SH SERVER	
27825.0002	1SH DOCKING STATIONS	34.42	25.65	33.53	1 SH SERVER	N/A	STAINLESS	220-240	0.33-0.36	70-85	50-60	1	UK	1 SH SERVER	CE NSF.

CE NSF.

*Capacity based on equipment voltage of 230V

Thermal Carafes, Pitchers and Airpots

Thermal Carafe
Highly durable stainless steel interior and exterior

Thermal Pitcher
Stainless steel lining ensures hot coffee for hours

Push Button Airpot
Brew-thru pump Assembly - no need to remove for brewing

Lever-Action Airpot
Brew-thu lid with lever-action for easy use

Vacuum
Pitcher

Lever-Action
Airpot

Push-Button
Airpot

Seamless Thermal
Carafe

Thermal
Carafe

CARAFES							
Product #	Model	Capacity	Liner	Lid Color	Quantity per Case	Compatible Brewers	Agency
36029.0001	DELUXE THERMAL CARAFE	1.9L	STAINLESS STEEL	BLACK	1		
36029.0000	DELUXE THERMAL CARAFE	1.9L	STAINLESS STEEL	BLACK	12		
36252.0001	DELUXE THERMAL CARAFE	1.9L	STAINLESS STEEL	ORANGE	1		
36252.0000	DELUXE THERMAL CARAFE	1.9L	STAINLESS STEEL	ORANGE	12	SMARTWAVE CWTF-TC	NSF
51746.0001	SEAMLESS THERMAL CARAFE	1.9L	STAINLESS STEEL	BLACK	1		
51746.0101	SEAMLESS THERMAL CARAFE	1.9L	STAINLESS STEEL	BLACK	12		
51746.0006	SEAMLESS THERMAL CARAFE	1.9L	STAINLESS STEEL	ORANGE	1		
51746.0007	SEAMLESS THERMAL CARAFE	1.9L	STAINLESS STEEL	GREEN	1		

PITCHERS						
Product #	Model	Capacity	Liner	Quantity per Case	Brewers	Agency
39430.0000	VACUUM	1.9L	STAINLESS STEEL	1	SMARTWAVE	NSF
39430.0100	VACUUM	1.9L	STAINLESS STEEL	6	SMARTWAVE	

AIRPOTS						
Product #	Model	Capacity	Liner	Quantity per Case	Brewers	Agency
28696.0002	PUSH-BUTTON	2.2L	GLASS	1		
28696.0006	PUSH-BUTTON	2.2L	GLASS	6		
13041.0001	PUSH-BUTTON	2.5L	GLASS	1		ETL Intertek
13041.0101	PUSH-BUTTON	2.5L	GLASS	6		
32700.0000	LEVER-ACTION	2.2L	GLASS	6	CW-APS ICB ICB TWIN SMARTWAVE CWTF-APS CWTF TWIN APS ITCB AXIOM APS	
32125.0000	LEVER-ACTION	2.5L	STAINLESS STEEL	1		
32125.0100	LEVER-ACTION	2.5L	STAINLESS STEEL	6		
32130.0000	LEVER-ACTION	3L	STAINLESS STEEL	1		NSF
32130.0100	LEVER-ACTION	3L	STAINLESS STEEL	6		
36725.0000	LEVER-ACTION	3.8L	STAINLESS STEEL	1		
36725.0100	LEVER-ACTION	3.8L	STAINLESS STEEL	6		

Universal Airpot Racks

Versatile merchandising system for airpots

Displays can be combined or taken apart easily for greater flexibility

Sturdy, carbon-steel wire construction with vinyl coating resists corrosion, easy to clean

Configurations available for two to six airpots

UNIV-3 APR

UNIV-4 APR

UNIV-2 APR

AIRPOT RACKS					
Product #	**Model**	**Dimensions** **Height x Width x Depth** **(Centimeters)**			**Capacity**
35728.0000	UNIV-2 APR (1 Upper, 1 Lower)	35.81	19.05	61.21	TWO AIRPOTS
35728.0001	UNIV-2 APR (2 Lower)	17.53	37.85	28.45	TWO AIRPOTS
35728.0002	UNIV-3 APR (3 Lower)	17.53	58.17	28.45	THREE AIRPOTS
35728.0003	UNIV-4 APR (2 Upper, 2 Lower)	35.56	37.85	63.25	FOUR AIRPOTS
35728.0004	UNIV-5 APR (3 Upper, 2 Lower)	35.56	58.17	63.25	FIVE AIRPOTS
35728.0005	UNIV-6 APR (3 Upper, 3 Lower)	35.56	58.17	63.25	SIX AIRPOTS

Iced Tea and Iced Coffee Dispensers

Solid stainless construction stands up to demands of foodservice environments

Sump dispense valves assure complete dispensing of beverage

Variety of shapes and sizes for every counter configuration

Oval   TD3T-N   Narrow   Square

Product #	Model	Capacity	Handles	Additional Feature	Brewers	Agency
NARROW						
39600.0001	TDO-N-3.5	13.2L	FRONT/BACK	STANDARD FAUCET, SOLID LID		
39600.0031	TDO-N-3.5	13.2L	FRONT/BACK	LIFT HANDLE, SOLID LID		
39600.0002	TDO-N-4.0	15.1L	FRONT/BACK	STANDARD FAUCET, SOLID LID		
43900.0001	TD3T-N	11.4L	FRONT/BACK	LIFT HANDLE, BREW-THRU LID		
43900.0002	TD3T-N	11.4L	FRONT/BACK	LIFT HANDLE, SOLID LID	TALL MODELS W/ 73.66CM TRUNK: TB3, ITCB, ITCB HV	NSF.
39600.0047	TDO-N-3.5	13.2L	FRONT/BACK	PINCH TUBE, SOLID LID		
39600.0059	TDO-N-3.5	13.2L	FRONT/BACK	PINCH TUBE, SOLID LID		
39600.0081	TDO-N-3.5	13.2L	FRONT/BACK	STANDARD FAUCET BREW-THRU LID		
39600.0083	TDO-N-3.5	13.2L	FRONT/BACK	BREW-THRU LID, PINCH TUBE		
39600.0065	TDO-N-3.5	13.2L	FRONT/BACK	HEM	SHORT MODELS W/ 65.41CM TRUNK: TB3, ITCB	
39600.0066	TDO-N-2.0	7.8L	FRONT/BACK	HEM		
SQUARE						
03250.0003	TD4	15.1L	SIDE	SOLID LID	SHORT MODELS W/ 65.41CM TRUNK: TB3, ITCB	
03250.0006	TD4T	15.1L	SIDE	BREW-THRU LID		
03250.0005	TD4T	15.1L	SIDE	BREW-THRU LID, TALL		
03250.0018	TD4T	15.1L	SIDE	BREW-THRU LID, TALL, NO DECAL	TALL MODELS W/ 73.66CM TRUNK: TB3, ITCB, ITCB HV	NSF.
03250.0004	TD4T	15.1L	SIDE	SOLID LID, NUDGER HANDLE		
CYLINDER - ROUND						
33000.0000	TDS-3	11.4L	SIDE	STAINLESS LID		
33000.0023	TDS-3.5	13.2L	SIDE	STAINLESS LID	TB3 ITCB ITCB HV	
33000.0001	TDS-5	18.9L	SIDE	STAINLESS LID		
CYLINDER - OVAL						NSF.
34100.0000	TDO-4	15L	SIDE	SOLID, PLASTIC LID		
34100.0002	TDO-4	15L	SIDE	BREW-THRU PLASTIC LID	TB3 ICB ITCB DV	
34100.0001	TDO-5	18.9L	SIDE	SOLID, PLASTIC LID		
34100.0003	TDO-5	18.9L	SIDE	BREW-THRU PLASTIC LID		
37100.0000	TDO-3.5 LP	13.2L	SIDE	BREW-THRU PLASTIC LID		NSF.
34100.0007	TDO-4	15L	SIDE	SOLID PLASTIC LID		
34100.0011	TDO-4	18.9L	SIDE	SOLID, PLASTIC LID WITH BREW THRU OPTION		
34100.0030	TDO-4	18.9L	SIDE	PINCH TUBE FAUCET		

Coffee Decanters

EASY POUR®

BUNN® exclusive design; high quality stainless steel base with drip proof, fast-pour lip

Clear, impact-resistant material complies with FDA regulations for food contact

Glass decanters

Reliable, shatter-resistant, and perfectly balanced with laboratory-grade, stress-free glass

Glass

Easy Pour®

Stainless Steel

DECANTERS						
Product #	Model	Capacity	Handle Color	Quantity Per Case	Brewers	Agency
06100.0101	EASY POUR	1.9L	BLACK	1		
06100.0102	EASY POUR	1.9L	BLACK	2		
06100.0103	EASY POUR	1.9L	BLACK	3		
06100.0106	EASY POUR	1.9L	BLACK	6		
06100.0112	EASY POUR	1.9L	BLACK	12		
06100.0124	EASY POUR	1.9L	BLACK	24		
06100.0401	EASY POUR with RFID	1.9L	BLACK	24		
06101.0101	EASY POUR	1.9L	ORANGE	1		
06101.0102	EASY POUR	1.9L	ORANGE	2		
06101.0103	EASY POUR	1.9L	ORANGE	3	Decanter Brewers	
06101.0124	EASY POUR	1.9L	ORANGE	24	VP17	
42400.0024	GLASS	1.9L	BLACK	24	AXIOM	
42400.0101	GLASS	1.9L	BLACK	1	CW	
42400.0103	GLASS	1.9L	BLACK	3		
42400.0203	GLASS with RFID	1.9L	BLACK	3		
42401.0024	GLASS	1.9L	ORANGE	24		
42401.0101	GLASS	1.9L	ORANGE	1		
42401.0103	GLASS	1.9L	ORANGE	3		
42401.0203	GLASS with RFID	1.9L	ORANGE	3		
06026.0000	STAINLESS	1.9L	BLACK	1		

PAPER
FILTERS

Paper Filters

Selection of coffee filters is a vital step in brewing perfect coffee - don't settle for anything less than BUNN® quality coffee filters. Using the results of years of research, BUNN manufactures the best filters from high quality, heavy weight paper, so the water flows properly through the coffee. Our filters are uniquely designed for strength with taller walls to help reduce overflow and grounds in your coffee.

BUNN's paper stock used in the manufacturing of our coffee filters is produced using an elemental chlorine-free (ECF) bleaching method.

BUNN Paper Filter materials meet:

Restrictive limits as stated in Resolution ResAP(2002)1 on paper and board materials intended to come into contact with foodstuff.

Compositional and end product requirements stated in the Dutch legislation "Regeling Verpakkingen en gebruiksartikelen, Chapter II, Paper and board, pt 2 Paper and board used as cooking paper and for filtering above 80°C".

Limits stated in the German recommendation BfR XXXVI Paper and board for food contact and the special requirements in BfR XXXVI/1 for Cooking Papers, hot filter papers and filter layers.

Product #	Filter Type	Description	Number per Bag	Bags per Case	Number Cluster	Overall Measure x Base Diameter (millimetres)	Packed per Case	Case Weight (kg)	Cases per Skid/Tier
20115.0000	DECANTER FILTERS	REGULAR C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	247.65 x 107.95	1000	1.91	180/15
20122.0000		REGULAR FAST FLOW C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	247.65 x 107.95	1000	2.04	180/15
20109.0000		URN - U3, SRU, IC-3	252	1	36	450.85 x 184.15	252	2.49	88/11
20124.0000		URN, 11.4L	252	1	36	482.6 x 184.15	252	2.77	88/11
20111.0000	URN FILTERS	TITAN, URN	252	1	36	508 x 196.85	252	2.99	84/12
20125.0000		URN, 22.7L	250	1	25	533.4 x 222.25	250	3.4	72/9
20113.0000		URN, 37.9L	250	1	25	603.25 x 222.25	250	4.22	54/9
20131.0000		URN, 37.9L	252	1	36	615.95 x 273.05	252	4.40	36/6
20120.0000		SYSTEM III	252	2	36	384.18 x 136.53	504	3.86	108/12
20100.0000	OTHER FILTERS	TEA BREWERS, SINGLE & DUAL COFFEE BREWERS, 5..7L URNS, ITCB, SYSTEM II	500	1	50	323.85 x 133.35	500	2.13	150/15
20157.0001		GOURMET C FUNNEL	500	2	50	349.25 x 133.35	1000	3.74	60
20138.1000		GOURMET, SINGLE TF, DUAL TF, SINGLE SH, DUAL SH, SINGLE, DUAL, 5.7L URNS	500	1	36	349.25 x 133.35	504	2.49	108/12

ACCESSORIES

Accessories and Cleaning Agents

Cleaning Tablets

	CLEANING AGENTS AND ACCESSORIES	
Part #	Model	Quantity Per Case
29875.0000	FLOWJET® SYSTEM	ONE
24634.0000	KAY-5 SANITIZER	200 PACKETS
24634.0001	KAY-5 SANITIZER	50 PACKETS
36000.1188	CAFIZA CLEANING TABLETS	TWELVE CONTAINERS
36000.1189	CAFIZA CLEANING TABLETS (100 COUNT)	ONE CONTAINER
37306.0000	URNEX DESCALER	ONE 1OZ PACKET
39159.0000	GRINDZ GRINDER CLEANER	ONE CONTAINER
39159.0001	GRINDZ GRINDER CLEANER	TWELVE BOTTLES
39265.0000	SURE TAMP® STEAM RINZA MILK CLEANER	ONE BOTTLE
39265.0001	SURE TAMP STEAM RINZA MILK CLEANER	SIX BOTTLES
39302.0000	REFILLABLE CONTAINER ASSEMBLY	ONE
39637.0000	TABZ BREWER CLEANER	ONE CONTAINER
39637.0001	TABZ BREWER CLEANER	TWELVE CONTAINERS
55605.0000	CAFIZA -CRESCENDO- CLEANING TABLETS (32/BOX)	ONE
40199.0001	SURE TAMP AUTO RINZA MILK CLEANING TABLETS	ONE
50766.0001	SURE IMMERSION FILTER PAPER	ONE ROLL
42933.0001	SURE IMMERSION CLEANING TABLET	ONE JAR

*Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

Stock Funnels

URN FUNNEL

PRODUCT NUMBER   07022.0012

For use with U3 brewers

BLACK PLASTIC SPLASHGARD® FUNNEL WITH DECALS

PRODUCT NUMBER   20583.0003

For use with CDBC, CWT, AXIOM®, Smart WAVE® Brewers

PRODUCT NUMBER   29351.0001

*For use with O, R, CDBD Twin, CWT Twin and AXIOM® Twin Brewers*

BLACK PLASTIC ITCB FUNNEL

PRODUCT NUMBER   53463.0008

For use when brewing coffee with new Infusion Series® ITB and ITCB Brewers

STAINLESS STEEL SPLASHGARD® FUNNEL

PRODUCT NUMBER   20216.0000

For use with CDBC, CWT AXIOM® and Smart WAVE® brewers

PRODUCT NUMBER   20217.0000

For use with O, R, CDBC Twin, CWT Twin and AXIOM® brewers

STAINLESS STEEL SINGLE/DUAL FUNNEL

PRODUCT NUMBER   20201.1201

For use with older Single®, Dual®, and Soft Heat® brewers

SMART FUNNEL®

PRODUCT NUMBER   32643.0000

Standard w/ bypass

PRODUCT NUMBER   32643.0010

w/D-Ring basket

For use with older BrewWISE®, ThermoFresh®, Soft Heat®, DBC® and ICB brewers

SST PLATINUM FUNNEL

PRODUCT NUMBER   54675.0008

For use with new Infusion Series® Brewers

TITAN® FUNNEL

PRODUCT NUMBER   40114.0000

For use with Titan® brewers

GOURMET C FUNNEL

PRODUCT NUMBER   34559.0000

For use with CDBC, CWT AXIOM® and SmartWAVE® APS and TC brewers

PRODUCT NUMBER   34559.0001

For use with CDBC Twin, CWT Twin and AXIOM® Twin and TC brewers

Universal design – handle may be moved to appropriate side

Allows brewing heavier throw weights

PRODUCT NUMBER   34559.0003

For use with older ITCB

TRANSLUCENT COFFEE FUNNEL

PRODUCT NUMBER   20583.0002

For use with VP and CWTF brewers

PRODUCT NUMBER   29351.0000

For use with O, R, CDBC Twin, CWT Twin and AXIOM®ᵛ Twin brewers

TRANSLUCENT TEA FUNNEL

PRODUCT NUMBER   03021.0016

For use with SmartWAVE® brewer

TRANSLUCENT TEA FUNNEL

PRODUCT NUMBER   03021.0004

For use with TB3, TU3, and older ITCB brewers

PRODUCT NUMBER   03021.0005 (Quick Dispense)

For use with TB3Q, TU3Q, and older ITB brewers

TRANSLUCENT DUAL DILUTION TEA FUNNEL

PRODUCT NUMBER   03021.0013

For use with TB6 brewer

PRODUCT NUMBER   03021.0014

For use with TB6Q brewer

TRANSLUCENT TEA FUNNEL

PRODUCT NUMBER   53463.0010

For use with new Infusion Series® ITCB Brewers

Special Purpose Funnels

TRANSLUCENT POUCH PACK FUNNEL

PRODUCT NUMBER   35282.0001

FOR USE WITH TU3Q BREWER

PRODUCT NUMBER   35282.0002

FOR USE WITH TU3 AND TB3 BREWERS

USE WITH RECTANGULAR TEA POUCH PACK

POUCH PACK FUNNEL FOR SATELLITE BREWERS

PRODUCT NUMBER   35282.0000

FOR USE WITH OLDER SINGLE AND DUAL SH BREWERS

POUCH PACK FUNNEL FOR SATELLITE BREWERS

PRODUCT NUMBER   29151.0000
BLACK HANDLE

PRODUCT NUMBER   29151.0001
ORANGE HANDLE

*INTERCHANGEABLE HANDLE ALLOWS USE WILL
ALL BUNN DECANTER BREWERS*

POUCH PACK FUNNEL FOR SMALL BREW CHAMBER BREWERS

PRODUCT NUMBER   02073.0010

FOR USE WITH O AND R BREWERS

PRODUCT NUMBER   02774.0010 BROWN

PRODUCT NUMBER   02774.0011 BLACK

FOR USE WITH VP AND CWTF BREWERS

POUCH PACK FUNNEL FOR LARGE BREW CHAMBER BREWERS

PRODUCT NUMBER   02074.0010

FOR USE WITH O AND R BREWERS

PRODUCT NUMBER   04274.0010 BROWN

PRODUCT NUMBER   04274.0012 BLACK

FOR USE WITH VP AND CWTF BREWERS

NOTE: Only funnels #35282.0001, #35282.0002, and #35282.0000 on this page are designed with SplashGard® to help deflect hot liquids away from the hand.

Drip Trays *Coffee*

INFUSION SERIES® SH BREWERS AND SH STAND

PRODUCT NUMBER   53452.0001

RWS1 WARMER

PRODUCT NUMBER   20213.0103

INFUSION SERIES® TWIN SH BREWERS AND 2 SH STAND

PRODUCT NUMBER   53452.0000

DUAL® BREWERS

PRODUCT NUMBER   20213.0101

LCR-3 HV

PRODUCT NUMBER   41656.0000

AIRPOT RACK

PRODUCT NUMBER   25368.0000 TRAY

PRODUCT NUMBER   25367.0000 TRAY LINER

THERMOFRESH SERVER®

PRODUCT NUMBER   38931.0000 TRAY

PRODUCT NUMBER   38932.0000 TRAY COVER

U3 COFFEE URN

PRODUCT NUMBER   07284.0000

*Capacity based on equipment voltage of 230V

For additional product specifications and images visit bunn.com.

Drip Trays *Dispensed Water*

HW2, H5M, and H5X	
PRODUCT NUMBER	02497.0000

OHW	
PRODUCT NUMBER	02497.0001

Drip Trays *Tea*

TCD AND TDO	
PRODUCT NUMBER	38029.1000

TDO-N	
PRODUCT NUMBER	39626.0000 TRAY
PRODUCT NUMBER	39627.0000 TRAY COVER

Drip Trays *Hot Dispensed*

FMD-1 AND FMD-2	
PRODUCT NUMBER	02571.0000 TRAY
PRODUCT NUMBER	28966.0000 TRAY COVER

FMD-3	
PRODUCT NUMBER	28699.0000 TRAY
PRODUCT NUMBER	28267.0000 TRAY COVER

FMD-4 AND FMD-5	
PRODUCT NUMBER	34716.0000 TRAY
PRODUCT NUMBER	34717.0000 TRAY COVER

IMIX-3	
PRODUCT NUMBER	36984.0000 TRAY
PRODUCT NUMBER	36985.0000 TRAY COVER

IMIX-4 AND IMIX-5	
PRODUCT NUMBER	36670.0000 TRAY
PRODUCT NUMBER	36739.0000 TRAY COVER

Drip Trays *Cold Dispensed*

JDF-2S	
PRODUCT NUMBER	38765.1000

JDF-2S/NITRON EXTENDED	
PRODUCT NUMBER	44015.1000
INCREASES CUP CLEARANCE TO 10.25"	

JDF-4S AND LCR-3	
PRODUCT NUMBER	38764.1001

JDF-4S EXTENDED	
PRODUCT NUMBER	40789.1000
INCREASES CUP CLEARANCE TO 10.25"	

Drip Trays *Frozen Dispensed*

ULTRA-2 WHITE	
PRODUCT NUMBER	28086.0000 TRAY
PRODUCT NUMBER	32068.0000 TRAY COVER

ULTRA-2 BLACK	
PRODUCT NUMBER	28086.0001 TRAY
PRODUCT NUMBER	32068.0001 TRAY COVER

Nitron$_2$® *Accessories*

REFILLABLE CONTAINER ASSEMBLY	
PRODUCT NUMBER	39302.0000

NITRON SCHOLLE QUICK CONNECT	
PRODUCT NUMBER	55324.0000

NITRON SCHOLLE QUICK CONNECT	
PRODUCT NUMBER	55325.0000

Clean Contact Solutions

ANTI-MICROBIAL FILM

Covers your common contact points and allow your equipment to function normally and won't leave a sticky residue when replaced. EPA registered and NSF approved for food and water contact

ANTI-MICROBIAL PARTS

Anti-microbial replacement parts for high-frequency contact points such as faucets, handles and dispense membrane switches. Please contact your BUNN Sales representative for availability.

FAUCET ADAPTERS

Your existing equipment and servers can be part of a clean contact beverage program. Stainless-steel faucet adapters attach to BUNN Soft Heat®, ThermoFresh®, and tea dispensers, allowing for easy cup-push service.

PUSH-STYLE FAUCETS

BUNN servers, new or old, can be outfitted with push-style faucets that emphasize clean contact. These faucets are easy to install and require little effort to dispense.

TAP-KINS™

Tap-Kins are biodegradable and recyclable sleeves that users can easily take from a dispenser, slide over any handle, and discard without any direct surface contact.

ANTI MICROBIOAL FILM		DESCRIPTION			
Product #	**Model**	**Count**	**Dimensions** **Height x Width (Inches)**		
57460.0000	ANTI-MICROBIAL FILM	50 pack	9.0	12.0	
57460.1002	ANTI-MICROBIAL FILM	10 pack	1.0	1.0	
57460.1003	ANTI-MICROBIAL FILM	10 pack	4.0	4.0	
57460.1004	ANTI-MICROBIAL FILM	10 pack	2.25	5	
FAUCET ADAPTERS		**DESCRIPTION**			
Product #	**Model**	**Finish**	**Dimensions** **Height x Width x Depth (Inches)**		
57483.0000	PLASTIC FAUCET PUSH HANDLE	BLACK	5.5	2.3	1.5
57516.0000	PINCH TUBE FAUCET ADAPTER	STAINLESS			
FAUCET ADAPTERS		**DESCRIPTION**			
Product #	**Model**		**Finish**		
57480.0000	SST ADAPTER		STAINLESS		
57514.0000	SST ADAPTER WITH PEDAL HANDLE		STAINLESS		
57509.0000	SST ADAPTER WITH WIRE FORM		STAINLESS		
TAP-KINS™ ADAPTERS		**DESCRIPTION**			
Product #	**Model**	**Finish**	**Dimensions** **Height x Width x Depth (Inches)**		
57472.0000	TAP-KINS™ DISPENSER	BLACK	7.25	3.5	8.9
57473.0000	TAP-KINS™ SLEEVES	BIODEGRADABLE			

*Capacity based on equipment voltage of 230V

VirtualTOUCH™

A Touchless Beverage Selection & Dispensing Solution

VirtualTOUCH FOR SURE IMMERSION

Touchless coffee experience via smartphone.

Access to full beverage menu with intuitive step-by-step instructions to reduce shared contact points

Powered by BUNNlink®, a cloud-based solution (BUNNlink hardware and annual subscription required. Contact your BUNN sales rep for more information.)

VirtualTOUCH FOR CRESCENDO

The operator selects and dispenses a beverage by hovering a fingertip in front of a selection button without touching the machine.

VirtualTOUCH®
ready

Sure Immersion® 220

VirtualTOUCH®
ready

Crescendo®

DESCRIPTION				CAPACITY	ELECTRICAL						
Product #	Model	Dimensions Height x Width x Depth (Centimeters)		8oz cups/hr 296mL cups/hr	Volts	Amps	Watts	Hertz	Phase	Plug	Agency
44400.0106	SURE IMMERSION 220	100 40.9 50.3		63	100	13	1300	50/60	1	NO	
44400.0108	SURE IMMERSION 220	100 40.9 50.3		63	200	12	2400	50/60	1	NO	

DESCRIPTION				CAPACITY	ELECTRICAL						
Product #	Model	Dimensions Height x Width x Depth (Centimeters)		Shots/hr	Volts	Amps	Watts	Hertz	Phase	Plug	Agency
44300.0200	CRESCENDO	79.40 35.90 49.90		40	220-240	11.5-12.2	2500-2900	50hz	1	EURO	CE
44300.0202	CRESCENDO	79.40 35.90 49.90		40	220-240	11.5-12.2	2500-2900	50hz	1	NO	CE
44300.0213	CRESCENDO	79.40 35.90 49.90		40	220-240	11.5-12.2	2500-2900	50hz	1	UK	CE
44300.0215	CRESCENDO	79.40 35.90 49.90		40	220-240	11.5-12.2	2500-2900	60hz	1	KOREA	KC

Plumbing: 20-90 PSI. Machine supplied with garden hose fitting.

SALES | SERVICE | SUPPORT OFFICES

CORPORATE OFFICES
5020 Ash Grove Dr
Springfield, Illinois 62711 USA
(800) 637-8606 or
(+1) 217-529-6601

BUNN (SHANGHAI) TRADING CO
CHINA OFFICE
Room A208 - 209
No. 1618, Yishan Road, Minhang District
Shanghai, China 201103
+86 (21) 8036 1968
Fax: +86 (21) 6432 0210

SALES | SERVICE | SUPPORT CONTACTS

Lina Chiodo
SVP International Sales
Office: (+1) 416-233-1200
UK office: +44 (0) 121 745 8104
Mobile: (+1) 647-998-4809
Fax (+1) 217 585 7390
lina.chiodo@bunn.com

CheeWu Ho
VP Sales & Marketing
Asia Pacific
Mobile: (+65) 97327006
Fax: (+65) 63967708
cheewu.ho@bunn.com

Alan Xu
Regional Sales Manager
Greater China
Office: (+86) 21-80361968
Mobile: (+86) 13-701785632
Fax: (+86) 21-64320210
alan.xu@bunn.com

Yan Chen
Regional Sales Manager
China & Asia
Mobile: (+86) 13810244746
yan.chen@bunn.com

Josephine Cobero
Regional Sales Manager
South East Asia & Oceania
Mobile: (+63) 9988526260
josephine.cobero@bunn.com

Morifumi Murayama
Regional Sales Manager
Japan
Mobile: (+81) 8040050129
morifumi.murayama@bunn.com

Andy Chang
Regional Technical Manager
South East Asia & Oceania
Mobile: (+65) 96226234
andy.chang@bunn.com

Walter Sun
Technical Manager
Asia Pacific
Office: (+86) 2180361968
Mobile: (+86) 13916606037
Fax: (+86) 21 64320210
walter.sun@bunn.com

Soohwan Kim
Regional Technical Manager
Japan & Korea
Mobile: (+81) 8095008138
soohwan.kim@bunn.com

Thomas Wang
Quality Manager BAPO
China
Office: (+86) 2180361968
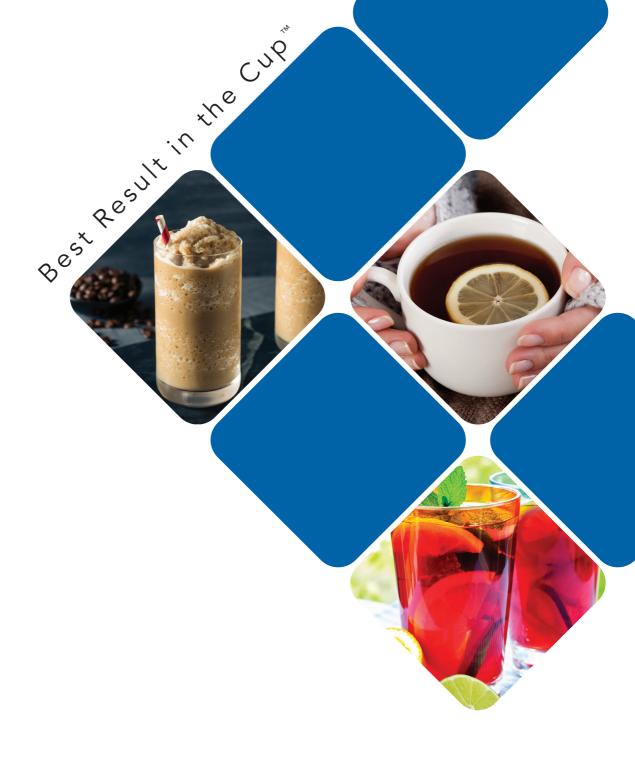Mobile: (+86) 13760473246
thomas.wang@bunn.com

Eleanor Sun
Asia Distribution Centre Director
China
Office: (+86) 2180361968
Mobile: (+86) 13917306041
eleanor.sun@bunn.com

Diana Ding
Senior Project Manager
China
Office: (+86) 2180361968
Mobile: (+86) 13918760345
diana.ding@bunn.com

Best Result in the Cup™

BUNN®

CORPORATE HEADQUARTERS

5020 Ash Grove Drive, Springfield, IL USA 62711
(+1) 217-529-6601 • 800-637-8606

www.bunn.com