



Nitron consistently dispenses Cold Brew without sacrificing quality. The keg-free design makes Nitron the ideal platform for delivering authentic Cold Brew taste without the need for a complex or lengthy brewing process. The two-tap design on the Standard Nitron dispenses one Still and one Nitro-infused beverage. Further options include All-Nitro dispense configurations, ball-valve and Scholle connectors, as well as a Removable Graphic Door.



All-Nitro

Need more than one Nitro tap? The All-Nitro model infuses beverages with micro-bubbles from both taps enabling Nitron to quickly serve high volume demands.



Removable Graphic Door

Swapping the marketing panel on the front of the machine is a simple process with the Removable Graphic Door models. The front panel allows for easy removal and installation of graphics without tools, allowing your Nitron to promote your current menu.





Keg Free

Achieve a nitro infusion with no kegs to change-out, store, clean or sanitize! Uses concentrate BIBs or BUNN refillable containers that your staff is already familiar with. Each BIB yields multiple gallons of finished drinks.

Customizable Styling




Have your own taps and graphics? The chrome-plated brass tap handles and the LEDlighted door graphics (on RGD models) can be swapped to reflect your unique brands and beverage offerings.

Narrow Footprint

Cold Brew Coffee, Iced Coffee, or Iced Tea - all from a sleek 10-inch wide footprint.



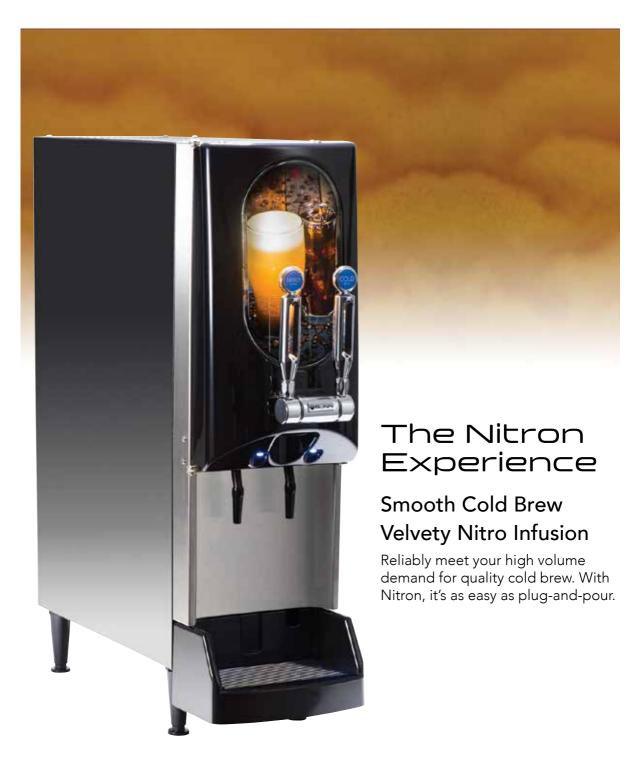





Nitron Gas Module – No need for high-pressure tanks or nitrogen generators! This compact, space-saving system is compatible with all Nitron models and replaces nitrogen tanks and generators providing an unlimited supply of gas by filtering impurities from the surrounding air.

MODELS

MATERIAL	Metal Housing and Stainless Steel
FLOW RATE	1.0oz - 1.5oz per second
VENTILATION	6" Back and top
MINIMUM WATER INLET PRESSURE	30 PSI
MAXIMUM WATER INLET PRESSURE	90 PSI
WATER SUPPLY CONNECTION	3/8" MFL
N2 GAS INPUT CONNECTION	1/4" Male Flare Bulkhead
MINIMUM N2 INLET PRESSURE	120 PSI
MAXIMUM N2 INLET PRESSURE	130 PSI
ICE BANK	8 lbs
GAS	Food-Grade Nitrogen or Compressed Air



Dimensions:

10" W x 28.4" D x 34" H (254mm W x 721.36mm D x 863.6mm H)

Burst Capacity:

At a rate of one 12oz drink per minute, dispenses 60 drinks before exceeding 41°F (75°F incoming water)



HIGH PRESSURE N2 REGULATOR (required for use with tanks - US Only) 125 PSI Maximum Output Product #: 54060.0000



GAS MODULE Product #: 55660.0001

Product #	Model	Door Type	Concentrate Ratio	Connector	Volts	Amps	Watts	Hertz	Phase	Plug	Cord Attached	Agency
US Market												
51600.0009	Nitro/Still	All Black	4:1 - 12:1	Scholle	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) @
51600.0011	All-Nitro	All Black	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF
51600.0016	Nitro/Still	All Black	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) @
51600.0018	Nitro/Still	Removable Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) @
51600.0020	Nitro/Still	Removable Graphic	4:1 - 12:1	Scholle	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) @ "
51600.0022	All-Nitro	Removable Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) @
51600.0028	Nitro/Still with Gas Module	Removable Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF. On Marketon
51600.0029	Nitro/Still with Gas Module	Removable Graphic	4:1 - 12:1	Scholle	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) @
51600.0030	All-Nitro with Gas Module	Removable Graphic	4:1 - 12:1	Ball Valve	120	4.5	540	60	1	NEMA 5-15p	Yes	NSF) @
Europe	, Middle	East and Afric	ca (EMEA)									
51600.0024	Nitro/Still	All Black	4:1 - 12:1	Ball Valve	230V	6	500	50/60	1	EURO	Yes	Œ
51600.0025	Nitro/Still	All Black	4:1 - 12:1	Ball Valve	230V	6	500	50/60	1	UK	Yes	C€

5020 Ash Grove Drive, Springfield, IL 62711 USA (800) 637-8606 | +1 (217) 529-6601 | www.bunn.com

