New family of Infusion Series®
arriving throughout 2017
bunn.com/infusion-series/soft-heat

BUNN®

NEW
Infusion Series®

Twin Brewer with modern
Soft Heat® servers

The new standard in batch brewing



Black/SS model shown
(servers sold separately)

Great Design

Sleek, modernized design language on the brewer and servers

Rounded angles on the corners and trunk

Coordinating petal-shaped handles on brew basket, dispenser faucet, and hot water faucet create intuitive visual cues for user-interaction

Contrasting stainless steel and black colors create a distinctive, refined look

Better positioned fast flow hot water faucet with greater cup clearance

Bright blue LED light indicators prominently show unit is operational

Quality in the Cup

BUNN Infusion Series technology allows for multiple recipes from one footprint with six brew buttons and three batch sizes

Brew batches of .5gal, 1gal or 1.5gal (1.9, 3.8 or 5.7L)

Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction

USB programming

New Soft Heat® servers are ergonomic, lighter weight, energy efficient and now offer programmable recipe/batch based holding times and temperatures, alerting staff when freshness has expired or server is empty

for more information, visit bunn.com/infusion-series/soft-heat

Infusion Series®

Twin Soft Heat® Brewer

(22″ W x 22.3″ D x 32.8″ H)
558mm W x 566mm D x 833mm H

Capacity: 280 8oz (236ml) cups/per hour

Related Products



1.5 Gal SH Server
27850.0200



1SH Stand
27825.0200




2SH Stand
27875.0200





Single Drip Tray
53452.0001



Dual Drip Tray
53452.0000

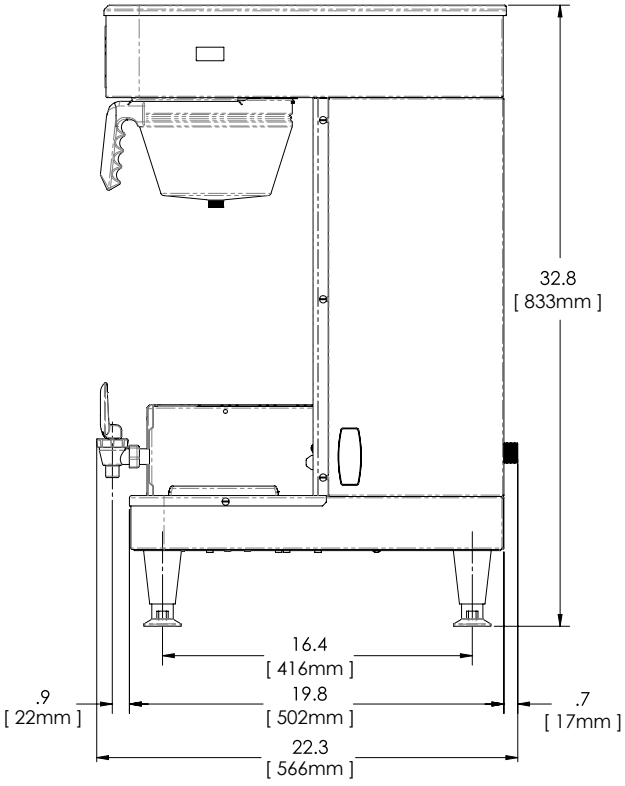

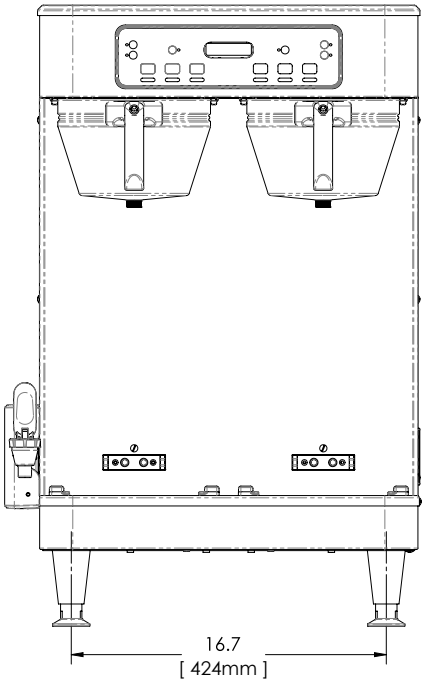

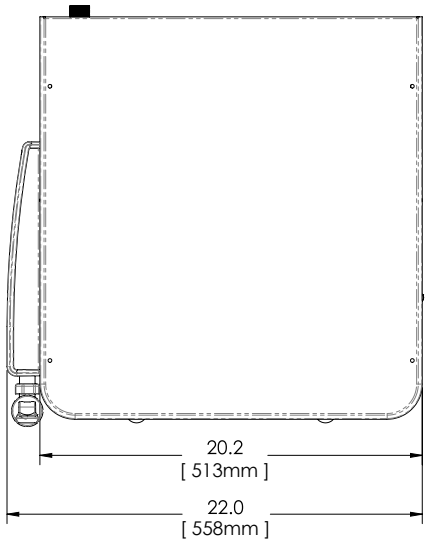

DESCRIPTION			CAPACITY	ELECTRICAL							
Product #	**Model**	**Finish**		**Volts**	**Amps**	**Watts**	**Hertz**	**Input H²O Temp**	**Phase**	**Cord Attached**	**Shipping Weight**
51200.0100	Infusion Twin SH	SS	280 servings/hr	120/240	25	6000	60	60°F (15.5°C)	1	Yes	74.42lbs (33.76kgs)
51200.0101	Infusion Twin SH	Black/SS	280 servings/hr	120/240	25	6000	60	60°F (15.5°C)	1	Yes	74.42lbs (33.76kgs)
Plumbing: 20-90 PSI / 138-621 kPa. 3/8″ Male Flare Fitting											
27850.0200	Infusion SH Server	SS	1.5gal (5.7L)	NA	NA	NA	NA	NA	NA	NA	16.9lbs (7.7kgs)
27825.0200	Infusion 1SH Stand	SS	1 SH Server	120	1.2	138	60	NA	1	Yes	12.55lbs (5.7kgs)
27875.0200	Infusion 2SH Stand	SS	2 SH Servers	120	1.8	216	60	NA	1	Yes	20.95lbs (9.5kgs)

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.



New family of Infusion Series®
arriving throughout 2017
bunn.com/infusion-series/soft-heat

BUNN®

NEW
Infusion Series®

1.5 Gal Modern Soft Heat® Server

Exclusive technology automatically manages heat in the server docking system



Modern Server Capability and Efficiency

BUNN-exclusive Soft Heat server technology automatically docks to the brewer to supply controlled heat to brewed coffee with holding temperatures ideal for optimal flavor for longer periods

New 1.5gal (5.7L) Soft Heat servers are completely modernized, ergonomic, lighter weight and energy efficient, but still constructed of durable stainless steel to withstand the demands of a busy serving environment

Softened, round design with a wider top means inside is easier to access and clean, eliminating the temptation for staff to submerse the unit in water to achieve proper sanitation

Programmable recipe/batch-based holding times and temperatures

Integrated sight gauge assembly provides at-a-glance volume level

Unit alerts staff when freshness has expired or server is empty

New side-mounted bucket or pail-style handle makes transporting more stable for satellite serving, emptying and cleaning

Optional Soft Heat Docking Stand easily creates satellite serving options with multiple servers where heat can continue to be automatically managed through instant power contact in the Stand



Soft Heat® Servers on Stands

for more information, visit bunn.com/infusion-series/soft-heat

BUNN

Infusion Series®

1.5 Gal Soft Heat® Server

14.5" H x 9.1" W x 13.3" D
(367mm x 230mm x 337mm)

Capacity: 1.5 gallons (5.7L)

Related Products



Twin SH Brewer
51200.0101



1SH Stand
27825.0200




2SH Stand
27875.0200





Single Drip Tray
53452.0001



Dual Drip Tray
53452.0000

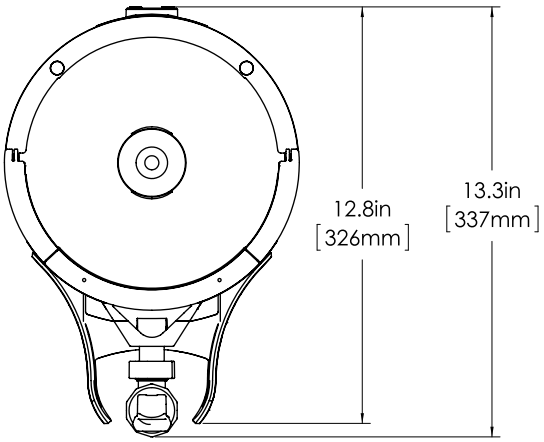

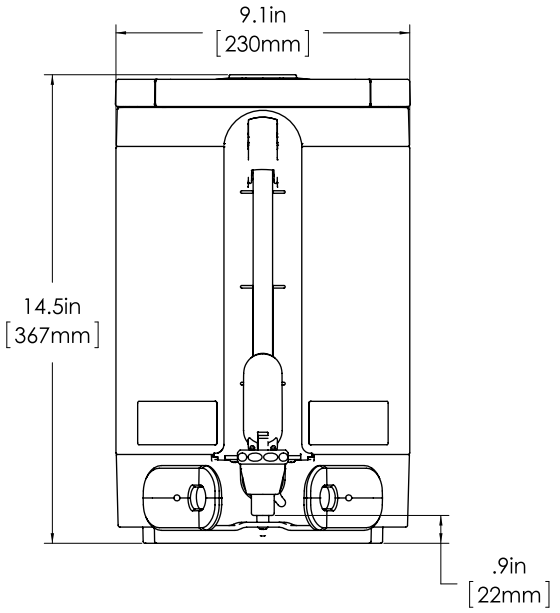

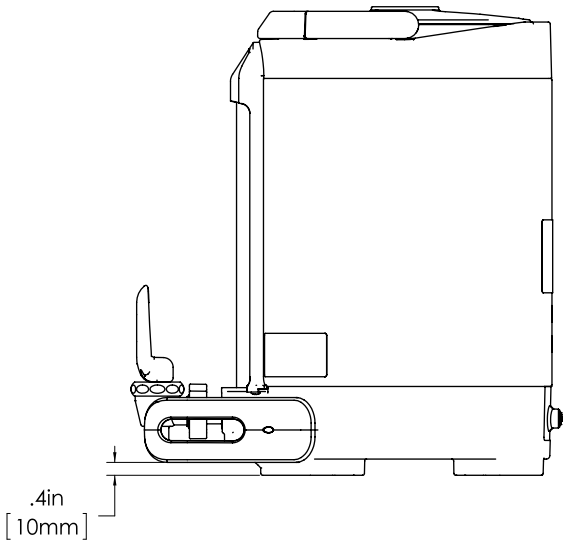

DESCRIPTION			CAPACITY		DIMENSIONS			WEIGHT	AGENCY
Product #	**Model**	**Finish**	**Gallons**	**Liters**	**Height**	**Width**	**Depth**	**Lbs**	**Listing**
27850.0200	1.5 Gal SH Server	SS	1.5	5.7	14.5in	9.1in	13.3in	16.9 (7.7kg)	



New family of Infusion Series®
arriving throughout 2017
bunn.com/infusion-series/soft-heat

BUNN®

NEW
Infusion Series®

1SH & 2SH Docking Stands

Exclusive technology automatically manages heat in Soft Heat® servers





Remote one and two server docking stations for additional satellite coffee serving

Docking stations have instant power contact with servers

Soft Heat® stands supply controlled heat to coffee to maintain flavor and temperature

Compatible with BUNN Soft Heat® brewers and servers

Durable all stainless steel construction

Contemporary styling



Soft Heat® Servers on Stands

for more information, visit bunn.com/infusion-series/soft-heat

BUNN

Infusion Series®

1SH & 2SH Stands

1SH Stand
9.3" H x 10.2" W x 11.8" D (236mm x 258mm x 299mm)

2SH Stand
9.3" H x 20.2" W x 11.8" D (236mm x 512mm x 299mm)

Capacities: 1SH Stand = 1 SH Server
2SH Stand = 2 SH Servers

Related Products



Twin SH Brewer
51200.0101




1.5 Gal SH Server
27850.0200




Single Drip Tray
53452.0001




Dual Drip Tray
53452.0000

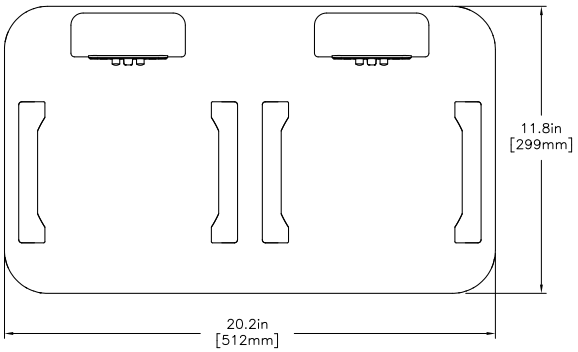

2SH Stand Dimensions

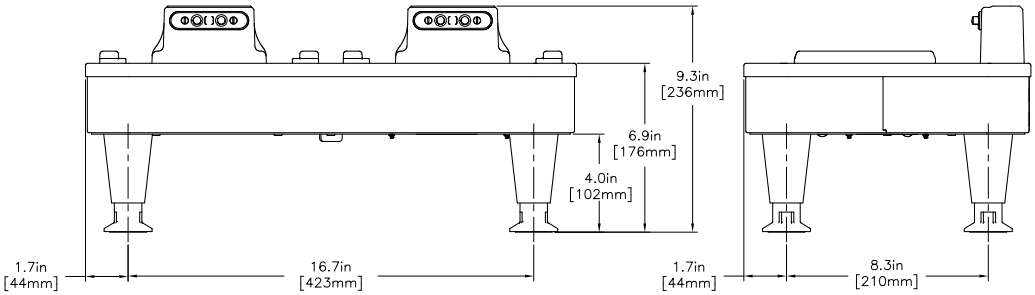

1SH Stand Dimensions

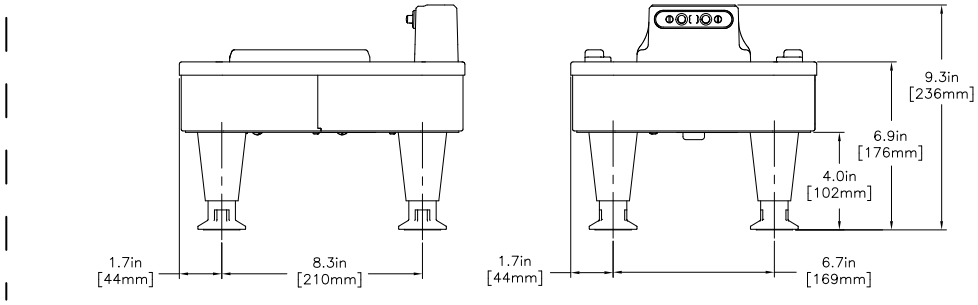

DESCRIPTION			CAPACITY	ELECTRICAL					WEIGHT	AGENCY
Product #	**Model**	**Finish**		**Volts**	**Amps**	**Watts**	**Hertz**	**Phase**	**Lbs**	**Listing**
27825.0200	1SH Stand	SS	1 SH Server	120	1.2	138	60	1	12.5 (5.6kg)	NSF UL LISTED
27875.0200	2SH Stand	SS	2 SH Servers	120	1.8	216	60	1	20.9 (9.5kg)	NSF UL LISTED